



液晶之友 电话: 020-33819057

- ◆ 5 x 7 DOTS WITH CURSOR
- ◆ BUILT-IN CONTRAST ADJUSTMENT
- ◆ 5 V POWER SUPPLY
- ◆ 1/16 DUTY CYCLE
- ◆ 4.2 V LED FORWARD VOLTAGE


ELECTRICAL CHARACTERISTICS

TEST CONDITION		SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
LCD Operating Voltage		$V_{DD}-V_O$	$T=0^{\circ}\text{C}$	-	4.8	-	V
			$T=25^{\circ}\text{C}$	-	4.5	-	V
			$T=50^{\circ}\text{C}$	-	4.2	-	V
Supply Voltage		$V_{DD}-V_{SS}$	-	4.7	5	5.3	V
Supply Current		I_{DD}	-	-	3.2	6	mA
Input	"HIGH" Level	V_{IH}	-	2.2	-	V_{DD}	V
Voltage	"LOW" Level	V_{IL}	-	0	-	0.6	V
Output	"HIGH" Level	V_{OH}	-	2.4	-	-	V
Voltage	"LOW" Level	V_{OL}	-	-	-	0.4	V

MECHANICAL DATA

ITEM	DIMENSIONS	UNIT
Module Size (W x H x T)	87.0 x 60.0 x 8.8 (12.7 LED)	mm
Viewing Area (W x H)	62.0 x 25.6	mm
Character Size (W x H)	2.95 x 4.75	mm
Character Pitch (W x H)	3.55 x 5.35	mm
Dot Size (W x H)	0.55 x 0.55	mm
Dot Pitch (W x H)	0.60 x 0.60	mm

■ BLOCK DIAGRAM

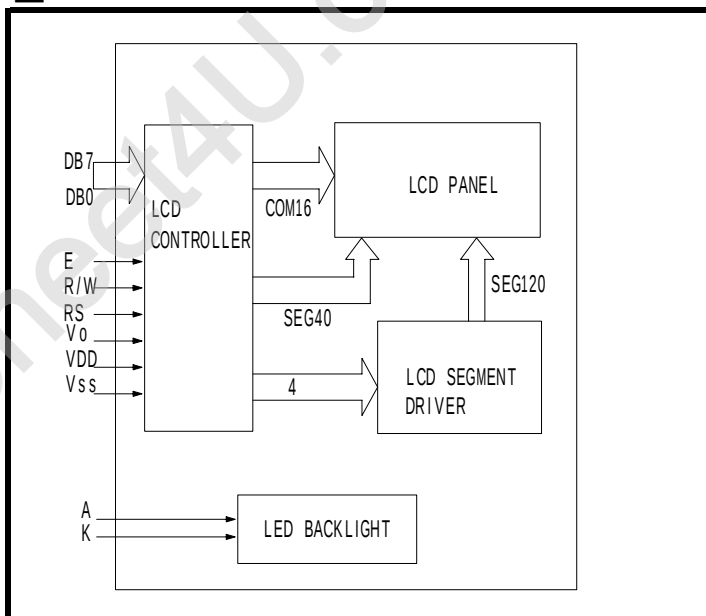

■ INTERFACE PIN CONNECTIONS

NO.	SYMBOL	FUNCTION	NO.	SYMBOL	FUNCTION
1	Vss	Supply Ground	9	DB2	Data Bit 2
2	VDD	Supply Voltage	10	DB3	Data Bit 3
3	Vo	Contrast Adj.	11	DB4	Data Bit 4
4	RS	Register Select	12	DB5	Data Bit 5
5	R/W	Read/Write	13	DB6	Data Bit 6
6	E	Enable Signal	14	DB7	Data Bit 7
7	DB0	Data Bit 0	15	A	LED Power
8	DB1	Data Bit 1	16	K	LED Power

EXTERNAL DIMENSIONS

