

January 8, 1998

TEL:805-498-2111 FAX:805-498-3804 WEB:http://www.semtech.com

### HIGH DENSITY, HIGH VOLTAGE, STANDARD RECOVERY RECTIFIER ASSEMBLY

### QUICK REFERENCE DATA


- High reverse voltages
- Low reverse leakage current
- Low distributed and ground capacitance
- Corona free design
- Air or oil environments

- $V_R = 33\text{kV} - 66\text{kV}$
- $I_F = 300\text{mA}$
- $t_{rr} = 2.5\mu\text{s}$
- $I_R = 1.0\mu\text{A}$

### ABSOLUTE MAXIMUM RATINGS

	Symbol	SCKV33K12	SCKV45K12	SCKV66K12	Unit
Working reverse voltage	VRWM	33	45	66	kV
Surge reverse voltage	VRSM	36.3	49.5	72.6	kV
Average forward current in air @ 25°C	IF(AV)	300			mA
in oil @ 55°C		1200			mA
in forced air 600 CFM		600			mA
Non-repetitive surge current $t_p = 8.3\text{ms}$ , @ 25°C	IFSM	14.0			A
Storage temperature range	TSTG	-55 to +150			°C
Operating temperature range	TOP	-55 to +150			°C
Body length Max.	dim B	4.53	6.66	8.78	inches

### MECHANICAL

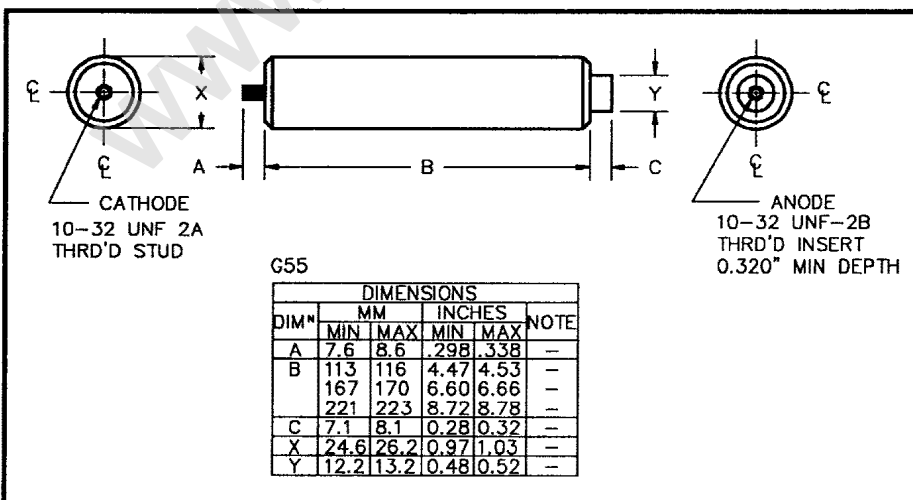

January 8, 1998

### ELECTRICAL CHARACTERISTICS

	Symbol	SCKV33K12	SCKV45K12	SCKV66K12	Unit
Max. forward voltage drop @ $I_F = 1.0A$ , $T_j = 25^\circ C$	$V_F$	60.0	95.0	125.5	V
Max. reverse leakage current @ $V_{RWM}$ , $T_j = 25^\circ C$	$I_R$	←	1.0	→	$\mu A$
@ $V_{RWM}$ , $T_j = 100^\circ C$	$I_R$	←	20	→	$\mu A$
Max. reverse recovery time 0.5A $I_F$ to 1.0A $I_R$ . Recovers to 0.25A $I_{RR}$ .	$t_{rr}$	←	2.5	→	$\mu S$
Max. fusing current $t_p = 8.3ms$	$I^2t$	←	0.8	→	$A^2S$

1. Measured on discrete devices prior to assembly

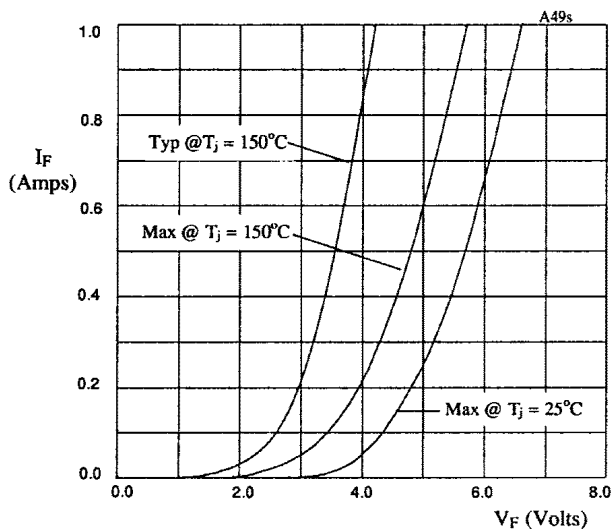


Fig 1. Forward voltage drop as a function of forward current for use with multiplication table.

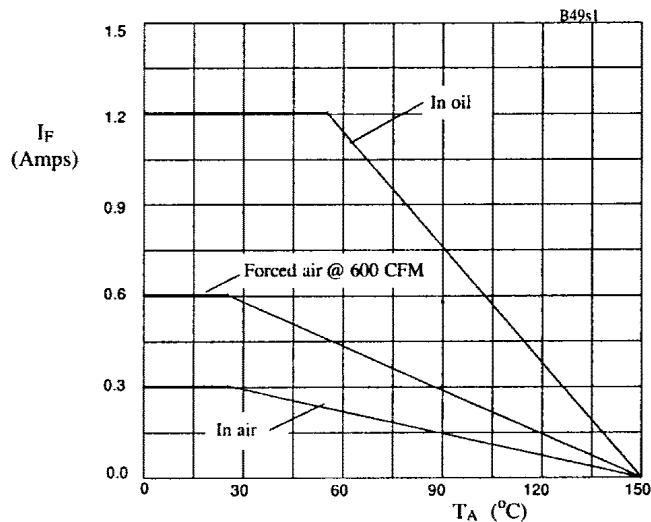


Fig 2. Maximum average forward current against ambient temperature.

Multiplication tables for fig 1.

SCKV33K12	X-axis x12
SCKV45K12	X-axis x19
SCKV66K12	X-axis x25