

2. 0mm Pitch Crimp Connector

Specifications :

Current Rating : 2AAC,DC



Voltage Rating : 100V AC,DC

Temperature Range : -25 deg C ~+85 deg C

Contact Resistance : 20m Omega Max.

Insulation Resistance : 1000M Omega Min.

Withstanding Voltage : 800V AC/minute

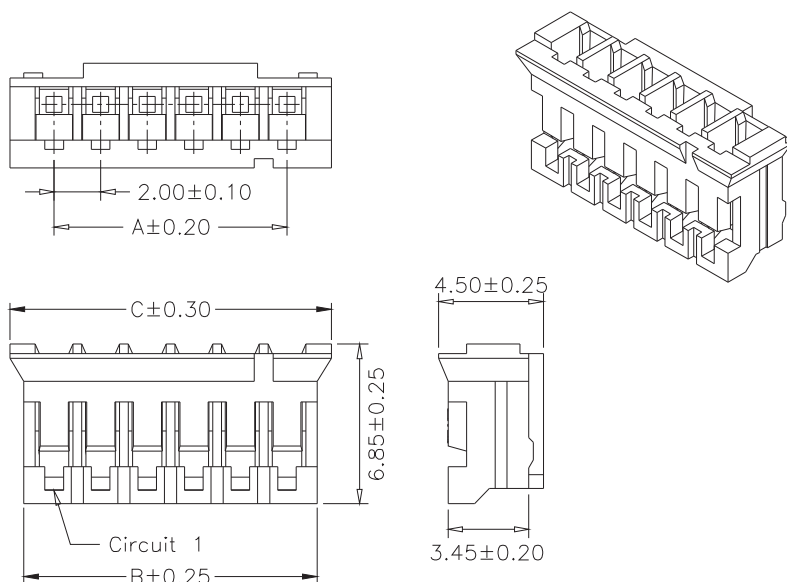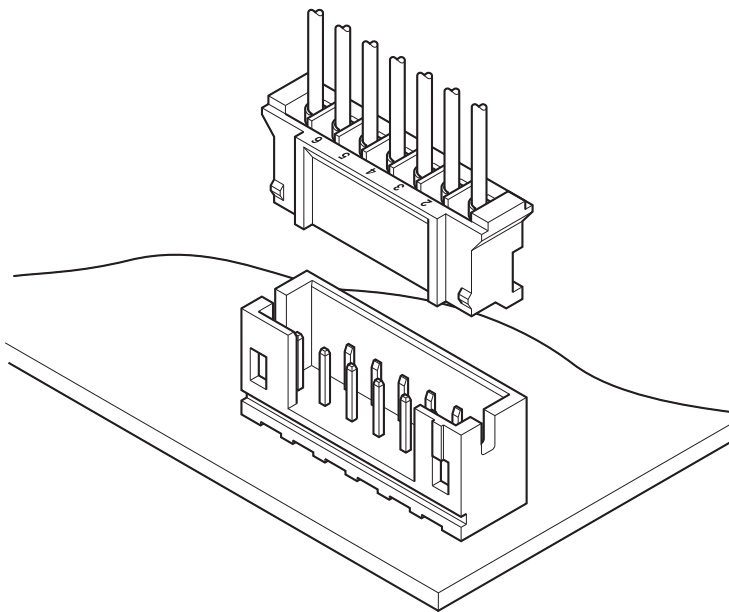

Part No:SCT2001H-XXP


Poles:2-16P.

Material:Nylon66 UL94V2

Packing Q'TY:1000pcs/bag

Mates With SCT2001T Series Terminal

NO	PART NO	DIMENSION		
		A	B	C
1	SCT2001H-02	2.00	4.60	5.80
2	SCT2001H-03	4.00	6.60	7.80
3	SCT2001H-04	6.00	8.60	9.80
4	SCT2001H-05	8.00	10.60	11.80
5	SCT2001H-06	10.00	12.60	13.80
6	SCT2001H-07	12.00	14.60	15.80
7	SCT2001H-08	14.00	16.60	17.80
8	SCT2001H-09	16.00	18.60	19.80
9	SCT2001H-10	18.00	20.60	21.80
10	SCT2001H-11	20.00	22.60	23.80
11	SCT2001H-12	22.00	24.60	25.80
12	SCT2001H-13	24.00	26.60	27.80
13	SCT2001H-14	26.00	28.60	29.80
14	SCT2001H-15	28.00	30.60	31.80
15	SCT2001H-16	30.00	32.60	33.80

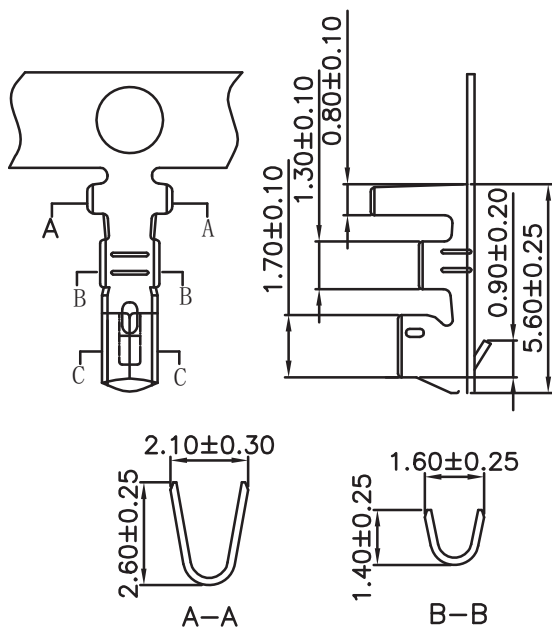

Part No:SCT2001-T

Thickness:0.20mm

Material:Phosphor bronze/ Brass

Finish:Tin Plated

Wire Range:AWG#22-#28

Insulation O.D. : 1.50mm (Max.)

Q'TY:10,000pcs/reel

Part No:SCT2001WV-XXP
Poles:2-16P
Material:Nylon66 UL94V-2
Packing Q'TY:1000pcs/box
Mates With SCT2001H- Series Housing

NO	PART NO	DIMENSION	
		A	B
1	SCT2001WV-02	2.00	6.00
2	SCT2001WV-03	4.00	8.00
3	SCT2001WV-04	6.00	10.00
4	SCT2001WV-05	8.00	12.00
5	SCT2001WV-06	10.00	14.00
6	SCT2001WV-07	12.00	16.00
7	SCT2001WV-08	14.00	18.00
8	SCT2001WV-09	16.00	20.00
9	SCT2001WV-10	18.00	22.00
10	SCT2001WV-11	20.00	24.00
11	SCT2001WV-12	22.00	26.00
12	SCT2001WV-13	24.00	28.00
13	SCT2001WV-14	26.00	30.00
14	SCT2001WV-15	28.00	32.00
15	SCT2001WV-16	30.00	34.00

Part No:SCT2001WR-XXP
Poles:2-16P
Material:Nylon66 UL94V-2
Packing Q'TY:1000pcs/box
Mates With SCT2001H- Series Housing

NO	PART NO	DIMENSION	
		A	B
1	SCT2001WR-02	2.00	6.00
2	SCT2001WR-03	4.00	8.00
3	SCT2001WR-04	6.00	10.00
4	SCT2001WR-05	8.00	12.00
5	SCT2001WR-06	10.00	14.00
6	SCT2001WR-07	12.00	16.00
7	SCT2001WR-08	14.00	18.00
8	SCT2001WR-09	16.00	20.00
9	SCT2001WR-10	18.00	22.00
10	SCT2001WR-11	20.00	24.00
11	SCT2001WR-12	22.00	26.00
12	SCT2001WR-13	24.00	28.00
13	SCT2001WR-14	26.00	30.00
14	SCT2001WR-15	28.00	32.00
15	SCT2001WR-16	30.00	34.00




Part No:SCT2001WV-S-XXP
Poles:2-16P
Material:Nylon9T UL94V-0
Pin: Brass, Tin Plated
Packing Q'TY:700pcs/box
Mates With SCT2001H- Series Housing

PART NO.	Dimensions	
	A	B
SCT2001WV-S-02P	2.00	8.00
SCT2001WV-S-03P	4.00	10.00
SCT2001WV-S-04P	6.00	12.00
SCT2001WV-S-05P	8.00	14.00
SCT2001WV-S-06P	10.00	16.00
SCT2001WV-S-07P	12.00	18.00
SCT2001WV-S-08P	14.00	20.00
SCT2001WV-S-09P	16.00	22.00
SCT2001WV-S-10P	18.00	24.00
SCT2001WV-S-11P	20.00	26.00
SCT2001WV-S-12P	22.00	28.00
SCT2001WV-S-13P	24.00	30.00
SCT2001WV-S-14P	26.00	32.00
SCT2001WV-S-15P	28.00	34.00
SCT2001WV-S-16P	30.00	36.00





SCT2001 SERIES

2.00mm Pitch Wire to Board Crimp Connector

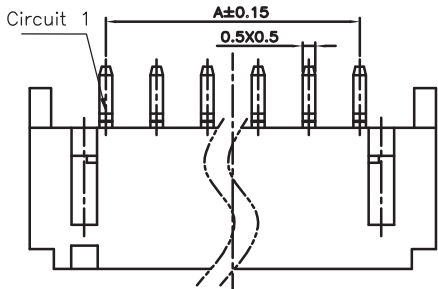


Part No:SCT2001WR-S-XXP
Poles:2-16P
Material:Nylon6T UL94V-0
Pin: Brass, Tin Plated
Packing Q'TY:1000pcs/box
Mates With SCT2001H- Series
Single Row Housing

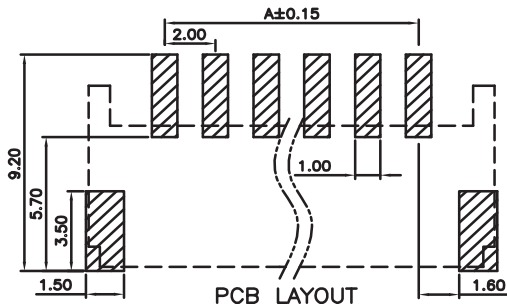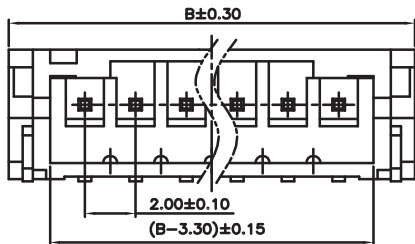

PART NO.	Dimensions	
	A	B
SCT2001WR-S-2P	2.00	8.00
SCT2001WR-S-3P	4.00	10.00
SCT2001WR-S-4P	6.00	12.00
SCT2001WR-S-5P	8.00	14.00
SCT2001WR-S-6P	10.00	16.00
SCT2001WR-S-7P	12.00	18.00
SCT2001WR-S-8P	14.00	20.00
SCT2001WR-S-9P	16.00	22.00
SCT2001WR-S-10P	18.00	24.00
SCT2001WR-S-11P	20.00	26.00
SCT2001WR-S-12P	22.00	28.00
SCT2001WR-S-13P	24.00	30.00
SCT2001WR-S-14P	26.00	32.00
SCT2001WR-S-15P	28.00	34.00
SCT2001WR-S-16P	30.00	36.00

How to Order Wire Harness?

A Type

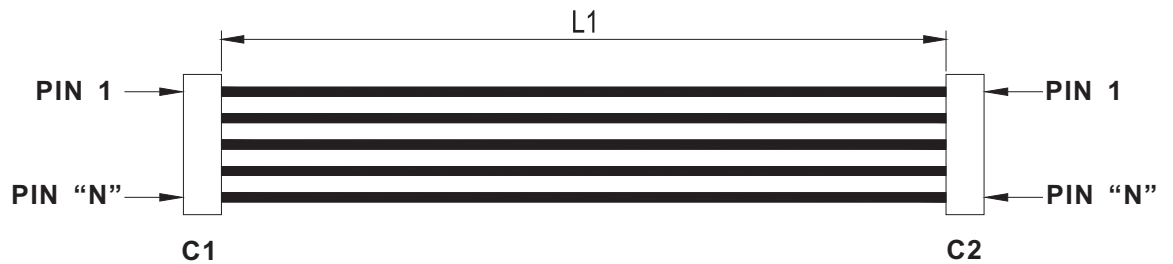

Type A Configuration:

Type A Connector C1: _____

Type A Connector C2: _____

Type A L1 = _____ mm

Tolerance For L1= +/- _____ mm


Wire Specification:

UL Style: _____ AWG: _____

Pin Assignments And Wire Color

C1 Pin NO.-----Wire Color-----C2 Pin NO.

B Type

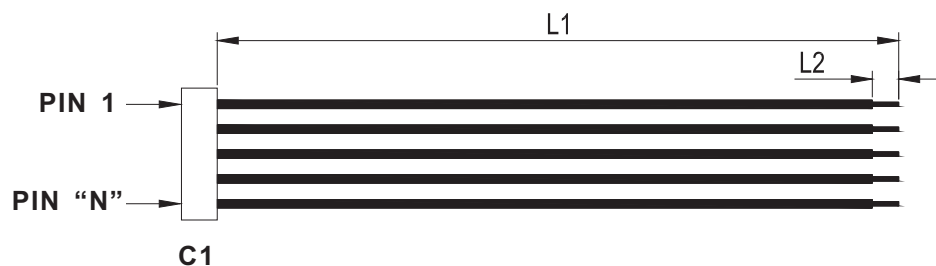

Type B Configuration:

Type B Connector C1: _____

Type B L1 = _____ mm

Tolerance For L1= +/- _____ mm

Strip L2 = _____ mm

Tolerance For Strip L2= +/- _____ mm

Wire Specification:

UL Style: _____ AWG: _____

Pin Assignments And Wire Color

C1 Pin NO.-----Wire Color
