

DATA SHEET

SD320YT~SD3100YT

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIERS

VOLTAGE 20 to 100 Volts **CURRENT** 3.0 Ampere

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- For surface mounted applications
- Low profile package
- Built-in strain relief
- Low power loss, High efficiency
- High surge capacity
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications

MECHANICAL DATA

Case: TO-251AB molded plastic


Terminals: Solder plated, solderable per MIL-STD-750, Method 2026

Polarity: As marking

Weight: 0.015 ounces, 0.4grams.

TO-251AB

Unit : inch (mm)

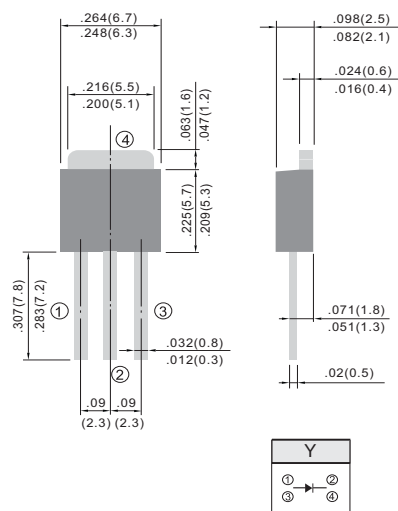

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

PARAMETER	SYMBOL	SD320YT	SD330YT	SD340YT	SD350YT	SD360YT	SD380YT	SD3100YT	UNITS
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	20	30	40	50	60	80	100	V
Maximum RMS Voltage	V _{RMS}	14	21	28	35	42	56	70	V
Maximum DC Blocking Voltage	V _{DC}	20	30	40	50	60	80	100	V
Maximum Average Forward Rectified Current .375"(9.5mm) lead length at T _C =75°C	I _{AV}	3.0							A
Peak Forward Surge Current : 8.3ms single half sine-wave superimposed on rated load(JEDEC method)	I _{FSM}	75							A
Maximum Forward Voltage at 3.0A	V _F	0.50			0.64		0.85		V
Maximum DC Reverse Current at Rated DC Blocking Voltage T _C =25°C Maximum DC Reverse Current at Rated DC Blocking Voltage T _C =100°C	I _R	0.2 20							mA
Maximum Thermal Resistance	R _{θJC}	5.0							°C / W
Operating Junction Temperature Rang	T _J	-50 to +125							°C
Storage Temperature Rang	T _{STG}	-65 to +150							°C

RATING AND CHARACTERISTIC CURVES

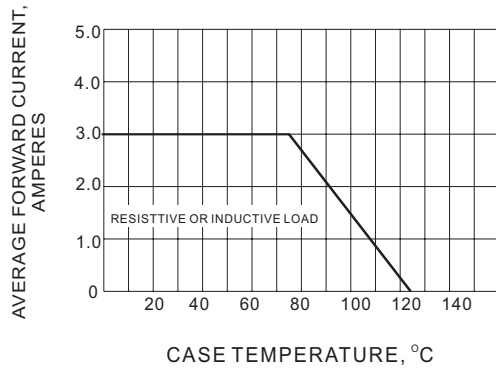


Fig.1- FORWARD CURRENT DERATING CURVE

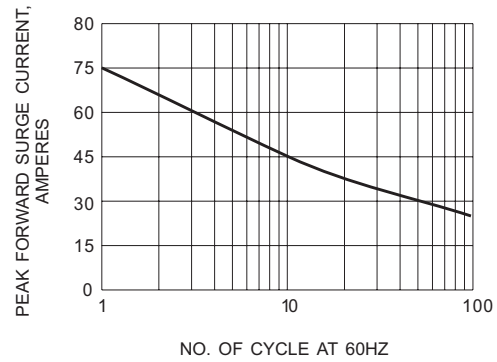


Fig.2- MAXIMUM NON - REPETITIVE SURGE CURRENT

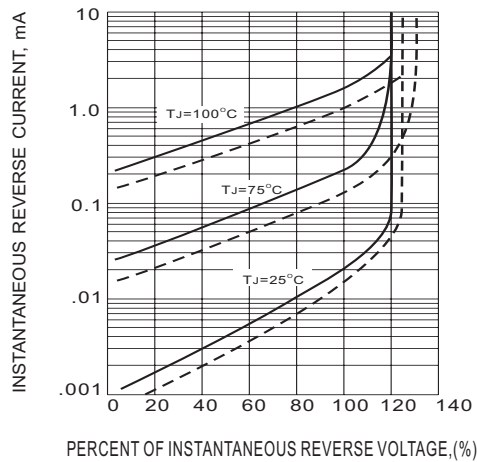


Fig.3- TYPICAL REVERSE CHARACTERISTICS

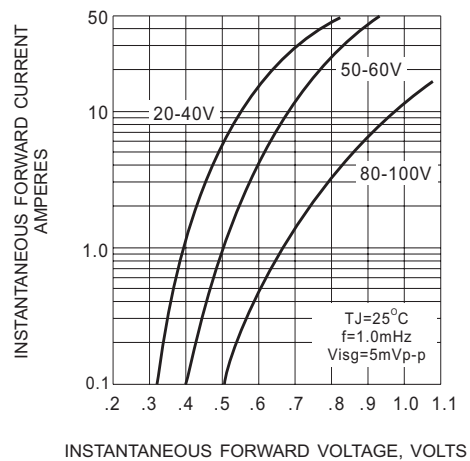


Fig.4- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS