


Wire Wound Chip Common Mode Choke Coil – SDCW Series

Operating Temp. : -40℃~+85℃



FEATURES

- Winding type realizes small size and low profile
- Prevention of common mode noise at high frequency
- 30Ω~2200Ω are optional for different noise level and signal frequency
- Excellent solderability

APPLICATIONS

- USB2.0 of PC, peripheral equipments, small digital AV equipments, etc.
- LVDS lines of Note PC, LCD
- Audio lines

PRODUCT IDENTIFICATION

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③

④

⑤

⑥

①

②

③


④

⑤


⑥

SHAPE AND DIMENSIONS

SDCW2012 Type

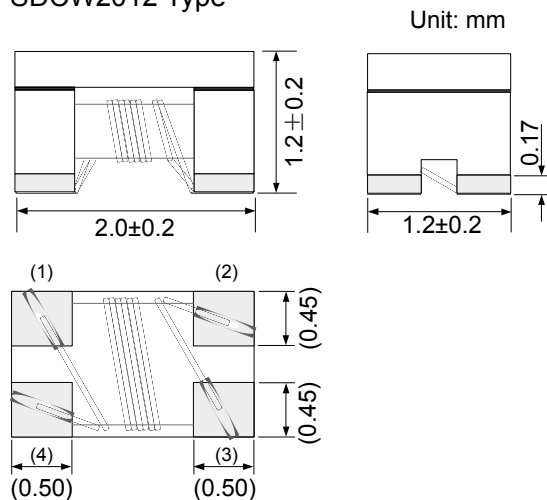

SDCW3216 Type

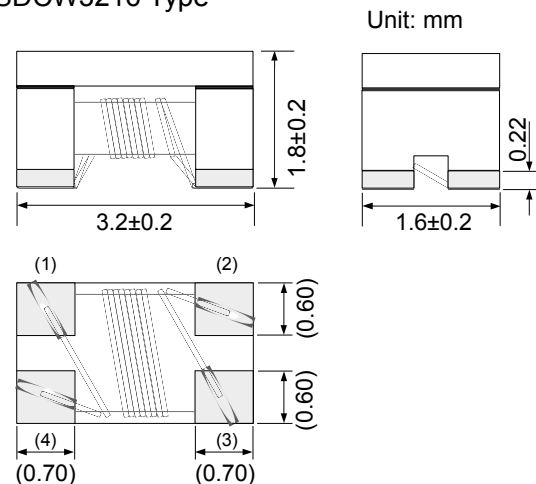

SPECIFICATIONS

SDCW2012 TYPE


Part Number	Common Mode Impedance @100MHz	Max. DC Resistance	Max. Rated Current	Rated Voltage	Min. Insulation Resistance
Units	Ω	Ω	mA	Volts	M Ω
Symbol	Z	DCR	I _r	V _{DC}	IR
SDCW2012-2-300TF	30±25%	0.20	450	50	10
SDCW2012-2-670TF	67±25%	0.25	400	50	10
SDCW2012-2-900TF	90±25%	0.35	330	50	10
SDCW2012-2-121TF	120±25%	0.30	370	50	10
SDCW2012-2-181TF	180±25%	0.35	330	50	10
SDCW2012-2-201TF	200±25%	0.40	300	50	10
SDCW2012-2-221TF	220±25%	0.40	300	50	10
SDCW2012-2-261TF	260±25%	0.40	300	50	10
SDCW2012-2-361TF	360±25%	0.45	280	50	10
SDCW2012-2-371TF	370±25%	0.45	280	50	10
SDCW2012-2-601TF	600±25%	0.55	200	50	10
SDCW2012-2-751TF	750±25%	0.70	180	50	10
SDCW2012-2-901TF	900±25%	0.80	150	50	10
SDCW2012-2-102TF	1000±25%	0.80	150	50	10

SDCW3216 TYPE

Part Number	Common Mode Impedance @100MHz	Max. DC Resistance	Max. Rated Current	Rated Voltage	Min. Insulation Resistance
Units	Ω	Ω	mA	Volts	M Ω
Symbol	Z	DCR	I _r	V _{DC}	IR
SDCW3216-2-900TF	90±25%	0.30	370	50	10
SDCW3216-2-161TF	160±25%	0.40	340	50	10
SDCW3216-2-261TF	260±25%	0.50	310	50	10
SDCW3216-2-601TF	600±25%	0.80	260	50	10
SDCW3216-2-102TF	1000±25%	1.00	230	50	10
SDCW3216-2-222TF	2200±25%	1.20	200	50	10

※Products with other electrical characteristics can be provided upon customer's request. Please contact your local sales.


EQUIVALENT CIRCUIT

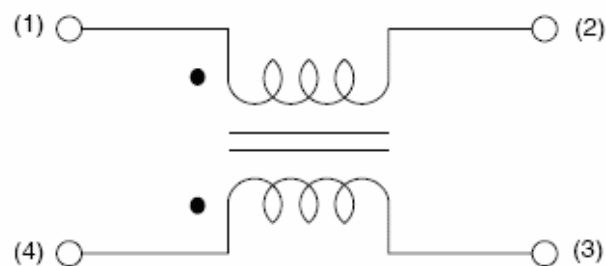


TYPICAL ELECTRICAL CHARACTERISTICS

Impedance vs. Frequency

SDCW2012 TYPE
(30~360Ω)

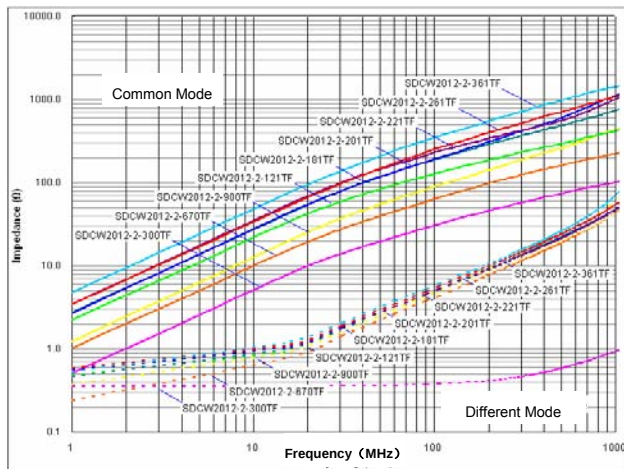

SDCW2012 TYPE
(370~1000Ω)

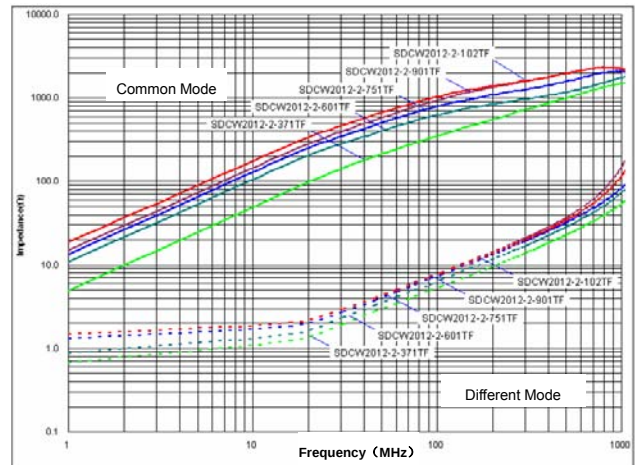

SDCW3216 TYPE

