

Wire Wound Chip Common Mode Choke Coil – SDCW-C Series

Operating Temp. : -40℃~+85℃



FEATURES

- Winding type and low profile
- Prevention of common mode noise at high frequency
- 67Ω~180Ω are optional for different noise level and signal frequency

APPLICATIONS


- USB2.0 of PC, peripheral equipments, small
- LVDS lines of Note PC, LCD

PRODUCT IDENTIFICATION

<u>SDCW</u> ①	<u>2012</u> ②	<u>C</u> ③	<u>-2</u> ④	<u>-900</u> ⑤	<u>T</u> ⑥	<u>F</u> ⑦														
①		②			③															
<table><tr><td colspan="2">Type</td></tr><tr><td>SDCW</td><td>Winding Type Common Mode Choke Coil</td></tr></table>		Type		SDCW	Winding Type Common Mode Choke Coil	<table><tr><td colspan="2">(L×W) (mm)</td></tr><tr><td colspan="2">External Dimensions (L×W) (mm)</td></tr><tr><td>2012 [0805]</td><td>2.0×1.3</td></tr></table>		(L×W) (mm)		External Dimensions (L×W) (mm)		2012 [0805]	2.0×1.3	<table><tr><td colspan="2">Code</td></tr><tr><td>C</td><td>Coating</td></tr></table>			Code		C	Coating
Type																				
SDCW	Winding Type Common Mode Choke Coil																			
(L×W) (mm)																				
External Dimensions (L×W) (mm)																				
2012 [0805]	2.0×1.3																			
Code																				
C	Coating																			
		④																		
		<table><tr><td colspan="2">Number of Lines</td></tr><tr><td colspan="2">2</td></tr></table>		Number of Lines		2														
Number of Lines																				
2																				
⑤					⑦															
<table><tr><td colspan="2">Impedance</td></tr><tr><td>Example</td><td>Nominal Value</td></tr><tr><td>900</td><td>90Ω</td></tr></table>		Impedance		Example	Nominal Value	900	90Ω	⑥	<table><tr><td colspan="2">Packing</td></tr><tr><td>T</td><td>Tape & Reel</td></tr></table>		Packing		T	Tape & Reel	<table><tr><td colspan="2">Hazardous Substance Free Products</td></tr><tr><td colspan="2">F</td></tr></table>		Hazardous Substance Free Products		F	
Impedance																				
Example	Nominal Value																			
900	90Ω																			
Packing																				
T	Tape & Reel																			
Hazardous Substance Free Products																				
F																				

SHAPE AND DIMENSIONS

SDCW2012C TYPE

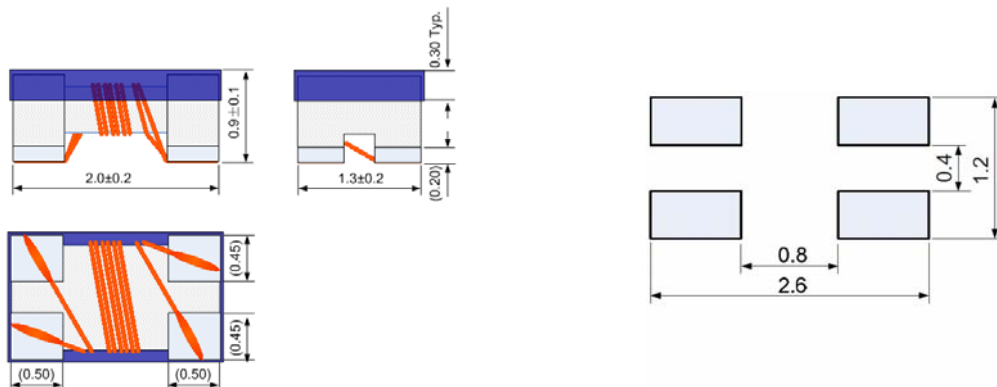


SPECIFICATIONS

SDCW2012-C TYPE

Part Number	Common Mode Impedance @100MHz	Max. DC Resistance	Max. Rated Current	Rated Voltage	Min. Insulation Resistance
Units	Ω	Ω	mA	Volts	M Ω
Symbol	Z	DCR	I _r	V _{DC}	IR
SDCW2012C-2-670TF	67±25%	0.35	330	50	10
SDCW2012C-2-900TF	90±25%	0.35	330	50	10
SDCW2012C-2-121TF	120±25%	0.45	280	50	10
SDCW2012C-2-181TF	180±25%	0.50	250	50	10

※Products with other electrical characteristics can be provided upon customer's request. Please contact your local sales.

EQUIVALENT CIRCUIT

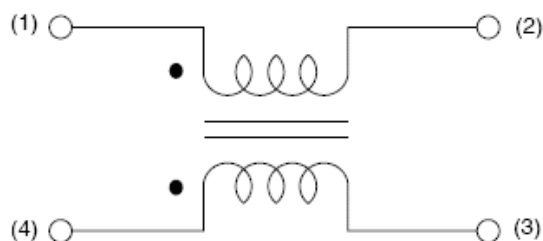

TYPICAL ELECTRICAL CHARACTERISTICS

Impedance vs. Frequency

