

Designer's Data Sheet


FEATURES:

- Soft Recovery Diode
- Ultrafast Recovery: 80 nsec Maximum
- Faster recovery versions available
- High Surge Rating
- Low Reverse Leakage Current
- Low Junction Capacitance
- Hermetically Sealed Surface Mount Package
- Gold Eutectic Die Attach available
- Ultrasonic Aluminum Wire Bonds
- TX, TXV and Space Level Screening Available

**SDR936
 thru
 SDR939**

**30 AMP
 600-900 VOLTS
 80 nsec
 ULTRA FAST
 RECTIFIER**

MILPACK™

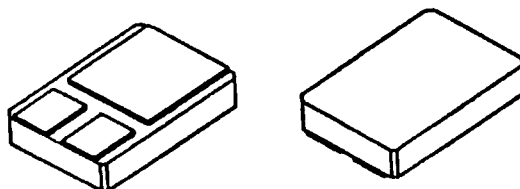

MAXIMUM RATINGS

RATING	SYMBOL	VALUE	UNIT
Peak Repetitive Reverse and DC Blocking Voltage	VRRM VRWM VR	600 700 800 900	Volts
Average Rectified Forward Current (Resistive Load, 60Hz, Sine Wave, TA=25°C)	IO	30	Amps
Peak Surge Current (8.3 ms Pulse, Half Sine Wave, TA=25°C) note 1	IFSM	600	Amps
Operating and storage temperature	Top & Tstg	-65 to +200	°C
Maximum Thermal Resistance Junction to Case	RθJC	1.45	°C/W

Note 1: Connect pin 2 and 3 together

NOTE: All specifications are subject to change without notification.
 SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET#: RU0071 A

MED

SDR936 thru SDR939

PRELIMINARY



SOLID STATE DEVICES, INC

14849 Firestone Boulevard · La Mirada, CA 90638
Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424

ELECTRICAL CHARACTERISTICS



CHARACTERISTICS	SYMBOL	MAXIMUM	UNIT
Instantaneous Forward Voltage Drop (note 1) (IF = 15 Adc, TA=25°C, 300ms Pulse) (IF = 30 Adc, TA=25°C, 300ms Pulse)	VF	1.2 1.3	Vdc
Instantaneous Forward Voltage Drop (note 1) (IF = 15 Adc, TA=100°C, 300ms Pulse) (IF = 15 Adc, TA= - 55°C, 300ms Pulse)	VF	1.1 1.3	Vdc
Reverse Leakage Current (Rated VR, TA=25°C, 300ms pulse minimum)	IR	100	μA
Reverse Leakage Current (Rated VR, TA=100°C, 300ms pulse minimum)	IR	10	mA
Junction Capacitance (VR = 10 Vdc, TA=25°C, f= 1 MHz)	CJ	100	pf
Reverse Recovery Time (IF=500mA, IR=1 A, IRR=250mA, TA=25°C)	trr	80	nsec

CASE OUTLINE: MILPACK

PIN OUT:

PIN 1: CATHODE
PIN 2: ANODE
PIN 3: ANODE

Note 1:
Connect Pin 2 and 3
together for
best VF performance

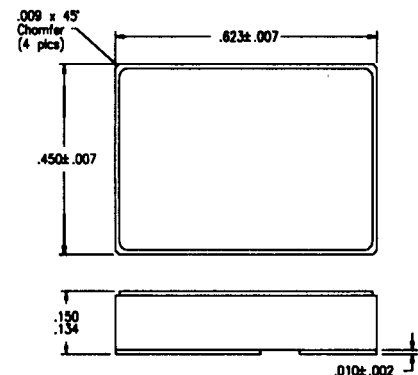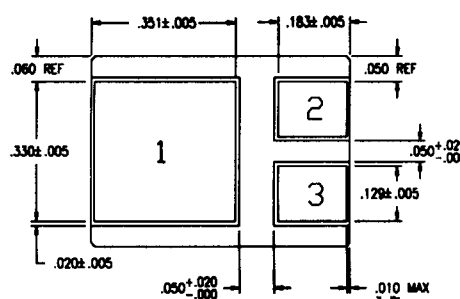

TYPICAL OPERATING CURVES

TA=25°C Unless otherwise specified

