



Solid State Devices, Inc.

14701 Firestone Blvd * La Mirada, Ca 90638
 Phone: (562) 404-4474 * Fax: (562) 404-1773
 ssdi@ssdi-power.com * www.ssdi-power.com


Designer's Data Sheet

FEATURES:

- Fast Reverse Recovery: 300 nsec Maximum
- PIV 2,200 Volts
- Hermetically Sealed
- Void-Free Construction
- Metallurgically Bonded
- 175°C Maximum Operating Temperature
- Miniature Package
- TX, TXV, and Space Level Screening Available
- Lead Free Termination Available, Contact Factory

SDRS614LL

250 mA
2,200 VOLTS
FAST RECOVERY
HIGH VOLTAGE RECTIFIER

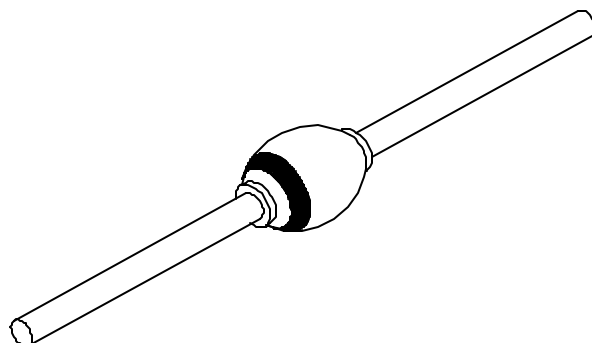ELECTRICAL CHARACTERISTICS ^{1/ 2/ 3/ 4/}

Part Number	Peak Inverse Voltage	Average Rectified Current	Reverse ^{5/} Recovery Time	Maximum Junction Capacitance	Maximum Surge Current (1 Cycle)	Typical Thermal Impedance	Maximum Forward Voltage		Maximum Reverse Current	
Symbol	PIV	I _O	t _{rr}	C _J	I _{FSM}	θ _{JL}	V _F		I _R @ 80% of PIV	
Units	Volts	mA	nsec	pF	Amps	°C/W	Volts		μA	
Conditions			Max	V _R = 100V, f _T = 1MHz		L = ¼"	60mA	250mA	25°C	100°C
	2,200	250	300	5.0	20	45	1.7	2.2	1.0	30

NOTES:

^{1/} Unless Otherwise Specified, All Electrical Characteristics @25°C.


^{2/} Operating and testing over 10,000 V/inch may require encapsulation or immersion in suitable dielectric material.

^{3/} Maximum lead temperature for soldering is 250°C, 3/8" from case for 5 sec. maximum.

^{4/} Operating and storage temperature: -65°C to +175°C.

^{5/} Recovery Conditions I_F = 1/2 A, I_R = 1.0 A rec. to 1/4 A.

PACKAGE OUTLINE: AXIAL RECTIFIER

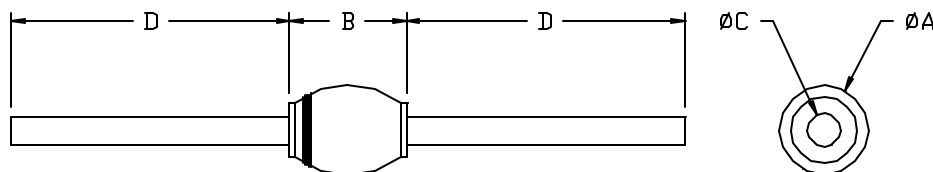

DIMENSIONS

CODE	MIN	MAX
A	---	.135"
B	---	.170"
C	.028"	.032"
D	1.0"	---

NOTE: All specifications are subject to change without notification.
 SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: RC0100A

DOC