

N-Channel MOSFET

DESCRIPTION

The SE2310 uses advanced trench technology to provide excellent $R_{DS(ON)}$, low gate charge and operation with gate voltage as low as 2.5V. This device is suitable for use as a battery protection or in other switching application.

FEATURES

- High power and current handing capability
- Lead free product is acquired
- Surface mount package


APPLICATION

- Battery Switch
- DC/DC Converter

MARKING: S10

Maximum ratings ($T_a=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	60	V
Gate-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current	I_D	3	A
Pulsed Drain Current (note 1)	I_{DM}	10	A
Power Dissipation	P_D	0.35	W
Thermal Resistance from Junction to Ambient (note 2)	$R_{\theta JA}$	357	$^{\circ}\text{C/W}$
Junction Temperature	T_J	150	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	-55~+150	$^{\circ}\text{C}$

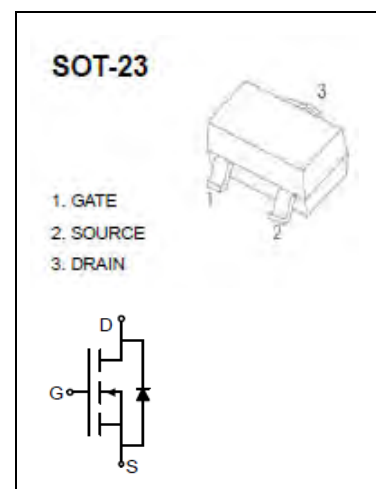

Moisture Sensitivity Level 1

Electrical characteristics (T_a=25°C unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
STATIC CHARACTERISTICS						
Drain-source breakdown voltage	V _{(BR)DSS}	V _{GS} = 0V, I _D =250μA	60			V
Zero gate voltage drain current	I _{DSS}	V _{DS} =60V, V _{GS} = 0V			1	μA
Gate-body leakage current	I _{GSS}	V _{GS} =±20V, V _{DS} = 0V			±100	nA
Gate threshold voltage (note 3)	V _{GS(th)}	V _{DS} =V _{GS} , I _D =250μA	0.5		2	V
Drain-source on-resistance (note 3)	R _{DS(on)}	V _{GS} =10V, I _D =3A			105	mΩ
		V _{GS} =4.5V, I _D =3A			125	mΩ
Forward tranconductance (note 3)	g _{FS}	V _{DS} =15V, I _D =2A	1.4			S
Diode forward voltage (note 3)	V _{SD}	I _S =3A, V _{GS} = 0V			1.2	V
DYNAMIC CHARACTERISTICS (note 4)						
Input Capacitance	C _{iss}	V _{DS} =30V, V _{GS} =0V, f =1MHz		247		pF
Output Capacitance	C _{oss}			34		pF
Reverse Transfer Capacitance	C _{rss}			19.5		pF
SWITCHING CHARACTERISTICS (note 4)						
Turn-on delay time	t _{d(on)}	V _{GS} =10V, V _{DD} =30V, I _D =1.5A, R _{GEN} =1Ω		6		ns
Turn-on rise time	t _r			15		ns
Turn-off delay time	t _{d(off)}			15		ns
Turn-off fall time	t _f			10		ns
Total Gate Charge	Q _g	V _{DS} =30V, V _{GS} =4.5V, I _D =3A		6		nC
Gate-Source Charge	Q _{gs}			1		nC
Gate-Drain Charge	Q _{gd}			1.3		nC

Notes :

1. Repetitive rating : Pulse width limited by junction temperature.
2. Surface mounted on FR4 board , t≤10s.
3. Pulse Test : Pulse Width≤300μs, Duty Cycle≤0.5%.
4. Guaranteed by design, not subject to producing.









WILLAS



SOT-23 Plastic-Encapsulate MOSFETS

SE2310

Typical Characteristics

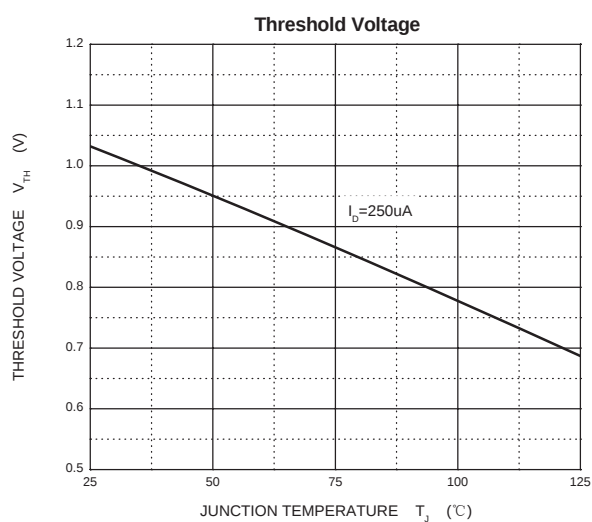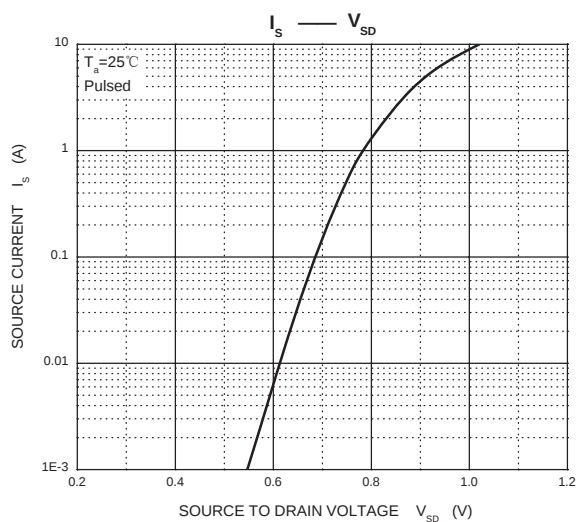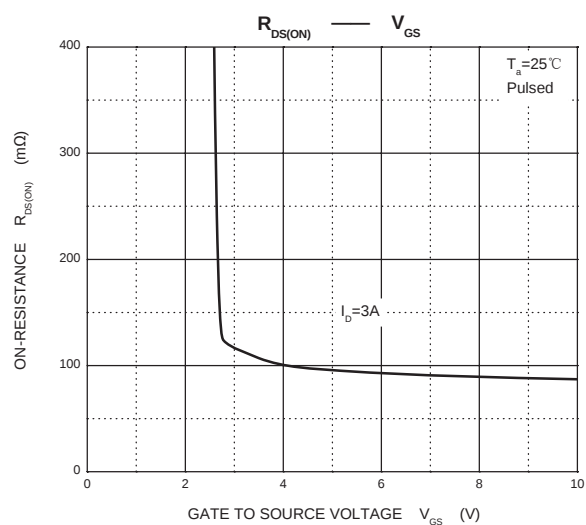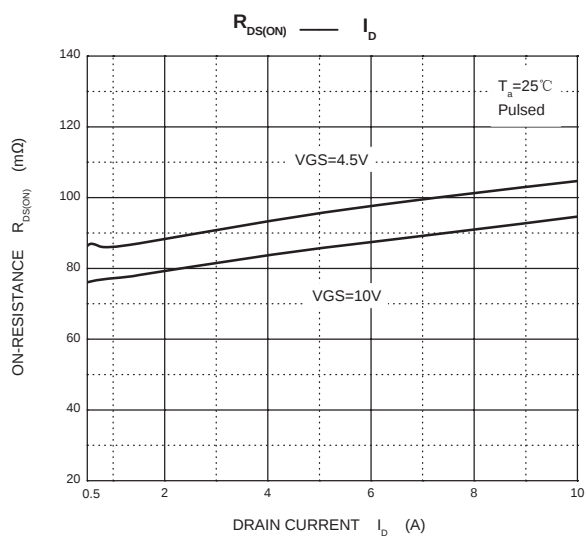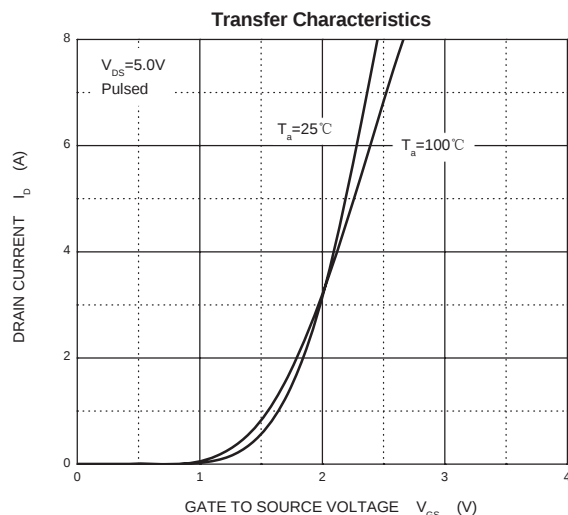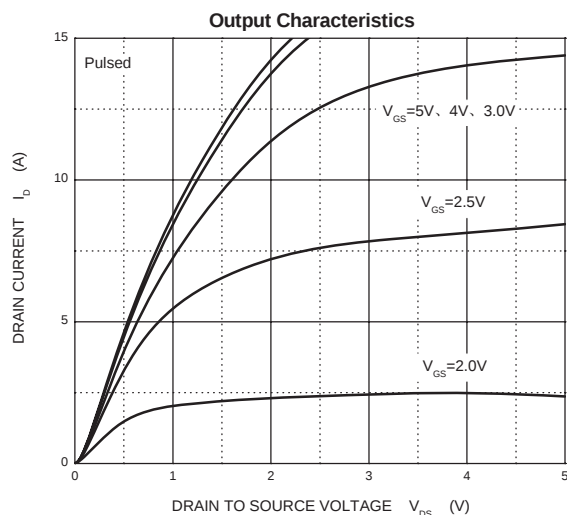

Ordering Information:

Device PN	Packing
Part Number-T ⁽¹⁾ G ⁽²⁾ -WS	Tape & Reel Packing :3000pcs/Reel

Note: 1. Packing code, T: Tape & 7" Reel Pakcing
 2. RoHS product for packing code suffix "G", Halogen free product for packing code suffix "H" .

Disclaimer

WILLAS reserves the right to make changes without notice to any product specification herein, to make corrections, modifications, enhancements or other changes. WILLAS or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies. Data sheet specifications and its information contained are intended to provide a product description only. "Typical" parameters which may be included on WILLAS data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. WILLAS does not assume any liability arising out of the application or use of any product or circuit.

WILLAS products are not designed, intended or authorized for use in medical, life-saving implant or other applications intended for life-sustaining or other related applications where a failure or malfunction of component or circuitry may directly or indirectly cause injury or threaten a life without expressed written approval of WILLAS. Customers using or selling WILLAS components for use in such applications do so at their own risk and shall agree to fully indemnify WILLAS Inc and its subsidiaries harmless against all claims, damages and expenditures.