




TYPICAL PERFORMANCE

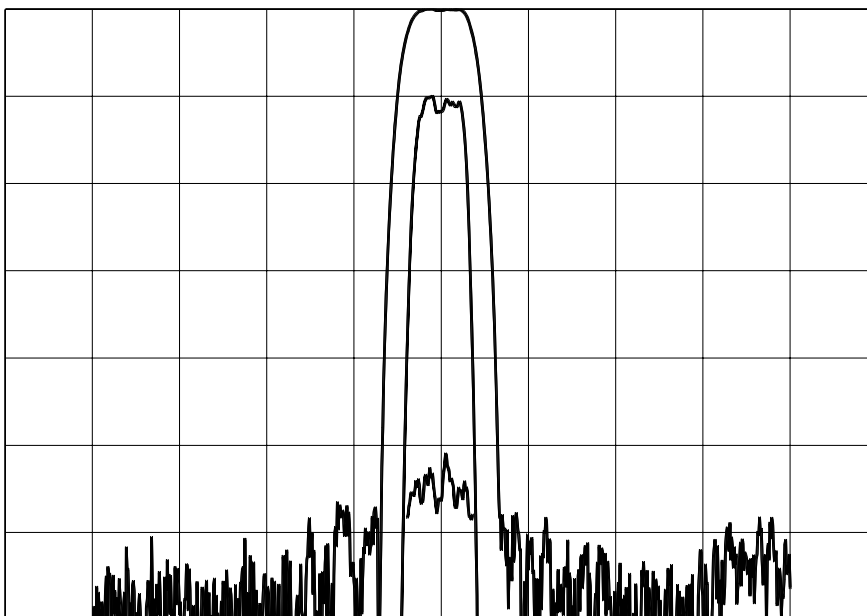

Horizontal: 2.0 MHz/div

Vertical (from top):

Magnitude

10 dB/div

Magnitude

1 dB/div

Group Delay

100 ns./div




SPECIFICATION

Parameter	Min.	Typ.	Max.	Units.
Center Frequency (Fc) ¹	139.9	140.0	140.1	MHz
Insertion Loss at Fc		23.5	25	dB
1 dB Bandwidth	1.2	1.27		MHz
3 dB Bandwidth	1.5	1.53		MHz
40 dB Bandwidth		2.55	2.7	MHz
Passband Ripple		0.25	0.4	dB p-p
Phase Ripple		2.0	3	deg p-p
Group Delay Ripple		50	150	ns p-p
Absolute Delay		3.17		us
Ultimate Rejection	50	55		dB
Substrate Material	Quartz			
Source and Load Impedance	50			Ω
Ambient Temperature		25		° C

Notes:

1: Mean value of the 3 dB band edges.

PACKAGE OUTLINE

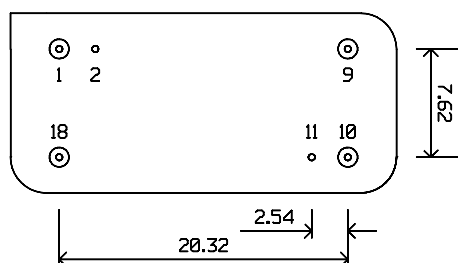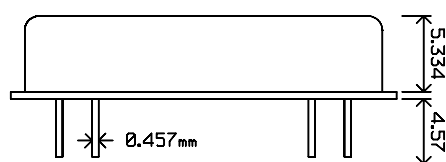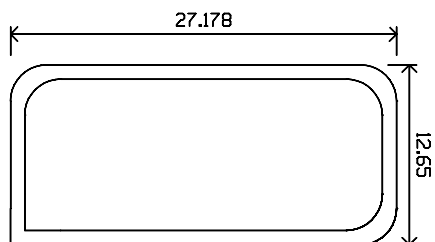


Units: mm

Pin Configuration:

Input: 18
Input Return: 1
Output: 10
Output Return: 9
Ground: 2,11

MATCHING CIRCUIT

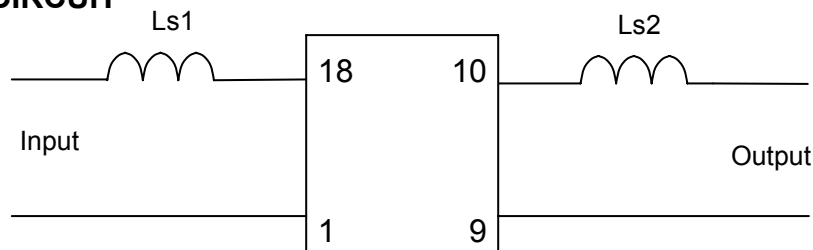

Component values:

Ls1 = 33 nH

Ls2 = 18 nH

(Minimum Q = 45)

Notes

1. Recommend use of 2% tolerance components.
2. Optimum values depend on board layout. Values intended as guide only.

ISO 9001
Registered

Micro Networks

Worldwide Headquarters: 324 Clark Street Worcester, MA 01606. tel: 508-852-5400 fax: 508-852-8456
European Sales Headquarters: Hertosingel 20 6214 AD Maastricht, Netherlands. tel: +31-43-32-70912 fax: +31-43-32-70715
www.micronetworks.com