




SF101H THRU SF105H

SURFACE MOUNT SUPER FAST RECOVERY RECTIFIER

Reverse Voltage - 50 to 600 Volts Forward Current - 1.0 Ampere

SOD-123FH



Dimensions in inches and (millimeters)

FEATURES

- ◆ Fast switching speed
- ◆ Surface mount package ideally suited for automatic insertion
- ◆ Low power loss, high efficiency
- ◆ Pb free product : 99% Sn above can meet RoHS environment substance directive request
- ◆ In compliance with EU RoHS 2002/95/EC directives

MECHANICAL DATA

Case: JEDEC SOD-123FH, Molded plastic

Terminals: Solderable per MIL-STD-750 Method 2026

Approx. Weight: 0.0006 ounce, 0.0172 gram

Standard Packaging : 8mm tape(EIA-481)

Polarity: Color band denotes cathode end

Mounting Position: Any

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

PARAMETER	SYMBOLS	SF101H	SF102H	SF103H	SF104H	SF105H	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	Volts
Maximum RMS voltage	V_{RMS}	35	70	140	420	560	Volts
Minimum Reverse Breakdown Voltage	V_R	50	100	200	400	600	Volts
Average Rectified current at $T_L = 55^\circ\text{C}$	$I_{(AV)}$	1.0					Amp
Non-repetitive Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	30					Amps
Maximum Forward Voltage at $I_F = 1.0A$	V_F	0.95			1.25	1.85	Volts
Reverse Leakage Current at V_{RRM}	I_R	5					μA
Maximum reverse recovery time (NOTE 1)	t_{rr}	35					nS
Typical Junction Capacitance (NOTE 2)	C_J	17					pF
Typical Thermal Resistance (NOTE 3)	$R_{\theta JA}$	180					$^\circ\text{C/W}$
Operating Junction Temperature Range	T_J	150					$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 ~ +150					$^\circ\text{C}$

- Note:** 1. Reverse recovery condition $I_F = 0.5A, I_R = 1.0A, I_{rr} = 0.25A$
2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
3. Mounted with minimum recommended padsize, PCB Board FR4.



SF101H THRU SF105H

RATINGS AND CHARACTERISTIC CURVES

FIG. 1- FORWARD CURRENT DERATING CURVE

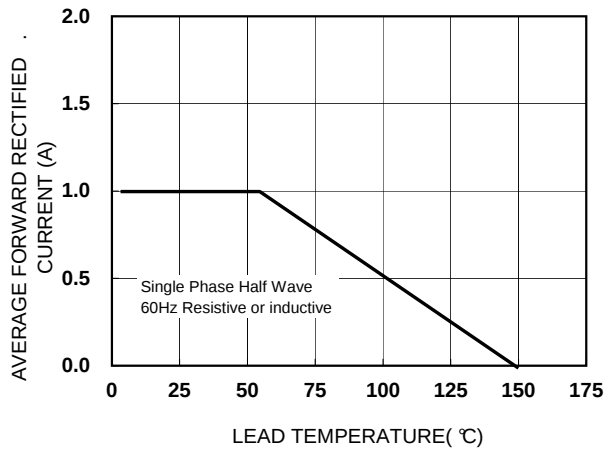


FIG. 2--MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

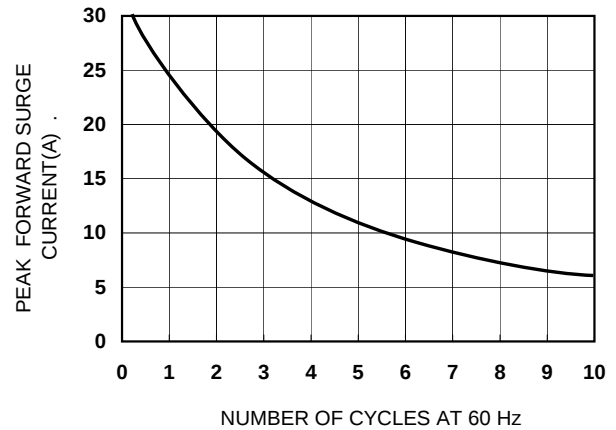


FIG. 3-TYPICAL REVERSE CHARACTERISTICS

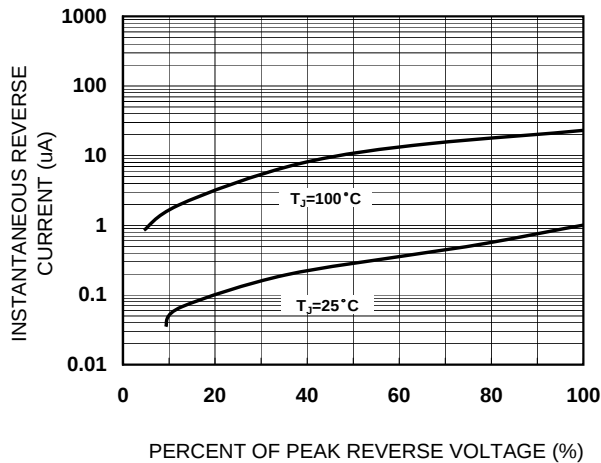


FIG. 4-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

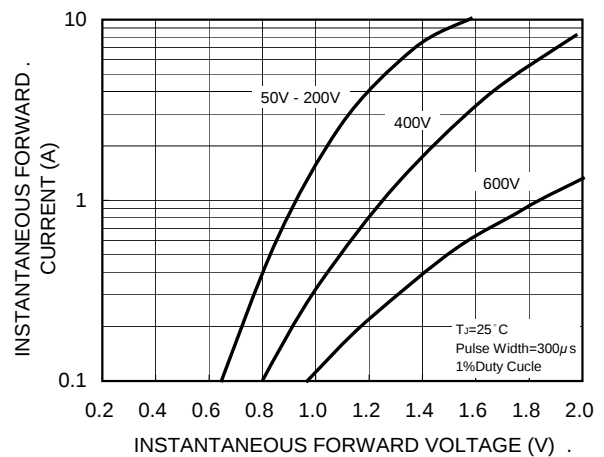


FIG. 5-TYPICAL JUNCTION CAPACITANCE

