

2. FLAT PACKAGE THYRISTOR STACK

www.DataSheet4U.com

SINGLE PHASE, 3 PHASE




SF400L4B1, SF400U4B1, SF400L6A1, SF400U6A1

Circuit		Line Voltage		DC Output Current (Free Convection)
		220 V	440 V	
Single phase		S F100L4B1	S F100U4B1	86 A
		S F250L4B1	S F250U4B1	104 A
		S F400L4B1	S F400U4B1	160 A
3 phase		S F100L6A1	S F100U6A1	125 A
		S F250L6A1	S F250U6A1	156 A
		S F400L6A1	S F400U6A1	230 A

※ Contact TOSHIBA concerning the stack with a cooling fan.

OUTLINE DRAWING Unit in mm

SF 4B1

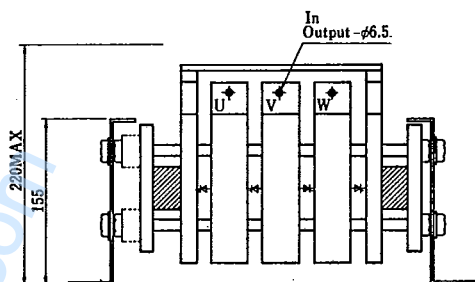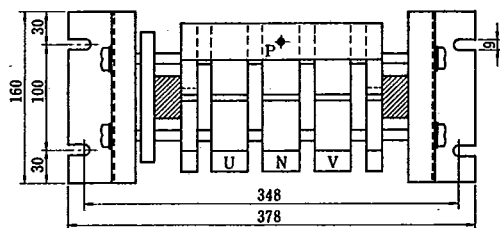

SF 6A1

