



SOLID STATE DEVICES, INC.

14830 Valley View Blvd * La Mirada, Ca 90638

Phone: (562) 404-7855 * Fax: (562) 404-1773

ssdi@ssdi-power.com * www.ssdi-power.com

DESIGNER'S DATA SHEET


FEATURES:

- **BV_{CEO} 400V.**
- **Fast Switching.**
- **High Frequency.**
- **Low Saturation Voltage.**
- **200°C Operating, Gold Eutectic Die Attach.**
- **Designed for Complementary Use with SFT6800.**

SFT1192/59

**2 AMP
500 VOLTS
PNP TRANSISTOR**

TO-59




MAXIMUM RATINGS	SYMBOL	VALUE	UNITS
Collector-Emitter Voltage $R_{BE} = 1 \text{ k}\Omega$	V_{CEO} V_{CER}	400 500	Volts
Collector-Base Voltage	V_{CBO}	500	Volts
Emitter-Base Voltage	V_{EBO}	10	Volts
Collector Current	I_C	2	Amps
Base Current	I_B	0.5	Amps
Total Device Dissipation @ $T_C = 100^\circ\text{C}$ Derate above 25°C	P_D	20 133	W mW/ $^\circ\text{C}$
Operating and Storage Temperature	T_J, T_{STG}	-65 to +200	$^\circ\text{C}$
Thermal Resistance, Junction to Case	$R_{\theta JC}$	7.5	$^\circ\text{C/W}$

CASE OUTLINE: TO-59

Pin Out:

- 1 - Collector**
2 - Base
3 - Emmitter

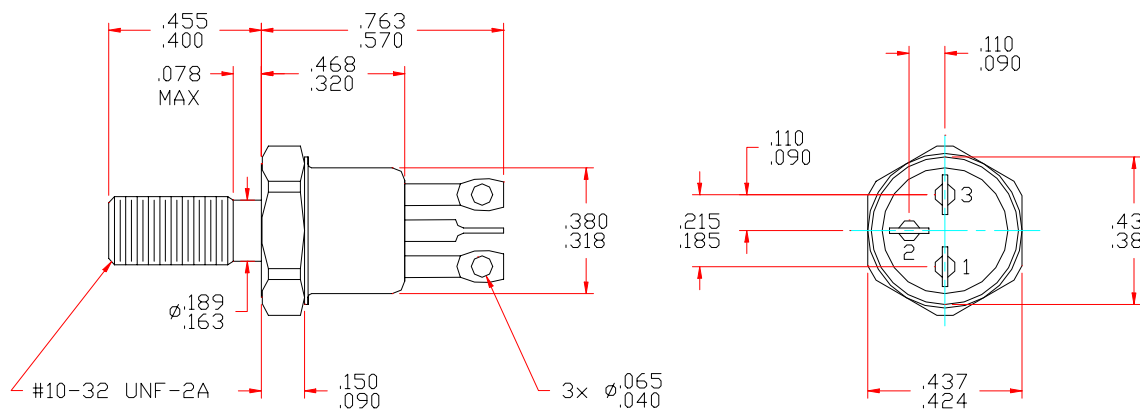

NOTE: All specifications are subject to change without notification.
SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: TR0008C

SFT1192/59



SOLID STATE DEVICES, INC.

14830 Valley View Blvd * La Mirada, Ca 90638
Phone: (562) 404-7855 * Fax: (562) 404-1773
ssdi@ssdi-power.com * www.ssdi-power.com

ELECTRICAL CHARACTERISTICS		SYMBOL	MIN	MAX	UNITS
Collector-Emitter Breakdown Voltage (I _C =5mA _{DC}) (I _C =100mA _{DC} , R _{BE} =1kΩ)		BV _{CEO} BV _{CER}	400 500	- -	V
Collector-Base Breakdown Voltage (I _C = 100uA _{DC})		BV _{CBO}	500	-	V
Emitter-Base Breakdown Voltage (I _E = 20uA _{DC})		BV _{EBO}	10	-	V
Collector Cutoff Current (V _{CB} = 450V _{DC})		I _{CBO}	-	1.0	μA
Collector Cutoff Current (V _{CE} = 400V _{DC} , V _{EB} = 1.5V _{DC})		I _{CEV}	-	10	μA
Emitter Cutoff Current (V _{EB} = 6V _{DC})		I _{EBO}	-	10	μA
DC Current Gain* (I _C = 1.0mA _{DC}) (V _{CE} =10V _{DC}) (I _C = 50mA _{DC}) (I _C = 500mA _{DC})		H _{FE}	80 60 40	- - -	
Collector-Emitter Saturation Voltage* (I _C =50mA _{DC} , I _B = 5mA _{DC}) (I _C =500mA _{DC} , I _B =50mA _{DC})		V _{CE(SAT)}	- -	0.4 2.0	V _{DC}
Base-Emitter Saturation Voltage* (I _C =50mA _{DC} , I _B = 5mA _{DC}) (I _C =500mA _{DC} , I _B =50mA _{DC})		V _{BE (SAT)}	- -	1.5 2.0	V _{DC}
Current Gain Bandwidth Product (I _C = 70mA _{DC} , V _{CE} = 30V _{DC} , f = 20MHz)		f _T	50	-	MHz
Output Capacitance (V _{CB} = 20V _{DC} , I _E = 0A _{DC} , f = 1.0MHz)		C _{ob}	-	75	pf
Input Capacitance (V _{BE} = 2V _{DC} , I _C = 0A _{DC} , f = 1.0MHz)		C _{ib}	-	300	pf
Turn On Time	(V _{CC} = 100V _{DC} , I _C = 500mA _{DC} , V _{EB(OFF)} =3.7V _{DC} , I _{B1} =I _{B2} = 50mA _{DC})	t _(on)	-	250	ns
Turn Off Time		t _(off)	-	2500	ns

*Pulse Test: Pulse Width = 300 μs , Duty Cycle = 2%