

Photointerrupters(Reflective)

KODENSHI

SG - 113

The SG - 113 reflective sensor for paper sensing combine high - output GaAs IRED with high sensitivity phototransistor. It is most applicable to paper sensor.

FEATURES


- Long focal distance type
- Adopted the three pins connector

APPLICATIONS

- Copiers
- Printers
- Facsimiles

DIMENSIONS

(Unit : mm)

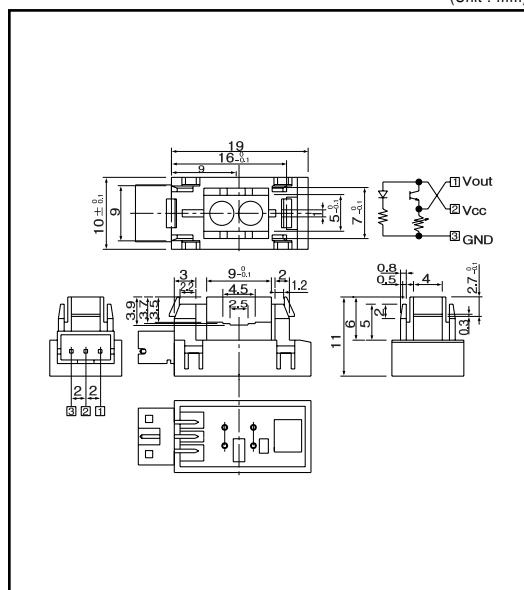

MAXIMUM RATINGS

(Ta=25 °C)

Item	Symbol	Rating	Unit
Supply voltage	V _{CC}	7	V
Output consumption	I _O	1	mA
Operating temp.	T _{opr.}	- 10 + 70	
Storage temp.	T _{stg.}	- 20 + 80	

ELECTRO-OPTICAL CHARACTERISTICS


(Ta=25 °C)

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit.
Supply voltage	V _{CC}		4.5	5.0	5.5	V
High level output voltage	V _{OH}	d=5mm	2.1	3.0	3.9	V
Low level output voltage	V _{OL}	d=5mm		0.6	0.8	V
Frequency	f				170	Hz
Current consumption	I _{CC}	d=5mm		1.8	35	mA


Photo interrupters(Reflective)

SG - 113


**Relative output voltage Vs.
Ambient temperature**

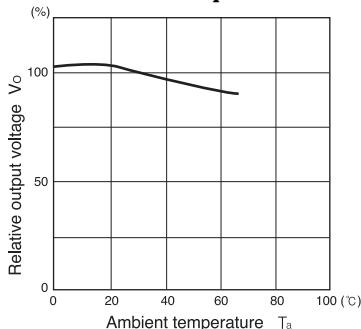


**Relative output voltage Vs.
Distance between device and reflector**

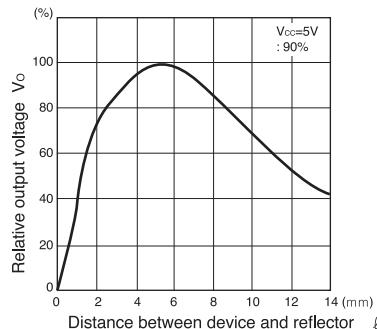


**Relative output voltage Vs.
Moving distance**

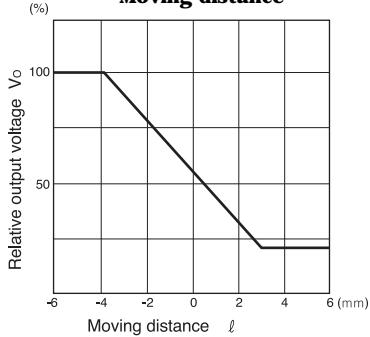

**Relative output voltage Vs.
Moving distance**

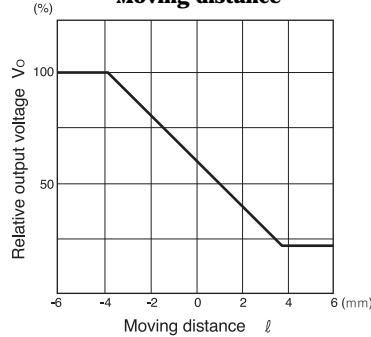

Method of measuring position detec characteristic (X)



Method of measuring position detec characteristic (Y)

