

# Photointerrupters(Reflective)

KODENSHI

## SG - 2BC

The SG - 2BC reflective sensor combines a GaAs IRED with a high - sensitivity phototransistor in a super - mini (4 ) ceramic package, reducing installation space.

### FEATURES


- Compact ( ø4mm)
- High performance
- High - speed response
- Easy to mount on P.C.B.
- Widely applicable

### APPLICATIONS

- Timing sensors
- Edge sensors
- Micro floppy disk drives
- Level sensors of liquid

### DIMENSIONS

(Unit : mm)

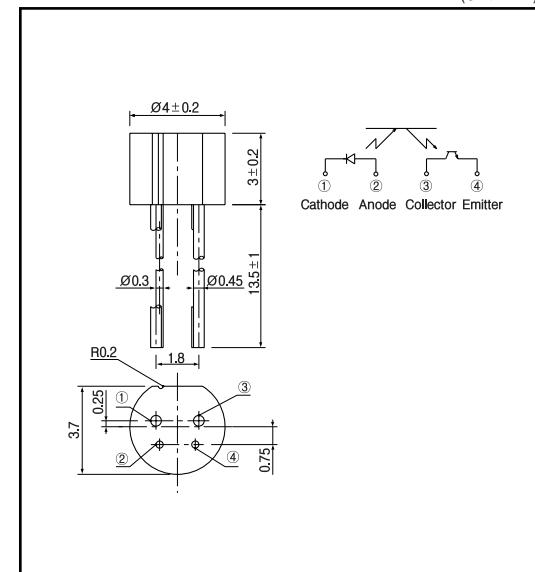

### MAXIMUM RATINGS

(Ta=25 °C)

	Item	Symbol	Rating	Unit
Input	Power dissipation	P <sub>D</sub>	75	mW
	Reverse voltage	V <sub>R</sub>	5	V
	Forward current	I <sub>F</sub>	50	mA
	Pulse forward current <sup>**</sup>	I <sub>FP</sub>	1	A
Output	Collector power dissipation	P <sub>C</sub>	75	mW
	Collector current	I <sub>C</sub>	20	mA
	C - E voltage	V <sub>CEO</sub>	30	V
	E - C voltage	V <sub>ECO</sub>	3	V
Operating temp.		To pr.	- 20 + 90	
Storage temp.		T stg.	- 30 + 100	
Soldering temp.		T sol.	260	

\*1. t w 100  $\mu$ sec. period : T = 10 msec.

\*2. For MAX. 5 seconds at the position of 2mm from the package

### ELECTRO-OPTICAL CHARACTERISTICS


(Ta=25 °C)

	Item	Symbol	Conditions	Min.	Typ.	Max.	Unit.
Input	Forward voltage	V <sub>F</sub>	I = 4mA			1.2	V
	Reverse current	I <sub>R</sub>	V <sub>R</sub> =5V			10	$\mu$ A
	Capacitance	C <sub>t</sub>	V=0V, f=1KHz		25		pF
	Peak wavelength	$\lambda$			940		nm
Output	Collector dark current	I <sub>CEO</sub>	V <sub>CE</sub> =10V			0.1	$\mu$ A
	Ligh current	I <sub>L</sub>	V <sub>CE</sub> =2V, I=4mA		100		$\mu$ A
	Leakage current	I <sub>CEOD</sub>	V <sub>CE</sub> =2V, I=4mA			0.1	$\mu$ A
Switching speeds	Rise time	t <sub>r</sub>	V <sub>CC</sub> =2V, I=100 $\mu$ A, R=1k		30		$\mu$ sec.
	Fall time	t <sub>f</sub>			30		$\mu$ sec.


## Photo interrupters(Reflective)

SG - 2BC


**Collector power dissipation Vs.  
Ambient temperature**

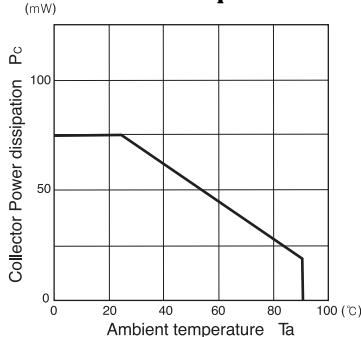


**Forward current Vs.  
Forward voltage**

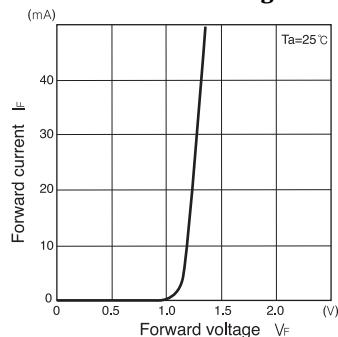


**Light current Vs.  
Forward current**

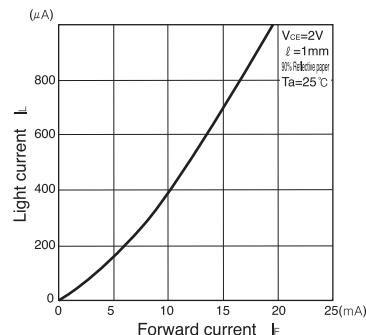


**Light current Vs.  
Collector-Emitter voltage**

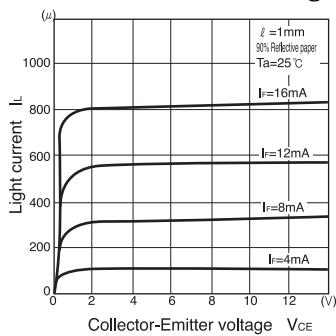


**Relative light current Vs.  
Ambient temperature**

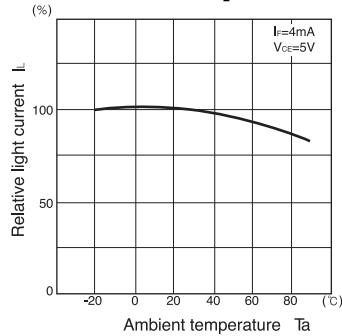


**Dark current Vs.  
Ambient temperature**

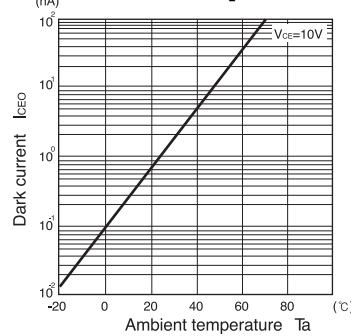


**Switching time Vs.  
Load resistance**

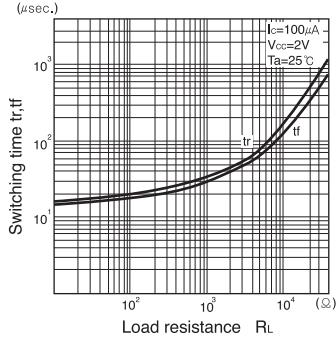

**Relative light current Vs.  
Moving distance**

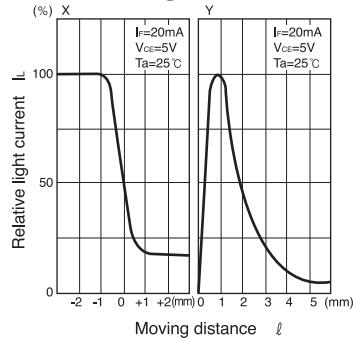

Switching time measurement circuit

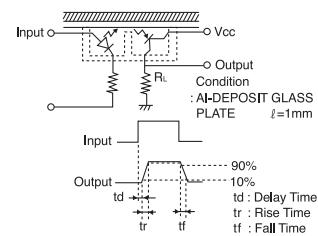

Method of measuring position characteristic

