

[< Home](#)
[< Family](#)

SG301

Ground plane omni antenna, 0 dBd gain, 395-512 MHz


- Covers a 20 MHz bandwidth without adjustment
- Versatile antenna
- Rugged construction and light weight

The SG301 is a versatile antenna ideal for use where broadband, unity gain, omni-directional coverage is needed. It covers a 20 MHz bandwidth without adjustment.

Rugged construction, light weight and ease of installation make it an ideal choice for RCC leased or rented system use.

Application Notes

- For use in broadband applications such as transportation, agriculture, forestry and mining. Unity gain with omnidirectional coverage provides increased flexibility.

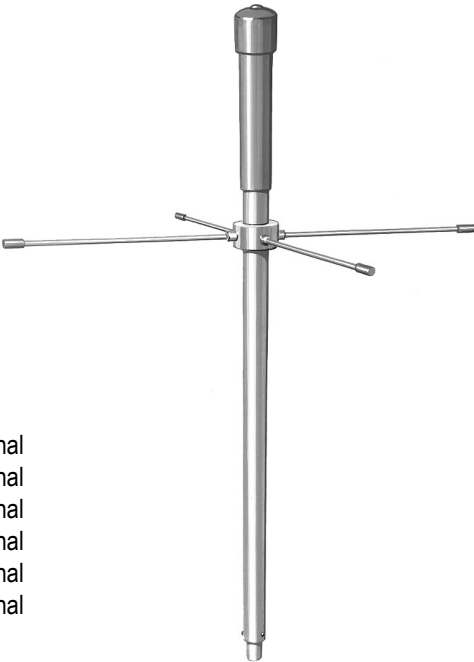

Model	Description	Pattern
SG301-SF1SNM	0 dBd gain, N (male) connector, 406-420 MHz	Omni-directional
SG301-SF2SNM	0 dBd gain, N (male) connector, 450-470 MHz	Omni-directional
SG301-SF3SNF	0 dBd gain, N (female) connector, 430-450 MHz	Omni-directional
SG301-SF4SNM	0 dBd gain, N (male) connector, 470-490 MHz	Omni-directional
SG301-SF5SNM	0 dBd gain, N (male) connector, 490-512 MHz	Omni-directional
SG301-SF6SNF	0 dBd gain, N (female) connector, 395-410 MHz	Omni-directional

www.sinctech.com



ROJONE
PTY. LTD.

Australian Representatives
ROJONE, PTY LTD.
Tel: 02 9829 1555
E: sales@rojone.com.au
www.rojone.com.au

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1223 42 03 03	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com
Product Specification Sheet		SG301		Dated: 05-02-10

SG301-SF1SNM

SG301-SF2SNM

SG301-SF3SNF

SG301-SF4SNM

Electrical Specifications

Frequency Range, MHz	406 to 420	450 to 470	430 to 450	470 to 490
Gain (nominal), dBd (dBi)	unity (2.1)	unity (2.1)	unity (2.1)	unity (2.1)
Input VSWR (max)	1.5:1	1.5:1	1.5:1	1.5:1
Polarization	vertical	vertical	vertical	vertical
Pattern	Omni-directional	Omni-directional	Omni-directional	Omni-directional
Vertical beamwidth, degrees	87	87	87	87
Average Power Input (max), W	100	100	100	100
Lightning protection	DC ground	DC ground	DC ground	DC ground
Bandwidth, MHz	14	20	20	20

Mechanical Specifications

Connector	N (male)	N (male)	N (female)	N (male)
Length/ Height, in (mm)	23 (584)	23 (584)	23 (584)	23 (584)
Width, in (mm)	16 (406)	16 (406)	16 (406)	16 (406)
Depth, in (mm)	16 (406)	16 (406)	16 (406)	16 (406)
Base pipe diameter, in (mm)	0.8 (19)	0.8 (19)	0.8 (19)	0.8 (19)
Base pipe mounting length, in (mm)	8 (203)	8 (203)	8 (203)	8 (203)
Weight, lbs (kg)	2 (0.9)	2 (0.9)	2 (0.9)	2 (0.9)
Actual Shipping weight, lbs (kg)	5 (2.3)	5 (2.3)	5 (2.3)	5 (2.3)
Shipping dimensions, in (mm)	26x4x6 (660x102x152)	26x4x6 (660x102x152)	26x4x6 (660x102x152)	26x4x6 (660x102x152)
Mounting hardware	#135 clamp	#135 clamp	#135 clamp	#135 clamp

Environmental Specifications

Temperature range, °F (°C)	-22 to +140 (-30 to +60)	-22 to +140 (-30 to +60)	-22 to +140 (-30 to +60)	-22 to +140 (-30 to +60)
Wind Loading Area (Flat Plate Equivalent), ft² (m²)	0.09 (0.01)	0.09 (0.01)	0.09 (0.01)	0.09 (0.01)
Wind Loading Area (ice), ft² (m²)	0.33 (0.03)	0.33 (0.03)	0.33 (0.03)	0.33 (0.03)
Lateral thrust (100mph), lbs (N)	3.4 (15.3)	3.4 (15.3)	3.4 (15.3)	3.4 (15.3)
Bending moment, ft-lbs (Nm)	0.5 (0.7)	0.5 (0.7)	0.5 (0.7)	0.5 (0.7)

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1223 42 03 03	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com
Product Specification Sheet		SG301		Dated: 05-02-10

SG301-SF5SNM

SG301-SF6SNF

Electrical Specifications

Frequency Range, MHz	490 to 512	395 to 410
Gain (nominal), dBd (dBi)	unity (2.1)	unity (2.1)
Input VSWR (max)	1.5:1	1.5:1
Polarization	vertical	vertical
Pattern	Omni-directional	Omni-directional
Vertical beamwidth, degrees	87	87
Average Power Input (max), W	100	100
Lightning protection	DC ground	DC ground
Bandwidth, MHz	22	15


Mechanical Specifications

Connector	N (male)	N (female)
Length/ Height, in (mm)	23 (584)	23 (584)
Width, in (mm)	16 (406)	16 (406)
Depth, in (mm)	16 (406)	16 (406)
Base pipe diameter, in (mm)	0.8 (19)	0.8 (19)
Base pipe mounting length, in (mm)	8 (203)	8 (203)
Weight, lbs (kg)	2 (0.9)	2 (0.9)
Actual Shipping weight, lbs (kg)	5 (2.3)	5 (2.3)
Shipping dimensions, in (mm)	26x4x6 (660x102x152)	26x4x6 (660x102x152)
Mounting hardware	#135 clamp	#135 clamp

Environmental Specifications

Temperature range, °F (°C)	-22 to +140 (-30 to +60)	-22 to +140 (-30 to +60)
Wind Loading Area (Flat Plate Equivalent), ft² (m²)	0.09 (0.01)	0.09 (0.01)
Wind Loading Area (ice), ft² (m²)	0.33 (0.03)	0.33 (0.03)
Lateral thrust (100mph), lbs (N)	3.4 (15.3)	3.4 (15.3)
Bending moment, ft-lbs (Nm)	0.5 (0.7)	0.5 (0.7)

SINCLAIR TECHNOLOGIES



MEASURED RADIATION PATTERN
VERTICAL POLARIZATION

Elevation
Relative Gain - 10 dB per Division

SG301-SF1SNM

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1223 42 03 03	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com
Product Specification Sheet		SG301		Dated: 05-02-10