

TECHNICAL DATA
DATA SHEET 4174, REV. -

HERMETIC ULTRA LOW DROPOUT LINEAR REGULATOR

DESCRIPTION/FEATURES:

7.0A, ULTRA LOW DROPOUT, ADJUSTABLE POSITIVE LINEAR REGULATOR IN HERMETIC MO-078 PACKAGE

- DROPOUT VOLTAGE: 540mV at 7A
- FAST TRANSIENT RESPONSE
- REMOTE SENSE
- 1mV TYPICAL LOAD REGULATION
- NO SUPPLY SEQUENCING PROBLEMS IN DUAL SUPPLY MODE

MAXIMUM RATINGS

ALL RATINGS ARE @ $T_C = 25^\circ\text{C}$ UNLESS OTHERWISE SPECIFIED.

RATING	SYMBOL	MAX.	UNITS
OUTPUT CURRENT	I_O	7	Amps
POWER INPUT VOLTAGE	V_{PWR}	6	Volts
CONTROL INPUT VOLTAGE	V_{CTRL}	13	Volts
POWER DISSIPATION $T_C = 25^\circ\text{C}$	P_D	20	W
THERMAL RESISTANCE, JUNCTION TO CASE	$R_{\theta JC}$	5.0	$^\circ\text{C/W}$
OPERATING JUNCTION TEMPERATURE RANGE	T_J	-55 to +125	$^\circ\text{C}$
STORAGE TEMPERATURE RANGE	T_{stg}	-65 to +150	$^\circ\text{C}$
LEAD TEMPERATURE SOLDERING (10 SEC MAX.)	T_L	300	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ^{1,2}

PARAMETER	CONDITIONS	MIN.	TYP	MAX.	UNITS
Reference Voltage	$V_{CTRL} = 2.75\text{V}, V_{PWR} = 2\text{V}, I_{LOAD} = 10\text{mA}$	1.243	1.250	1.257	Volts
	$V_{CTRL} = 2.7 \text{ to } 12\text{V}, V_{PWR} = 1.75 \text{ to } 5.5\text{V}, I_{LOAD} = 10\text{mA to } 7\text{A}^3$	1.232	1.250	1.263	Volts
Current Limit	$V_{CTRL} = 2.75\text{V}, V_{PWR} = 2.05\text{V}, \Delta V_{OUT} = 100\text{mV}$	7.1	8		A
Line Regulation	$V_{CTRL} = 2.7 \text{ to } 12\text{V}, V_{PWR} = 1.75 \text{ to } 5.5\text{V}, I_{LOAD} = 10\text{mA}^3$	-	1	3	mV
Load Regulation	$V_{CTRL} = 2.75\text{V}, V_{PWR} = 2.1\text{V}, I_{LOAD} = 10\text{mA to } 7\text{A}^3$	-	1	5	mV
Minimum Load Current ⁴	$V_{CTRL} = 5\text{V}, V_{PWR} = 3.3\text{V}^3$	-	5	10	mA
Adjust Pin Current	$V_{CTRL} = 2.75\text{V}, V_{PWR} = 2.05\text{V}, I_{LOAD} = 10\text{mA}$	-	50	120	μA
Control Pin Current ⁶	$V_{CTRL} = 2.75\text{V}, V_{PWR} = 2.05\text{V}, I_{LOAD} = 100\text{mA}$	-	6	10	mA
	$V_{CTRL} = 2.75\text{V}, V_{PWR} = 2.05\text{V}, I_{LOAD} = 4\text{A}$	-	30	60	mA
	$V_{CTRL} = 2.75\text{V}, V_{PWR} = 2.05\text{V}, I_{LOAD} = 7\text{A}$	-	60	120	mA

TECHNICAL DATA
DATA SHEET 4174, REV. -

ELECTRICAL CHARACTERISTICS (continued) ^{1,2}

PARAMETER	CONDITIONS	MIN.	TYP	MAX.	UNITS
Ripple Rejection	$V_{CTRL} = V_{PWR} = 3.75V$ (Avg), $V_{RIPPLE} = 1V_{P-P}$, $f_{RIPPLE} = 120Hz$, $I_{LOAD} = 4A$	60	80	-	dB
Thermal Regulation	$V_{PWR} = 5V$, $I_{LOAD} = 7A$, $P_D > 20W$, 30ms Pulse	-	-	0.02	%/W
Dropout Voltage	Dropout voltage is caused by either minimum control voltage or minimum power voltage. Both parameters are specified with respect to the output voltage. The specifications represent the minimum input/output voltage required to maintain 1% regulation.				
Minimum Control Voltage $V_{CTRL} - V_{OUT}$	$V_{PWR} = 2.05V$, $I_{LOAD} = 100mA$	-	1	1.15	V
	$V_{PWR} = 2.05V$, $I_{LOAD} = 1A$	-	1	1.15	V
	$V_{PWR} = 2.05V$, $I_{LOAD} = 4A$	-	1.06	1.2	V
	$V_{PWR} = 2.05V$, $I_{LOAD} = 7A$	-	1.15	1.3	V
Minimum Power Voltage $V_{PWR} - V_{OUT}$	$V_{CTRL} = 2.75V$, $I_{LOAD} = 100mA$ ³	-	0.10	0.17	V
	$V_{CTRL} = 2.75V$, $I_{LOAD} = 1A$ ³	-	0.15	0.22	V
	$V_{CTRL} = 2.75V$, $I_{LOAD} = 4A$ ³	-	0.34	0.50	V
	$V_{CTRL} = 2.75V$, $I_{LOAD} = 7A$	-	0.70	0.80	V

¹ $T_C = 25^\circ C$ Unless Otherwise Specified


² $V_{SENSE} = V_{OUT}$, $V_{ADJ} = 0V$ Unless Otherwise Specified

³ Denotes specifications which apply over the full operating temperature range


⁴ The minimum load current is required to maintain regulation. Normally the current in the resistor divider used to set the output voltage is selected to meet the minimum load current requirement

⁵ The control pin current is the drive current required for the output transistor. It is roughly 1% of the output current. The minimum value is equal to the quiescent current.

Typical Reference Voltage vs Temperature


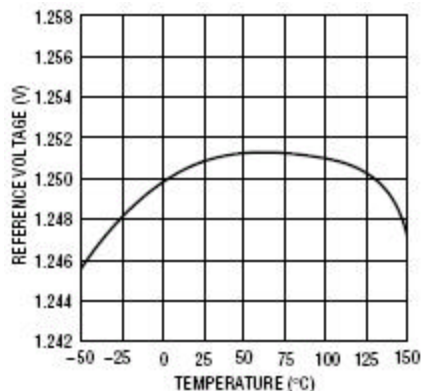


Typical Control Pin Current vs Output Current

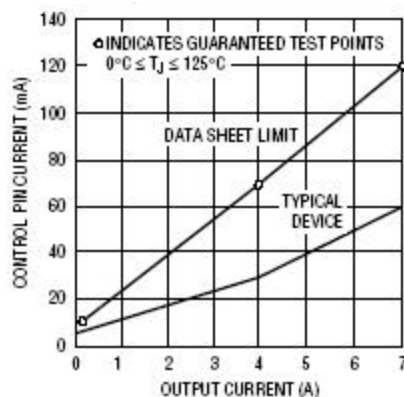

SHD501290


Typical Minimum Control Voltage vs Output Current Typical Dropout (Minimum Power) Voltage vs Output Voltage

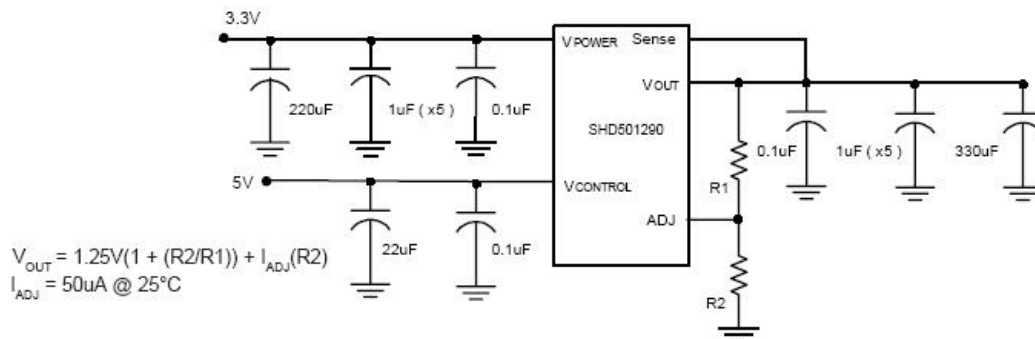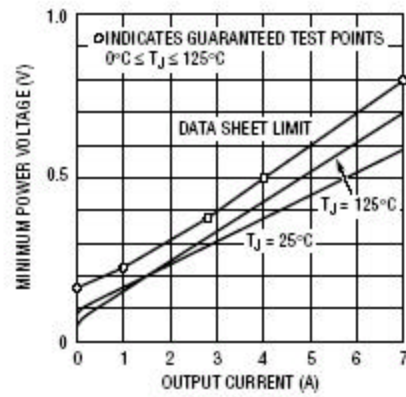

Typical Application

TECHNICAL DATA
DATA SHEET 4174, REV. -

MECHANICAL DIMENSIONS
MO-078 5 Leads

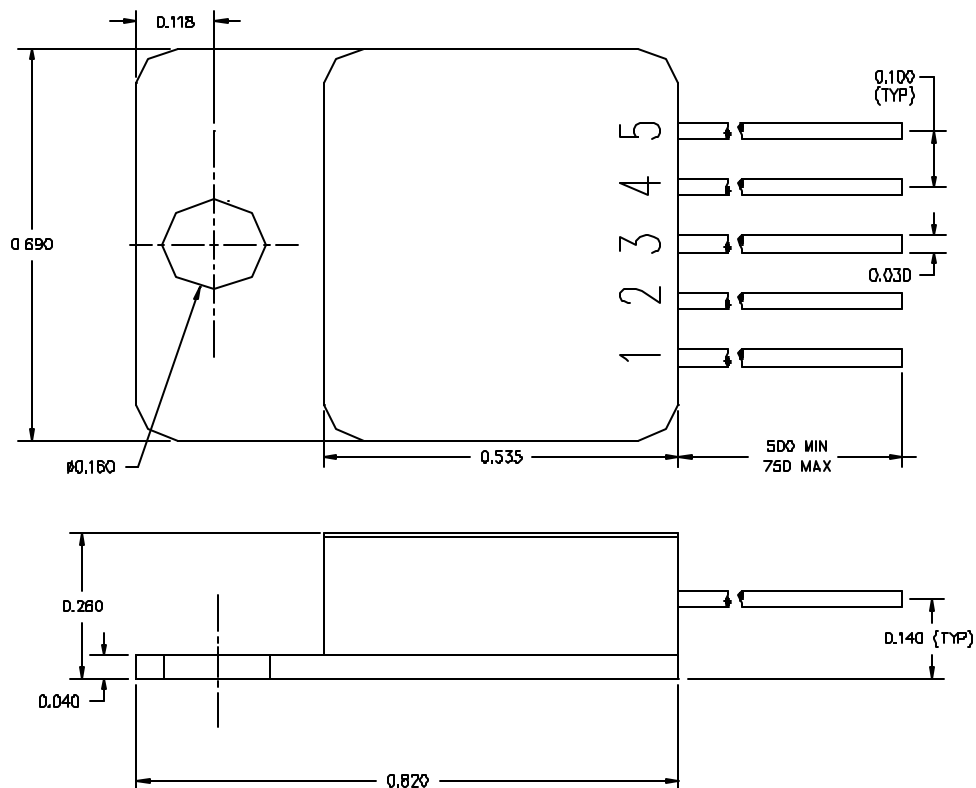

PINOUT TABLE

PIN 1	PIN 2	PIN 3	PIN 4	PIN 5
OUT	SENSE	ADJ	POWER	CONTROL

TECHNICAL DATA

DISCLAIMER:

- 1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the Sensitron Semiconductor sales department for the latest version of the datasheet(s).
- 2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.
- 3- In no event shall Sensitron Semiconductor be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). Sensitron Semiconductor assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.
- 4- In no event shall Sensitron Semiconductor be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.
- 5- No license is granted by the datasheet(s) under any patents or other rights of any third party or Sensitron Semiconductor.
- 6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of Sensitron Semiconductor.
- 7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations.