

RF Micro Devices® Offers the SiW1722™ UltimateBlue™ Radio Modem



The SiW1722™ UltimateBlue™ radio modem is a third-generation radio modem for Bluetooth® wireless communications and is based on 0.18 μm CMOS technology. The highly integrated transceiver was specifically designed to meet the rigorous RF performance required for integrating Bluetooth technology into CDMA-based mobile phone applications.


The SiW1722 radio modem combines a 2.4 GHz radio transceiver and Gaussian Frequency Shift Keying (GFSK) modem with digital control functions. The IC also incorporates analog and digital voltage regulators, a power-on-reset (POR) circuit and a reference Phase Lock Loop (PLL) to enable multiple input frequencies.

The SiW1722 radio modem uses direct conversion (zero-IF) architecture. This allows digital filtering for excellent interference rejection as compared to low IF solutions, which have lower rejection due to analog matching limitations. The receiver features high sensitivity due to a low noise RF design combined with an advanced modem design. A fast hardware AGC enables full discovery of any device within the dynamic range of the receiver, solving near-far issues. The transmitter can maintain a stable output power level up to +4 dBm for class 2 operation, which in combination with the excellent receiver performance, ensures the maximum possible range at the lowest system cost.

Features

- On-chip 50 Ohm RF match network with no external impedance matching components
- Fully compliant with Bluetooth specification 1.2
- Digital interface to CDMA chipsets with an integrated Bluetooth baseband
- Supports multiple external reference clocks or crystal frequencies with on-chip reference PLL
- Direct-conversion architecture with no external channel filter or VCO resonator components
- Highly sensitive receiver with excellent interference rejection performance
- Hardware AGC dynamically adjusts receiver performance in changing environments
- Low out-of-band spurious emissions prevents interference with mobile phone frequencies
- Class 2 and 3 transmit output power up to +4 dBm — output power control loop for accurate power control
- On-chip voltage regulation simplifies voltage input requirement
- Low power consumption in active and standby modes

SiW1722 Block Diagram

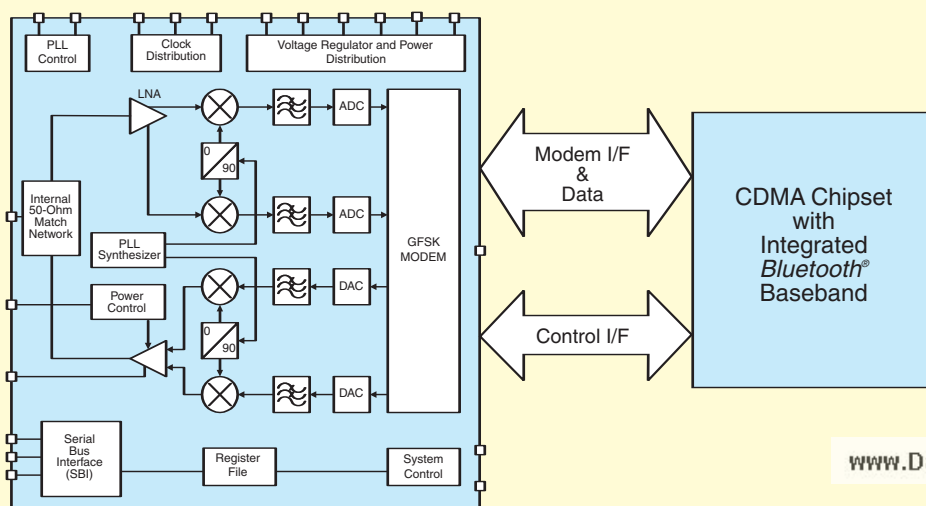

RADIO SPECIFICATIONS

Parameter	Min	Typ	Max	Units
Supply voltage to on-chip regulator	2.3	—	3.63	V
Operating temperature (industrial grade)	-40	—	+85	°C
Receiver sensitivity	—	-87	—	dBm
Output power, maximum	—	+2	+4	dBm
Maximum usable signal	0	—	—	dBm
Frequency operating range	2402	—	2480	MHz
C/I co-channel (0.1% BER)	—	+8	—	dB
C/I 1 MHz (0.1% BER)	—	-4	—	dB
C/I 2 MHz (0.1% BER)	—	-38	—	dB
C/I ≥ 3 MHz (0.1% BER)	—	-43	—	dB

For sales or technical support,
contact RFMD at **336-678-5570**
or **sales-support@rfmd.com**



Enabling Wireless Connectivity™

www.rfmd.com



Information disclosed in this document is preliminary in nature and subject to change. RF Micro Devices, Inc. and Silicon Wave, Inc. reserve the right to make changes to products without notice, and advises customers to verify that the information being relied on is current. These products are not designed, manufactured or intended for use in equipment for health care, life support, aircraft control or navigation, or any other applications that require failsafe operation. RF Micro Devices, Inc. and Silicon Wave, Inc. disclaim all liability whatsoever for their use in any such applications.



RF MICRO DEVICES®, RFMD® and Enabling Wireless Connectivity™ are trademarks of RFMD, LLC. Silicon Wave, the diamond logo design, and the SiW product name prefix are registered trademarks and UltimateBlue is a trademark of Silicon Wave, Inc. BLUETOOTH is a trademark owned by Bluetooth SIG, Inc., U.S.A. and licensed for use by RF Micro Devices, Inc. and Silicon Wave. All other trade names, trademarks and registered trademarks are the property of their respective owners. (REV. 02)

7628 Thorndike Road, Greensboro, NC 27409-9421 • Phone 336-664-1233 • Fax 336-931-7454

www.DataSheet4U.com

3.04.1500