


# SK25GD065ET

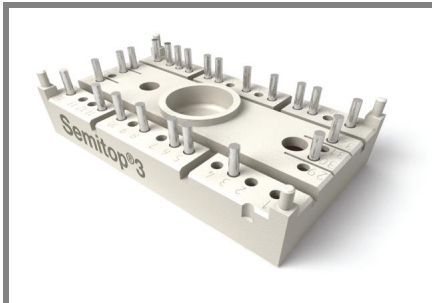

**SEMITOP<sup>®</sup> 3**

## IGBT Module

**SK25GD065ET**


Preliminary Data

### Features

- Compact design
- One screw mounting
- Heat transfer and isolation through direct copper bonded aluminium oxide ceramic (DCB)
- Ultrafast NPT technology IGBT
- CAL technology FWD
- Integrated NTC temperature sensor

### Typical Applications

- Inverter

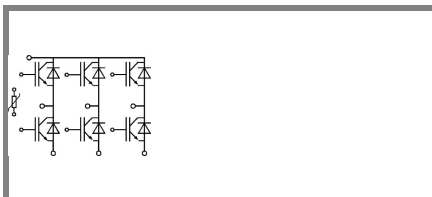


**GD-ET**

Absolute Maximum Ratings		$T_s = 25\text{ °C}$ , unless otherwise specified			
Symbol	Conditions	Values			Units
<b>IGBT</b>					
$V_{CES}$	$T_j = 25\text{ °C}$	600			V
$I_C$	$T_j = 125\text{ °C}$	$T_s = 25\text{ °C}$	30		A
		$T_s = 80\text{ °C}$	22		A
$I_{CRM}$	$I_{CRM} = 2 \times I_{Cnom}$	60			A
$V_{GES}$		$\pm 20$			V
$t_{psc}$	$V_{CC} = 300\text{ V}; V_{GE} \leq 20\text{ V}; T_j = 125\text{ °C}$ $V_{CES} < 600\text{ V}$	10			$\mu\text{s}$
<b>Inverse Diode</b>					
$I_F$	$T_j = 150\text{ °C}$	$T_s = 25\text{ °C}$	36		A
		$T_s = 80\text{ °C}$	24		A
$I_{FRM}$	$I_{FRM} = 2 \times I_{Fnom}$	70			A
<b>Module</b>					
$I_{t(RMS)}$					A
$T_{vj}$		-40 ... +150			$^{\circ}\text{C}$
$T_{stg}$		-40 ... +125			$^{\circ}\text{C}$
$V_{isol}$	AC, 1 min.	2500			V

Characteristics		$T_s = 25\text{ °C}$ , unless otherwise specified			
Symbol	Conditions	min.	typ.	max.	Units
<b>IGBT</b>					
$V_{GE(th)}$	$V_{GE} = V_{CE}, I_C = 0,7\text{ mA}$	3	4	5	V
$I_{CES}$	$V_{GE} = 0\text{ V}, V_{CE} = V_{CES}$	$T_j = 25\text{ °C}$	0,1		mA
		$T_j = 125\text{ °C}$			mA
$I_{GES}$	$V_{CE} = 0\text{ V}, V_{GE} = 20\text{ V}$	$T_j = 25\text{ °C}$	120		nA
		$T_j = 125\text{ °C}$			nA
$V_{CE0}$		$T_j = 25\text{ °C}$	1,2	1,3	V
		$T_j = 125\text{ °C}$	1,1	0,9	V
$r_{CE}$	$V_{GE} = 15\text{ V}$	$T_j = 25\text{ °C}$	26	40	$\text{m}\Omega$
		$T_j = 125\text{ °C}$	36,7		$\text{m}\Omega$
$V_{CE(sat)}$	$I_{Cnom} = 30\text{ A}, V_{GE} = 15\text{ V}$	$T_j = 25\text{ °C}_{chiplev.}$	2	2,5	V
		$T_j = 125\text{ °C}_{chiplev.}$	2,2		V
$C_{ies}$	$V_{CE} = 25, V_{GE} = 0\text{ V}$	$f = 1\text{ MHz}$	1,6		nF
$C_{oes}$			0,15		nF
$C_{res}$			0,092		nF
$t_{d(on)}$	$R_{Gon} = 33\ \Omega$	$V_{CC} = 300\text{ V}$ $I_{Cnom} = 25\text{ A}$	30		ns
$t_r$			25		ns
$E_{on}$	$R_{Goff} = 33\ \Omega$	$T_j = 125\text{ °C}$ $V_{GE} = \pm 15\text{ V}$	0,8		mJ
$t_{d(off)}$			250		ns
$t_f$			15		ns
$E_{off}$			0,55		mJ
$R_{th(j-s)}$	per IGBT	1,4			K/W

# SK25GD065ET

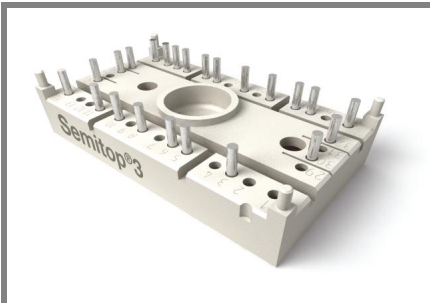

**SEMITOP® 3**

## IGBT Module

**SK25GD065ET**


Preliminary Data

### Features

- Compact design
- One screw mounting
- Heat transfer and isolation through direct copper bonded aluminium oxide ceramic (DCB)
- Ultrafast NPT technology IGBT
- CAL technology FWD
- Integrated NTC temperature sensor

### Typical Applications

- Inverter




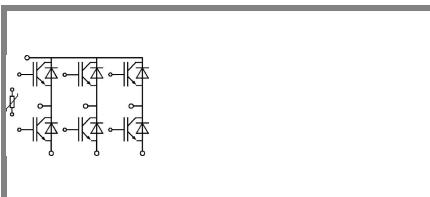





**GD-ET**

Characteristics			min.	typ.	max.	Units
<b>Symbol</b>	<b>Conditions</b>					
<b>Inverse Diode</b>						
$V_F = V_{EC}$	$I_{Fnom} = 25 \text{ A}; V_{GE} = 0 \text{ V}$	$T_j = 25 \text{ }^\circ\text{C}_{\text{chiplev.}}$		1,45	1,7	V
		$T_j = 125 \text{ }^\circ\text{C}_{\text{chiplev.}}$		1,4	1,75	V
$V_{F0}$		$T_j = 25 \text{ }^\circ\text{C}$		0,85		V
		$T_j = 125 \text{ }^\circ\text{C}$		0,9		V
$r_F$		$T_j = 25 \text{ }^\circ\text{C}$				mΩ
		$T_j = 125 \text{ }^\circ\text{C}$		22	32	mΩ
$I_{RRM}$	$I_{Fnom} = \text{A}$	$T_j = 125 \text{ }^\circ\text{C}$				A
$Q_{rr}$	$V_{CC} = 300\text{V}$					μC
$E_{rr}$						mJ
$R_{th(j-s)D}$	per diode				1,7	K/W
$M_s$	to heat sink		2,25		2,5	Nm
w				30		g
<b>Temperature sensor</b>						
$R_{100}$	$T_s = 100^\circ\text{C}$ ( $R_{25} = 5\text{k}\Omega$ )			493±5%		Ω

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.

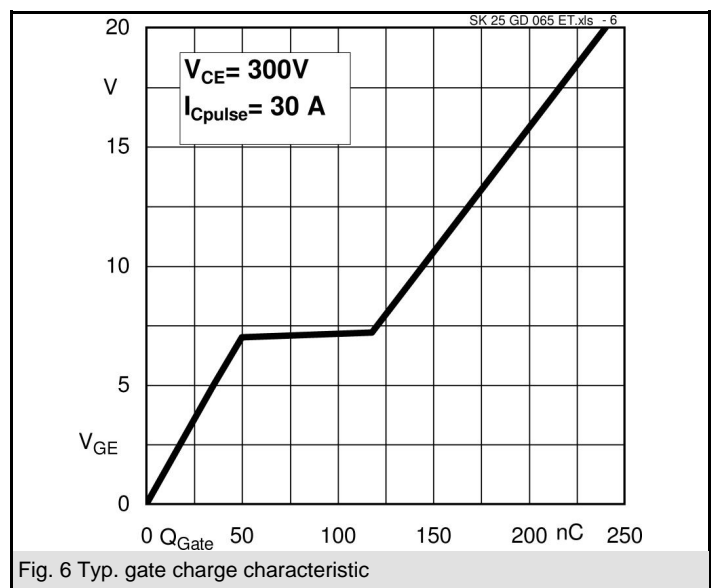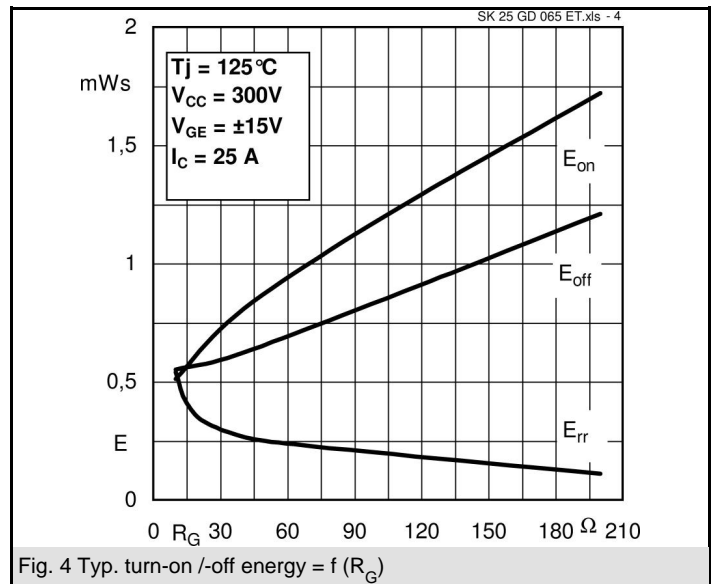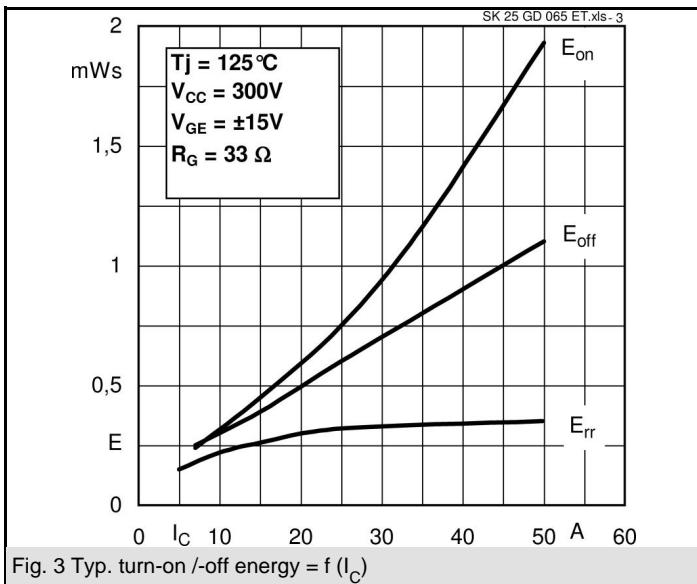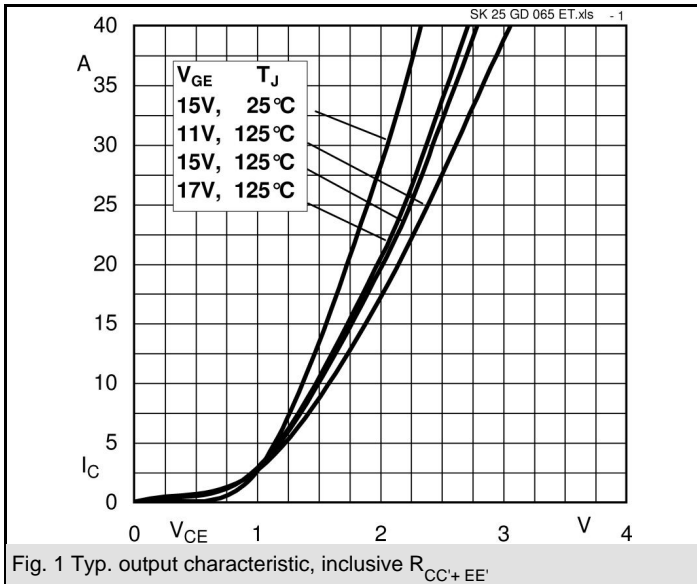


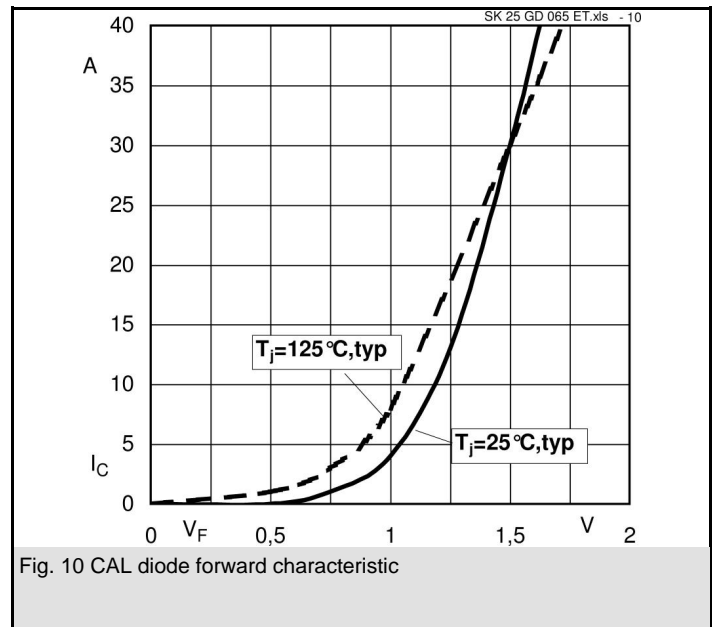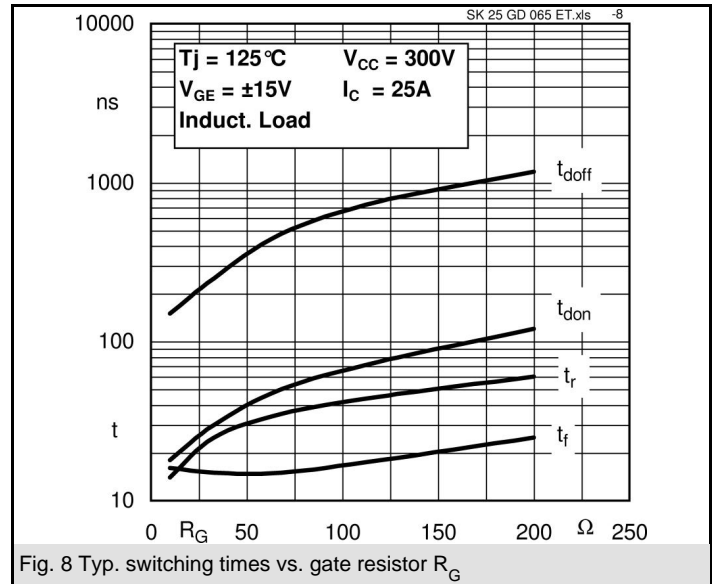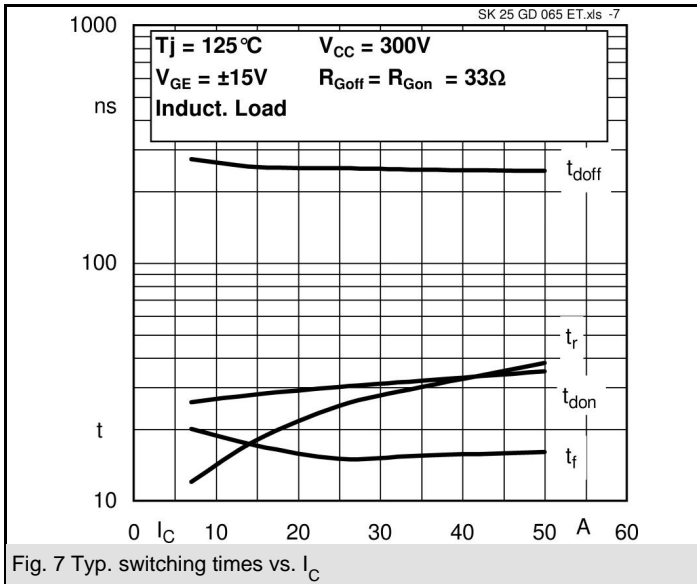

# SK25GD065ET

UL recognized file

no. E 63 532

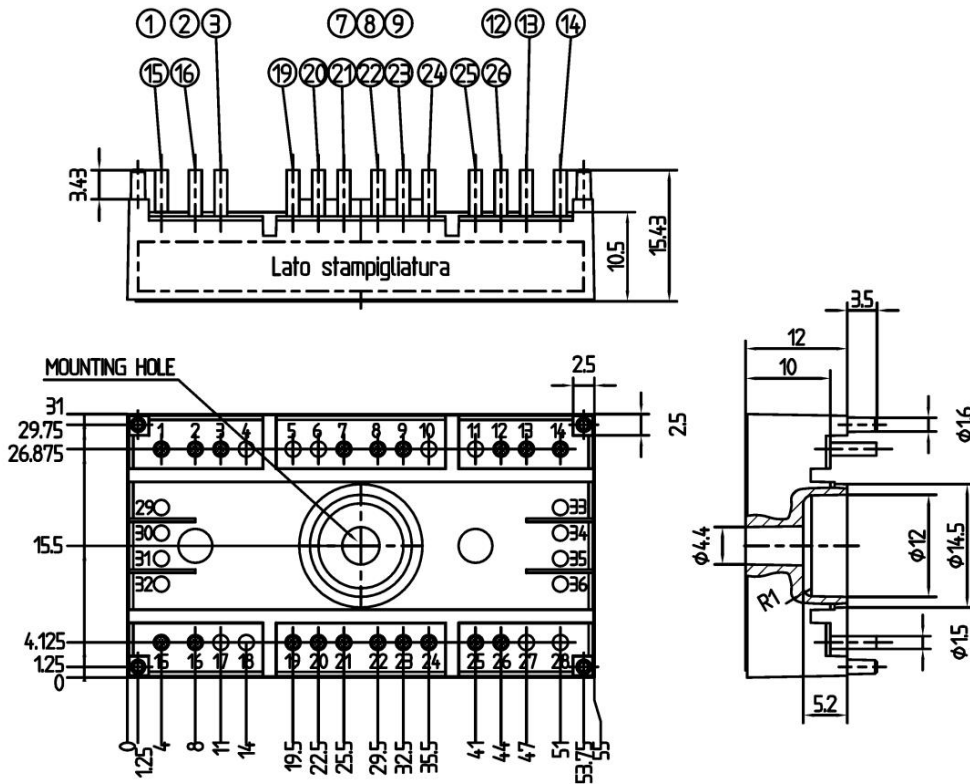

Case T52 (Suggested hole diameter, in the PCB, for solder pins and plastic mounting pins: 2mm)

