



SKL32C THRU SKL34C

LOW VF SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 20 to 40 Volts Forward Current - 3.0 Ampere

DO-214AB

FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Surface mount package ideally suited for automatic insertion
- ◆ Metal silicon junction, majority carrier conduction
- ◆ Low power loss, high efficiency, high surge capacity
- ◆ High surge capacity
- ◆ High current capacity, low VF
- ◆ For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- ◆ In compliance with EU RoHS 2002/95/EC directives

MECHANICAL DATA


Case: JEDEC DO-214AB/SMC, Molded plastic over passivated junction

Terminals: Solderable per MIL-STD-750 Method 2026

Approx. Weight: 0.007 ounce, 0.25grams

Mounting Position: Any

Polarity: Color band denotes cathode end

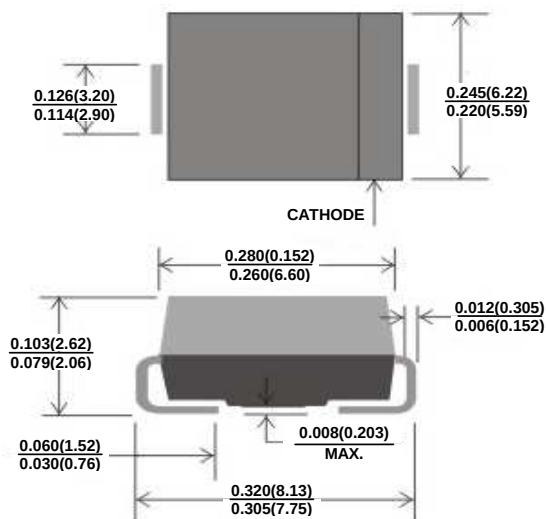

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

PARAMETER	SYMBOLS	SKL32C	SKL33C	SKL34C	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	Volts
Maximum RMS voltage	V _{RMS}	14	21	28	Volts
Minimum Reverse Breakdown Voltage	V _R	20	30	40	Volts
Average Rectified current	I(AV)	3			Amp
Non-repetitive Peak Forward Surge Current at 1=8.3ms	I _{FSM}	80			Amps
Maximum Forward Voltage at I _F =3.0A	V _F	0.38		0.45	Volts
Reverse Leakage Current at V _{RRM}	I _R	0.5			mA
Typical Junction Capacitance (NOTE 1)	C _J	500			pF
Typical Thermal Resistance (NOTE 2)	R _{θJA}	55			℃/W
Operating Junction Temperature Range	T _J	-55 ~ +125			℃
Storage Temperature Range	T _{STG}	-50 ~ +150			℃

Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2. Mounted with minimum recommended padsize PCBoard FR4.

3. $T_J=25^{\circ}C$ unless otherwise specified.



SKL32C THRU SKL34C

RATINGS AND CHARACTERISTIC CURVES

FIG. 1- FORWARD CURRENT DERATING CURVE

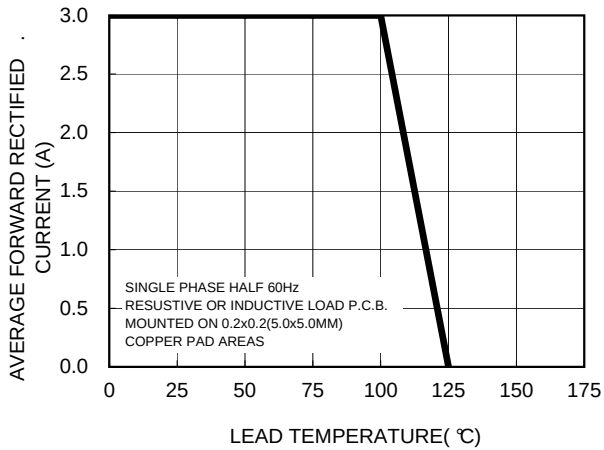


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

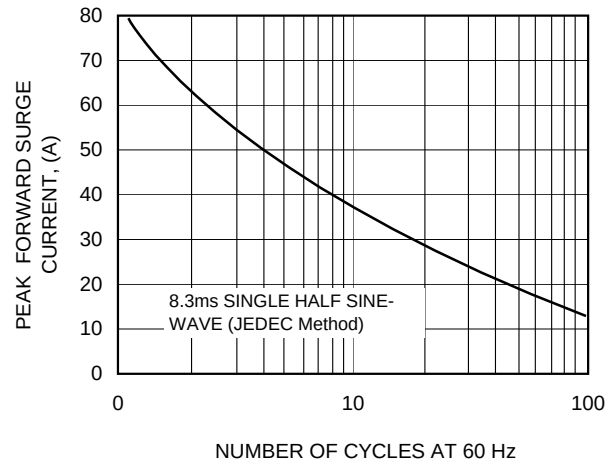


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

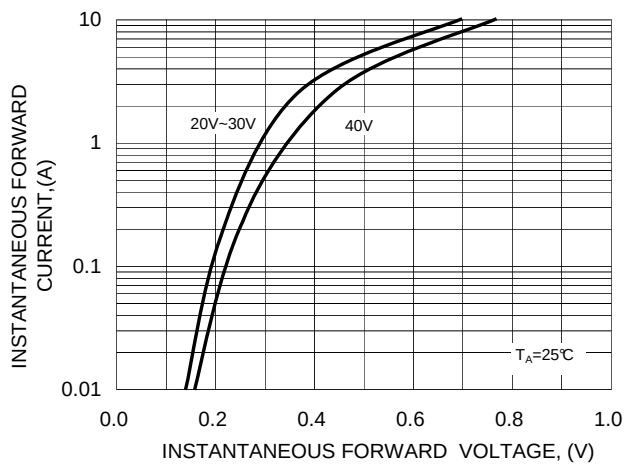


FIG. 4-TYPICAL INSTANTANEOUS REVERSE CHARACTERISTICS

