



Phase Control Thyristor

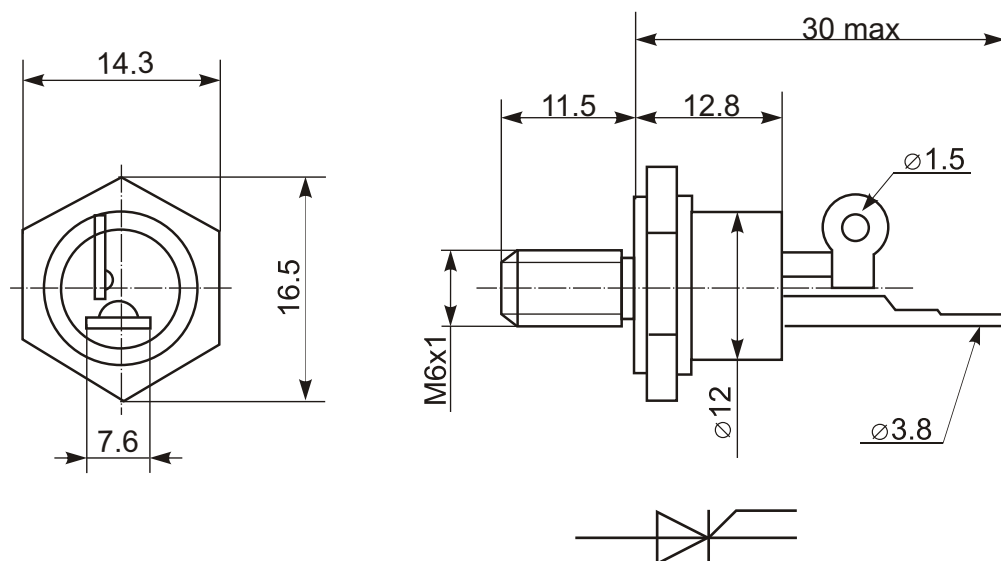

Type	V_{RRM}	I_{TAVM} ($T_{c, 50^{\circ}C}$)	I_{TRMS}	I_{TSM}	$(di/dt)_{cr}$	$(dv/dt)_{cr}$	V_{TM}	I_{TM}	V_{GT}	I_{GT}	V_{TO}	r_T	T_{VJM}	R_{thJC}
	V	A	A	kA	A/ μs	V/ μs	V	A	V	mA	V	m Ω	$^{\circ}C$	K/W
SMT-50	300-1200	50 (90)	80	1.38	150	500	1.7	157	3.5	100	1.05	4.0	125	0.35

**Features:**

- Hermetic metal case with ceramic insulator
- Capacity of supporting high surge current
- International standard case

Typical Applications:

- Controlled DC power supplies
- DC motor controls
- AC switch and thermal control