




Sichuan Institute of Piezoelectric and Acoustooptic Technology


SP835D20 SAW Delay Lines Electrical Characteristic

Parameter	Unit	Minimum	Typical	Maximum
Frequency	MHz		815~855	
Insertion Loss	dB		20	30
3 dB Bandwidth	MHz		110	
Passband variation	dB		1	2
Group Delay	usec	1.9	2.0	2.1
Ultimate Rejection	dB	30	33	
Substrate Material		Y128-X LN		
Ambient Temperature	°C	25		
Package		6/14		


Type performance

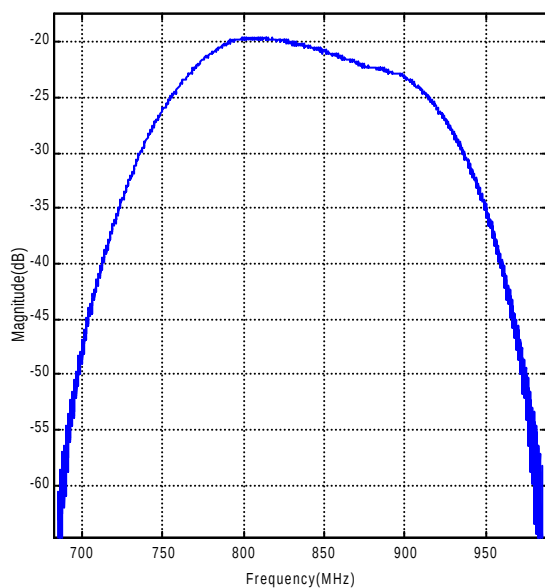


Type performance

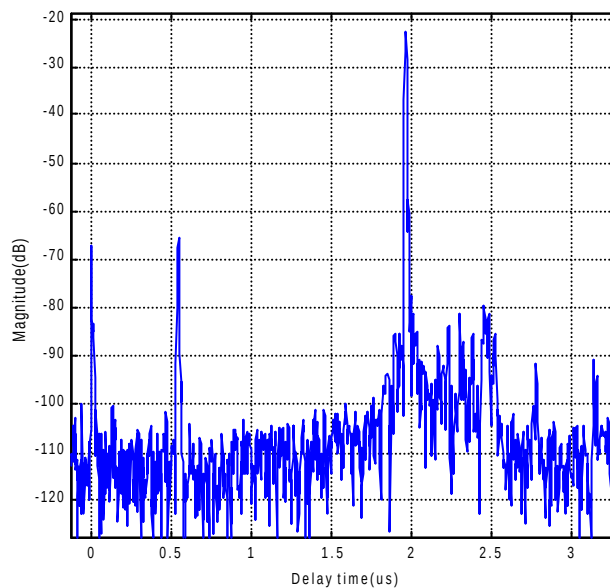

SP835D20 SAW Delay Lines Typical Performance

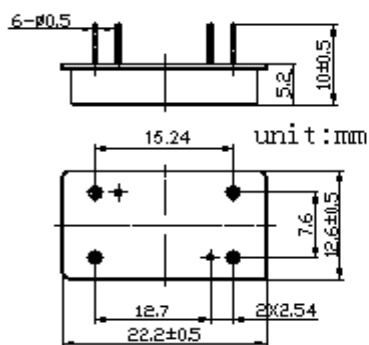

Package Outline

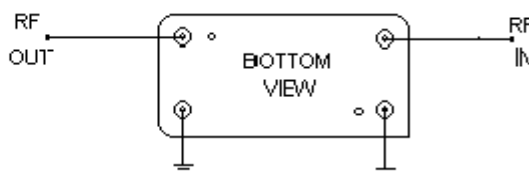

Source/Load Impedance=50ohm

Matching Configurate