

General Description

The SPA Series ChipSwitch uses exclusive International Rectifier S³X power integrated circuit technology to form a fully functioning solid-state relay. The S³X technology combines MOS and bipolar processes, derived from IR's HEXFET® power MOSFET designs, to eliminate the need for both discrete components and hybrid circuits. The basic SPA Series ChipSwitch consists of two identical power integrated circuits connected in inverse parallel (analogous to back-to-back SCRs) for AC control plus an isolated GaAlAs light emitting diode (LED) for actuation.


Extreme reliability is achieved by the reduction of component count from approximately 20 discrete components in a conventional SSR to 3 basic components in the ChipSwitch.

The SPA Series ChipSwitch is a single-pole, normally-open SSR capable of switching up to 0.9 ARMS low power factor load currents with precise zero-voltage turn-on and zero-current turn-off, thus reducing EMI emissions.

These devices are ideally suited for interfacing microprocessors to AC loads, such as small motors, lamps, solenoids, valves and high power motor starters. The economy of the SPA Series ChipSwitch allows the in-house manufacturer to replace assemblies of triacs, triac drivers and associated components with a highly reliable, miniature, standard SSR.

SPA Series Features

- S³X power IC chips ■
- 24 Amp surge ■
- 4,000 V_{RMS} I/O isolation ■
- 10 µA off-state leakage current ■
- Zero-voltage turn-on ■
- Operates without snubber ■
- 600 V/µs off-state dv/dt ■
- Solid-State reliability ■
- UL recognized and CSA certified ■

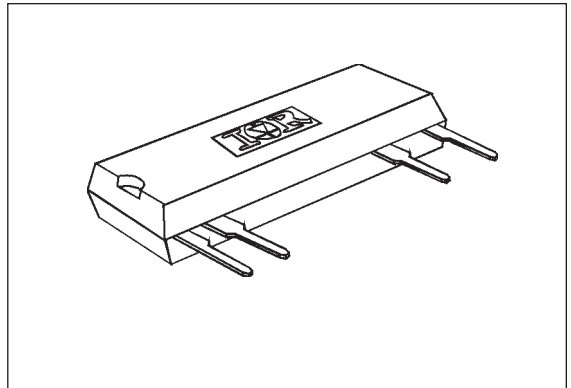

Part Identification

Part Number	Transient Overvoltage (V _{PEAK})	Operating Voltage (V _{RMS})
SPA4191	400	20-140
SPA6191	600	20-280

Series SPA — ChipSwitch® SIP Relay

International
IOR Rectifier

Electrical Specifications ($-30^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ unless otherwise specified)

INPUT CHARACTERISTICS	Limits	Units
Maximum Turn-On Current	10.0	mA
Minimum Turn-On Current	0.5	mA
Control Current Range (Caution: current limit input LED, see figure 3)	10 to 25	mA
Maximum Reverse Voltage	7.0	V

OUTPUT CHARACTERISTICS	Limits		Units
	SPA4191	SPA6191	
Operating Voltage Range (47 - 63 Hz)	20-140	20-280	V _{RMS}
Transient Overvoltage (non-repetitive)	400	600	V _{PEAK}
Maximum Load Current @ $T_A=+40^{\circ}\text{C}$ (see figure 1; Notes 3 and 4)	0.9		A _{RMS}
Minimum Load Current	0.5		mA _{RMS}
Minimum Off-State dv/dt (see Note 1)	600		V/ μS
Power Factor Range	0.2 to 1.0		—
Maximum On-State Voltage Drop @ 0.9 A _{RMS}	1.4		V _{PEAK}
Maximum Off-State Leakage Current (see Note 2)	10		μA_{RMS}
Maximum Turn-On Time (60 Hz)	8.3		ms
Maximum Turn-Off Time (60 Hz)	8.3		ms
Maximum Surge Current, Single-Cycle, Non-Repetitive 20 ms (see figure 2)	24		A _{PEAK}
Maximum Overcurrent, Non-Repetitive 1 second	7.5		A _{PEAK}
Maximum I ² T for Fusing (0.01 sec)	4.5		A ² s
Maximum Zero Voltage Turn-On	12		V _{PEAK}

GENERAL CHARACTERISTICS	Limits	Units
Minimum Dielectric Strength, Input-Output	4000	V _{RMS}
Minimum Insulation Resistance, Input-Output @ $T_A=+25^{\circ}\text{C}$, 50%RH, 500V _{DC}	10 ¹²	Ω
Tracking Resistance (VDE Test)	KB 100/A	—
Maximum Capacitance, Input-Output	2.0	pF
Maximum Pin Soldering Temperature (10 seconds maximum)	+260	$^{\circ}\text{C}$
Ambient Temperature Range:	Operating	
	Storage	

Notes:

- Off-state dv/dt test method per EIA/NARM standard RS-443 with V_p equal to the instantaneous peak of the maximum operating voltage.
- LED input current of zero mA and at maximum operating voltage.
- Load current rating may be extended to 1.1 A_{RMS} (@ $T_{\text{AMB}} \leq +40^{\circ}\text{C}$) by using an external snubber circuit: 0.033 μF +100 Ω .
- The UL508 motor control rating per Sec. 52 overload test conditions is 0.4A max., and general purpose and incandescent load control is 0.9A.

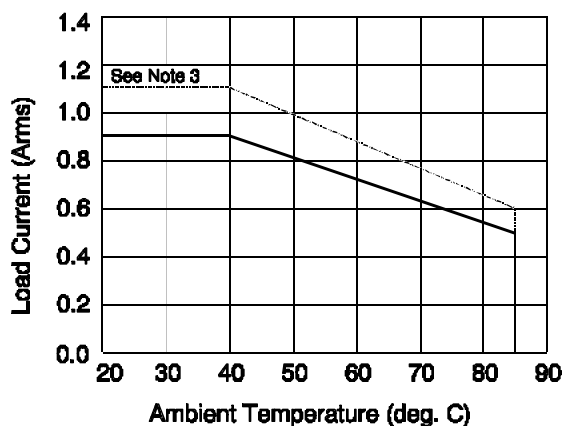


Figure 1. Derating Curve, Free Standing

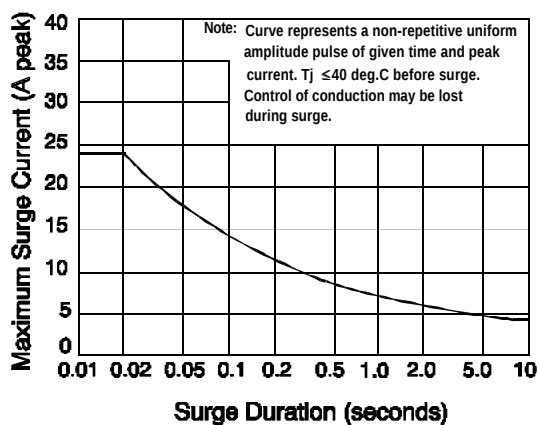


Figure 2. Maximum Allowable Surge

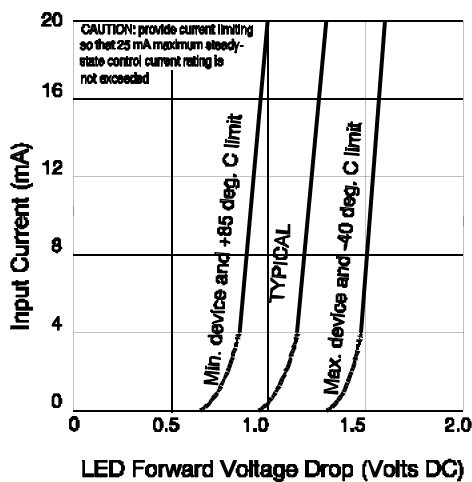



Figure 3. Input Characteristics (Current Controlled)

Series SPA — ChipSwitch® SIP Relay

International
IOR Rectifier


Case Outline

Dimensions in millimeters (inches)

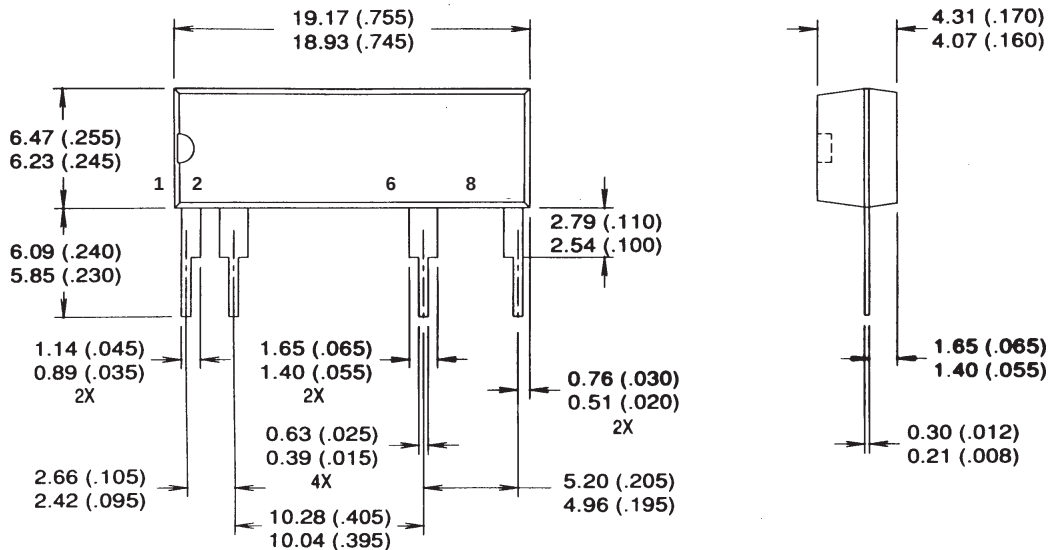

NOTES:

1. CONTROLLING DIMENSION: INCH.
2. ALL DIMENSIONS ARE SHOWN IN MILLIMETERS (INCHES).

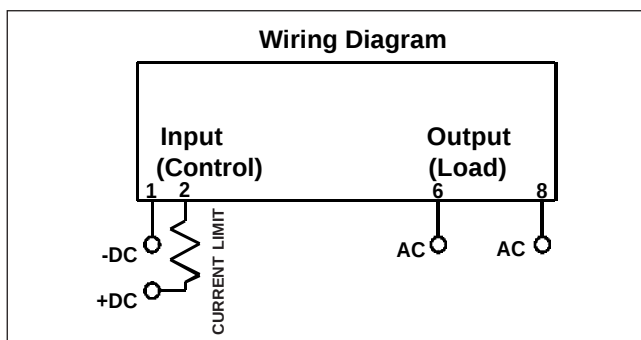

International
IOR Rectifier

WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, Tel: (310) 322 3331

EUROPEAN HEADQUARTERS: Hurst Green, Oxted, Surrey RH8 9BB, UK Tel: ++ 44 1883 713215

IR CANADA: 7321 Victoria Park Ave., Suite 201, Markham, Ontario L3R 2Z8, Tel: (905) 475 1897

IR GERMANY: Saalburgstrasse 157, 61350 Bad Homburg Tel: ++ 49 6172 96590

IR ITALY: Via Liguria 49, 10071 Borgaro, Torino Tel: ++ 39 11 451 0111

IR FAR EAST: K&H Bldg., 2F, 3-30-4 Nishi-Ikeburo 3-Chome, Toshima-Ku, Tokyo, Japan 171 Tel: ++ 81 3 3983 0641

IR SOUTHEAST ASIA: 315 Outram Road, #10-02 Tan Boon Liat Building, Singapore 0316 Tel: ++ 65 221 8371

<http://www.irf.com/>

Data and specifications subject to change without notice. 9/96