

SOLID STATE DEVICES, INC.

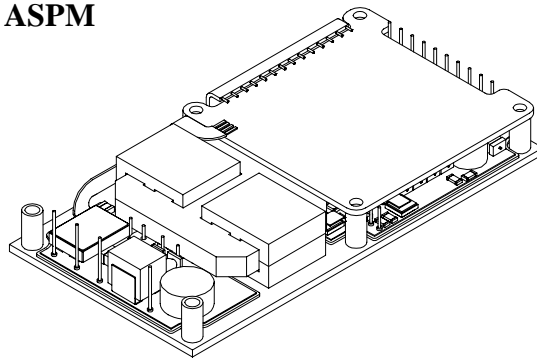
14005 Stage Road * Santa Fe Springs, Ca 90670
 Phone: (562) 404-4474 * Fax: (562) 404-1773

DESIGNER'S DATA SHEET**FEATURES:**

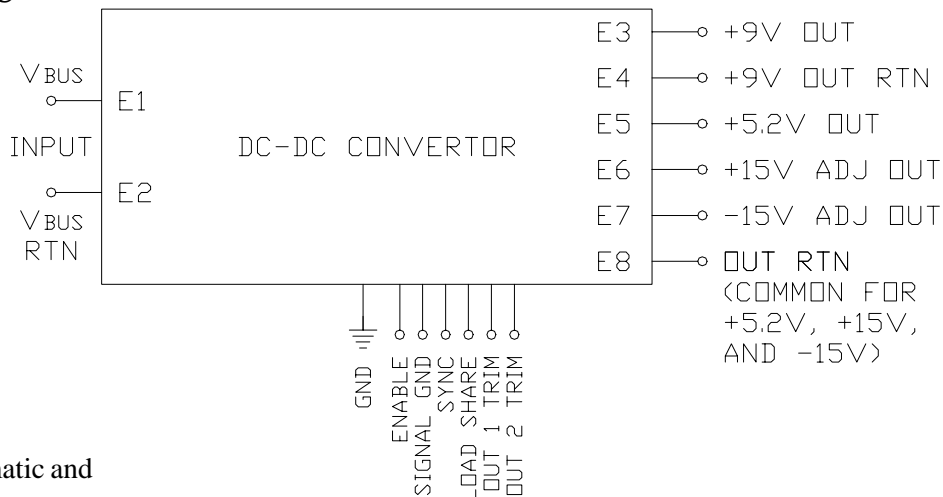
- **Application:** Satellite Power Conversion Requiring Radiation Hardening
- **Conversion @ 1100 Hz; Control @ 600Hz**
- **50 - 75 W Typical Power Processing Capability**
- **Input Filter, Short Circuit & Overvoltage Protection Included**
- **High Power Density Hermetic Design**
- **Low Profile and Low Weight**
- **Excelent Thermal Management**
- **EMI Shield and Low Noise Design**
- **TX, TXV, and S Level Screening Available**
- **Consult Factory for Different Voltages, Currents.**

SPMC387-01

**50 WATT
 RADIATION HARDENED
 DC-DC POWER
 CONVERTER**

ASPM**MAXIMUM RATINGS**

CHARACTERISTIC	SYMBOL	VALUE	UNIT
INPUT VOLTAGE	V_{IN}	80 - 105	Volts
OUTPUT VOLTAGE	V_{01} V_{02} V_{03} V_{04}	+9.0 +5.2 +15 -15	Volts
OUTPUT CURRENT	I_{01} I_{02} I_{03} I_{04}	10 20 2 2	Amps
Operating and Storage Temperature Range	T_{OP} & T_{STG}	-20 TO +125	°C

ELECTRICAL SCHEMATIC

Consult Factory for Detail Schematic and
 Package Outline w/Dimensions

NOTE: All specifications are subject to change without notification.
 SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: PM0007A

