




SR220 thru SR2200



Schottky Barrier Rectifiers

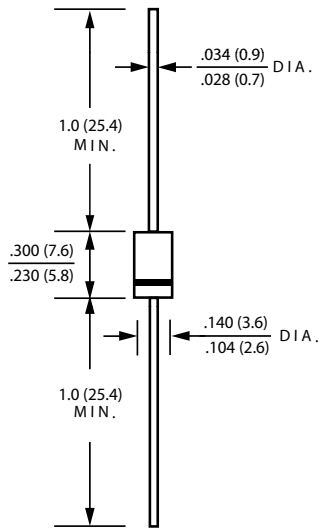

DO-15

Dimensions in inches and (millimeters)



Ordering Information

Part Number	Remark
SR2xx	General
SR2xx-H	Halogen Free
SR2xx-Q	Automotive

PRIMARY CHARACTERISTICS

I_F	2A
V_{RRM}	20~200V
I_{FSM}	50A
V_F	0.50V, 0.70V, 0.85V, 0.87V, 0.90V
$T_J \text{ max}$	125°C, 150°C

Features

- Guardring for overvoltage protection
- Very small conduction losses
- Low forward voltage drop
- Component in accordance to RoHS 2002/95/EC
- AEC-Q101 qualified

Mechanical Data

- Cases: DO-15
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Terminals: Lead free Plating (Tin Finish)
Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 0.373 grams (approximate)

MAXIMUM RATINGS (TA=25°C unless otherwise noted)

PARAMETER	SYMBOL	SR 220	SR 230	SR 240	SR 250	SR 260	SR 280	SR 2100	SR 2150	SR 2200	UNIT
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	50	60	80	100	150	200	V
Maximum RMS voltage	V _{RMS}	14	21	28	35	42	56	70	105	140	V
Maximum DC blocking voltage	V _{DC}	20	30	40	50	60	80	100	150	200	V
Maximum average forward rectified current	I _F	2.0									A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I _{FSM}	50.0									A
Maximum Instantaneous Forward Voltage IF=2A @ 25°C	V _F	0.50			0.70		0.85		0.87	0.90	V
Maximum DC Reverse Current @ Tc=25°C at Rated DC Blocking Voltage @ Tc=100°C	I _R	0.5 15					0.2 5.0			mA	
Typical Junction Capacitance(NOTE1)	C _j	150			120		100				pF
Typical Thermal Resistance	R _{θJa} R _{θJC}	60 30									°C/W
Operating Temperature Range	T _J	-55 to +125					-55 to +150				°C
Storage Temperature Range	T _{STG}	-55 to +150									°C

NOTES:1.Measured at 1.0MHZ and applied reverse voltage of 4.0V DC



FIG. 1-TYPICAL FORWARD CURRENT DERATING CURVE

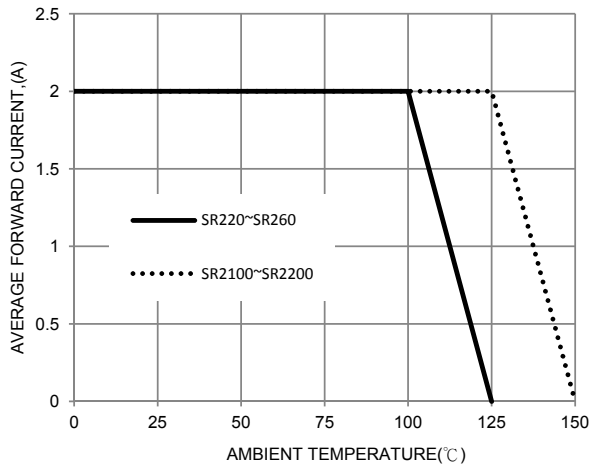


FIG. 2-TYPICAL FORWARD CHARACTERISTICS

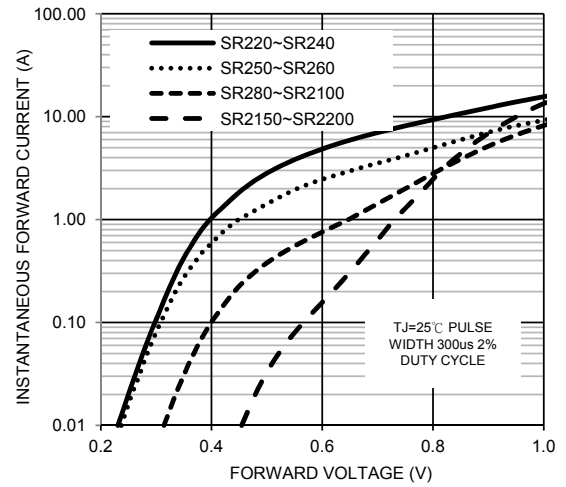


FIG. 3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

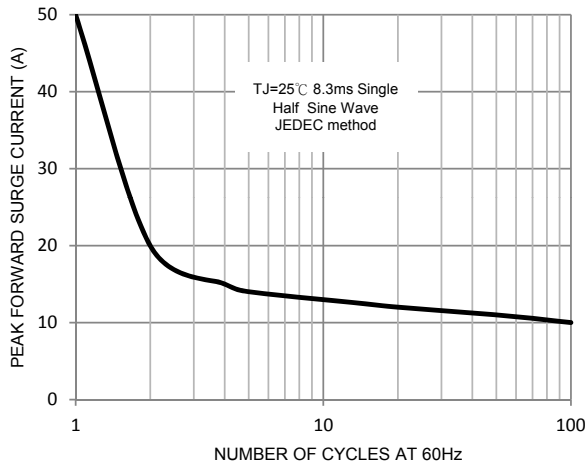


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

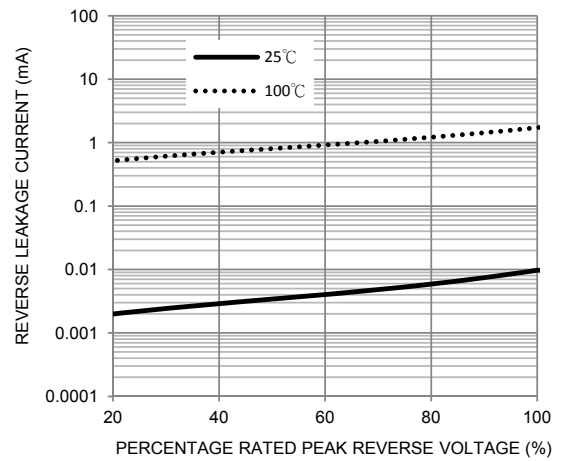


FIG. 5-TYPICAL JUNCTION CAPACITANCE

