

M·C·C

Micro Commercial Components
21201 Itasca Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

Features

- Low Cost
- Low Leakage
- Low Forward Voltage Drop
- High Current Capability
- For Automotive Applications

Maximum Ratings

- Operating Temperature: -50°C to +175°C
- Storage Temperature: -50°C to +175°C

MCC Catalog Number	Device Marking	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
SRA251	---	50V	35V	50V
SRA252	---	100V	70V	100V
SRA253	---	200V	140V	200V
SRA254	---	400V	280V	400V
SRA255	---	600V	420V	600V
SRA256	---	800V	560V	800V
SRA257	---	1000V	700V	1000V


Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	$I_{F(AV)}$	25A	$T_A = 150^\circ C$
Peak Forward Surge Current	I_{FSM}	400A	8.3ms, half sine
Maximum Instantaneous Forward Voltage	V_F	1.1V	$I_{FM} = 25A$; $T_J = 25^\circ C$ *
Maximum DC Reverse Current At Rated DC Blocking Voltage	I_R	$25 \mu A$ $250 \mu A$	$T_J = 25^\circ C$ $T_J = 100^\circ C$
Typical Junction Capacitance	C_J	300pF	Measured at 1.0MHz, $V_R=4.0V$

*Pulse test: Pulse width 300 μ sec, Duty cycle 2%

**SRA251
THRU
SRA257**


**25Amp Recover
Rectifier
50 to 1000 Volts**

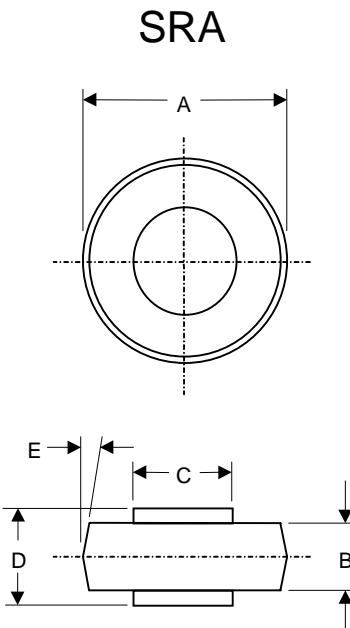

DIM	DIMENSIONS				NOTE	
	INCHES		MM			
	MIN	MAX	MIN	MAX		
A	.332	.342	8.43	8.69		
B	.165	.175	4.19	4.45		
C	.218	.222	5.54	5.64		
D	.234	.246	5.94	6.25		
E	----	5'	---	5'		


SRA251 thru SRA257

Figure 1
Typical Forward Characteristics

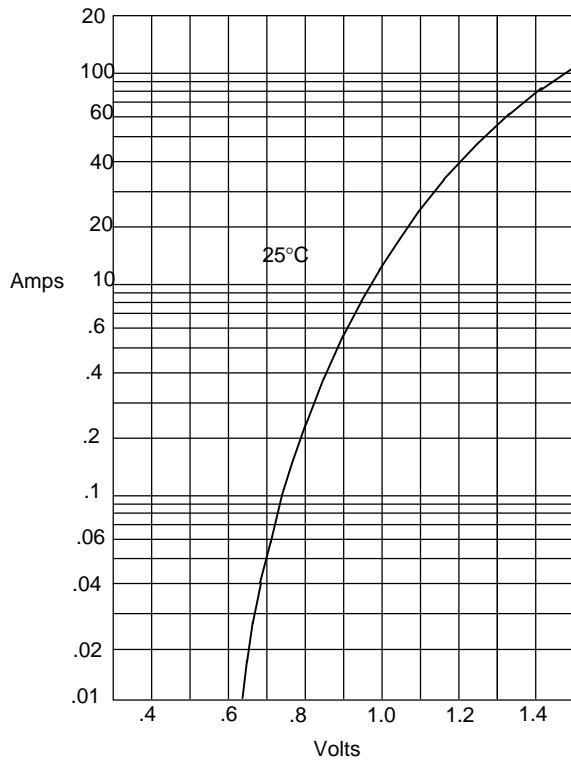


Instantaneous Forward Current - Amperesversus
Instantaneous Forward Voltage - Volts

Figure 2
Forward Derating Curve

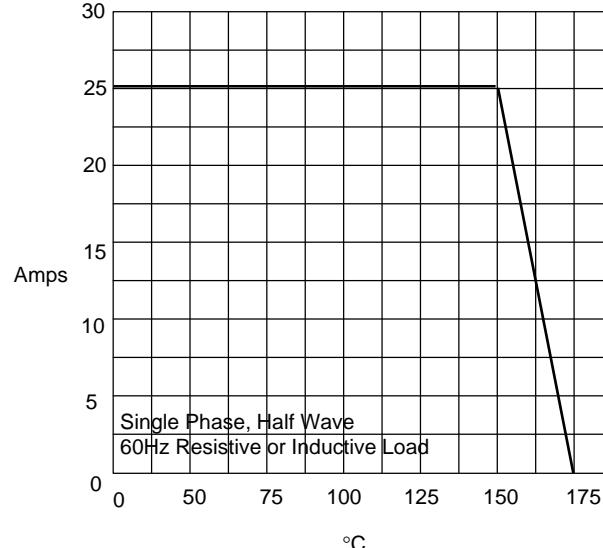


Average Forward Rectified Current - Amperesversus
Ambient Temperature - °C

Figure 4
Peak Forward Surge Current

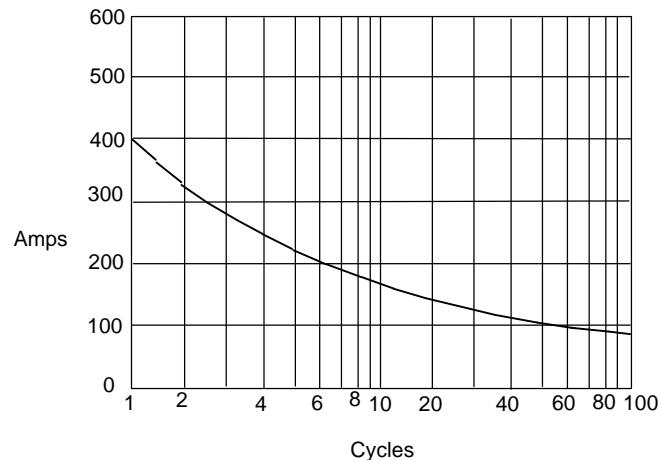

Peak Forward Surge Current - Amperesversus
Number Of Cycles At 60Hz - Cycles

Figure 3
Junction Capacitance

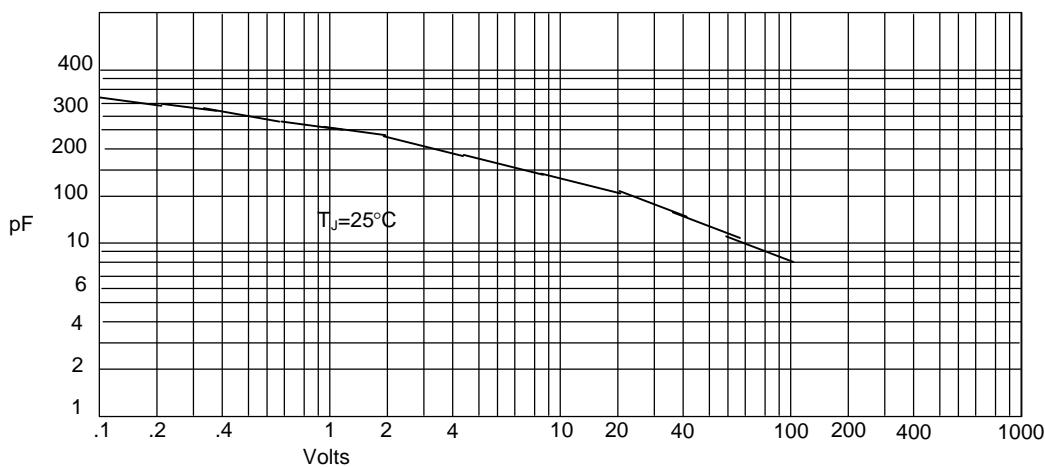

Junction Capacitance - pFversus
Reverse Voltage - Volts