


FEATURES

- Power pack
- Metal silicon junction ,majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss ,high efficiency
- High current capability ,low forward voltage drop
- High forward surge capability
- High frequency operation
- Meets MSL Level 1, per J-STD-020, LF MAX peak of 245°C (for TO-263 package)
- Solder bath temperature 275°C maximum, 10s, per JESD22-B106 (for TO-220AB and ITO-220AB package)
- Component in accordance to RoHS 2011/65/EU





TO-220AB

SR3080SLCT



ITO-220AB

SRF3080SLCT



TO-263

SR3080SLD1



MECHANICAL DATA

- Case: JEDEC TO-220AB, ITO-220AB, TO-263
- Molding compound meets UL94V-0 flammability rating
- Terminals: Lead solderable per J-STD-002 and JESD22-B102
- Polarity: As marked
- Mounting Torque: 10 in-lbs maximum

TYPICAL APPLICATIONS

For use in low voltage ,high frequency inverters ,DC/DC converters, free wheeling ,and polarity protection applications

MAXIMUM RATINGS

(Ratings at 25°C ambient temperature unless otherwise specified)

Parameter	Symbol	SR3080SLCT, SRF3080SLCT,SR3080SLD1	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	80	V
Maximum average forward rectified current (see fig.1)	Per leg	15.0	A
	Total device	30.0	
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method at rated TL)	I_{FSM}	250	A
Peak repetitive reverse current per diode at $t_p=2\mu s$ 1KHz	I_{RRM}	0.5	A
Operating junction and Storage temperature range	T_J, T_{stg}	-55 to+150	°C
Isolation voltage (ITO-220AB only) from terminals to heatsink $t=1$ min	V_{AC}	1500	V

PRIMARY CHARACTERISTICS

$I_F(AV)$	$2 \times 15A$
V_{RRM}	80V
I_{FSM}	250A
VF at $I_F=15.0A$,Per leg,125°C	0.49V
I_r	50 μA
$T_J(MAX)$	150°C
Package	TO-220AB, ITO-220AB, TO-263
Diode variations	Common cathode

RATINGS AND CHARACTERISTIC OF SR3080SLCT,SRF3080SLCT,SR3080SLD1

ELECTRICAL CHARACTERISTCS (TA=25℃ Unless otherwise noted)

Parameter	Test Conditions		Symbol	TYP.	MAX.	Unit
Instaneous forward voltage	TA=25℃	IF=3.0A	VF 1)	0.40	—	V
		IF=5.0A		0.43	—	
		IF=15.0A		0.54	0.60	
	TA=125℃	IF=3.0A		0.28	—	
		IF=5.0A		0.33	—	
		IF=15.0A		0.49	—	
Reverse current	VR=80V	TA=25℃	IR 2)	50	100	μ A
		TA=100℃		10	—	mA
		TA=125℃		40	—	
Typical junction capacitance	4V, 1MHz		CJ	1400		pF

Notes: 1.Pulse test: 300 μs pulse width,1% duty cycle
2.Pulse test: pulse width≤40ms

THERMAL CHARACTERISTCS (TA=25℃ Unless otherwise noted)

Parameter	Symbol	SR3080SLCT	SRF3080SLCT	SR3080SLD1	Unit
Typical thermal resistance 3)	RθJC	2.5	4.5	2.5	℃/W

3.Thermal resistance from junction to case

AVAILABALE PACK INFORMATION

Product code	Pack	Box Size L×W×H(mm)	Quantity(pcs/box)	Carton SizeL×W×H(mm)	Quantity(box/carton)
SR3080SLCT-TO-220AB	P/T	558×148×38	1000	565×225×170	5
SRF3080SLCT-ITO-220AB	P/T	558×148×38	1000	565×225×170	5
SR3080SLD1-TO-263	P/T	558×148×38	1000	565×225×170	5

RATINGS AND CHARACTERISTIC OF SR3080SLCT,SRF3080SLCT,SR3080SLD1

FIG.1-FORWARD CURRENT DERATING CURVE

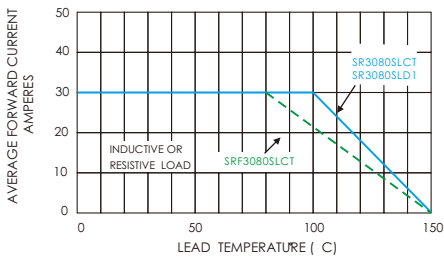


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

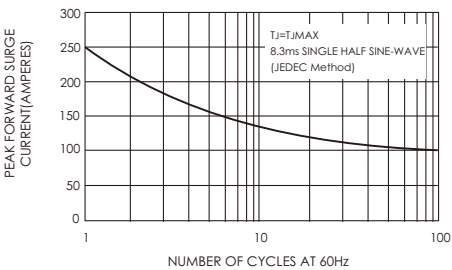


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

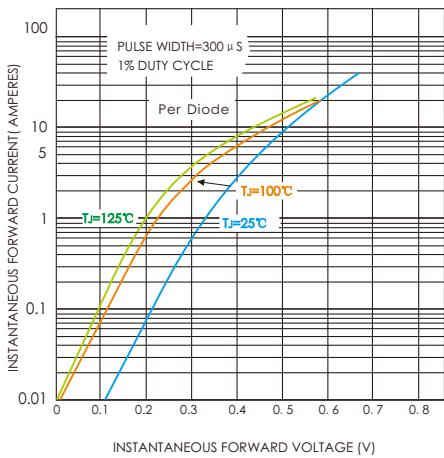


FIG.4-TYPICAL REVERSE CHARACTERISTICS



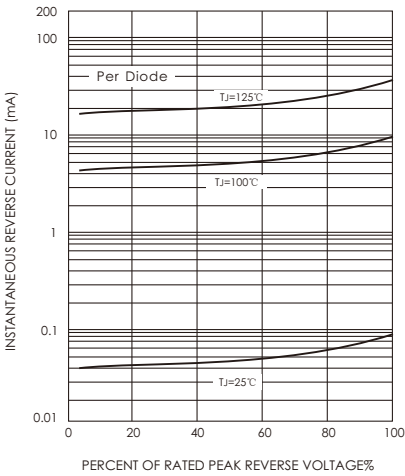


FIG.5-TYPICAL JUNCTION CAPACITANCE

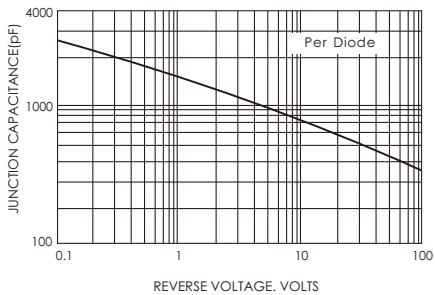


PACKAGE OUTLINE DIMENSIONS


TO-220AB

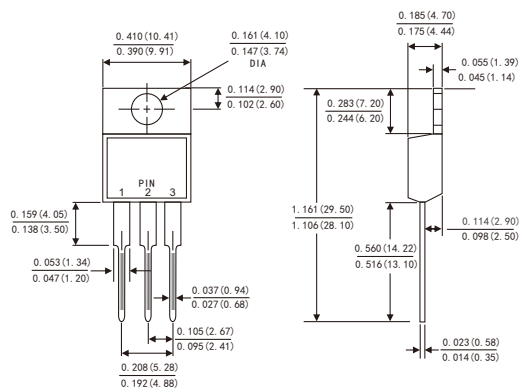


ITO-220AB

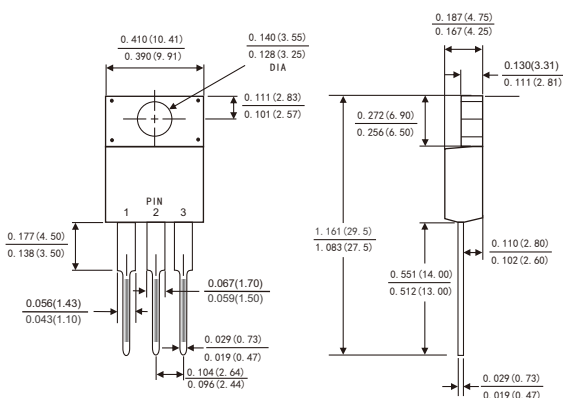

TO-263

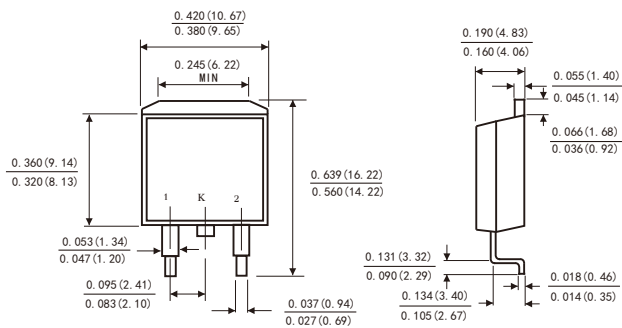

Suggested Pad Layout



Dimensions in inches and (millimeters)