

### Schottky Barrier Rectifiers

Using the Schottky Barrier principle with a Refractory metal capable of high temperature operation metal. The proprietary barrier technology allows for reliable operation up to 150°C junction temperature. Typical application are in switching Mode Power Supplies such as adaptors, DC/DC converters, free-wheeling and polarity protection diodes.

#### Features

- \* Low Forward Voltage.
- \* Low Switching noise.
- \* High Current Capacity
- \* Guarantee Reverse Avalanche.
- \* Guard-Ring for Stress Protection.
- \* Low Power Loss & High efficiency.
- \* 150°C Operating Junction Temperature
- \* Low Stored Charge Majority Carrier Conduction.
- \* Plastic Material used Carries Underwriters Laboratory Flammability Classification 94V-O
- \* Moisture Sensitivity Level: MSL-1



\* In compliance with EU RoHs 2002/95/EC directives

### MAXIMUM RATINGS

Characteristic	Symbol	SRT5150M	Unit
Peak Repetitive Reverse Voltage	$V_{RRM}$	150	V
Working Peak Reverse Voltage	$V_{RWM}$		
DC Blocking Voltage	$V_R$		
RMS Reverse Voltage	$V_{R(RMS)}$	105	V
Average Rectifier Forward Current	$I_O$	5	A
Non-Repetitive Peak Surge Current (Surge applied at rate load conditions halfware, single phase, 60Hz)	$I_{FSM}$	100	A
Operating and Storage Junction Temperature Range	$T_J, T_{stg}$	-65 to +150	°C

### THERMAL RESISTANCES

Typical Thermal Resistance junction from Junction to ambient	$R_{\theta JA}$	7.5	°C/w
--------------------------------------------------------------	-----------------	-----	------

### ELECTRICAL CHARACTERISTICS


Characteristic	Symbol	Min.	Typ.	Max.	Unit
Maximum Instantaneous Forward Voltage ( $I_F = 0.1$ Amp $T_C = 25^\circ\text{C}$ ) ( $I_F = 5.0$ Amp $T_C = 25^\circ\text{C}$ )	$V_F$	---	0.48 0.88	0.50 0.90	V
Maximum Instantaneous Reverse Current (Rated DC Voltage, $T_C = 25^\circ\text{C}$ ) (Rated DC Voltage, $T_C = 125^\circ\text{C}$ )	$I_R$	---	0.008 12	0.01 15	mA

### SCHOTTKY BARRIER RECTIFIERS

**5 AMPERES  
150 VOLTS**



**DO-201AD**



DIM	MILLIMETERS	
	MIN	MAX
A	5.00	5.60
B	25.40	---
C	8.50	9.50
D	1.20	1.30

CASE---  
Transfer molded plastic

POLARITY---  
Cathode indicated polarity band

# SRT5150M

FIG-1 FORWARD CURRENT DERATING CURVE

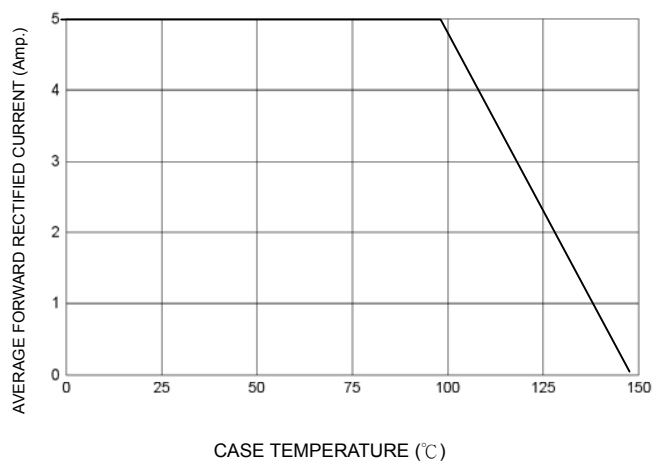


FIG-2 TYPICAL FORWARD CHARACTERISTICS

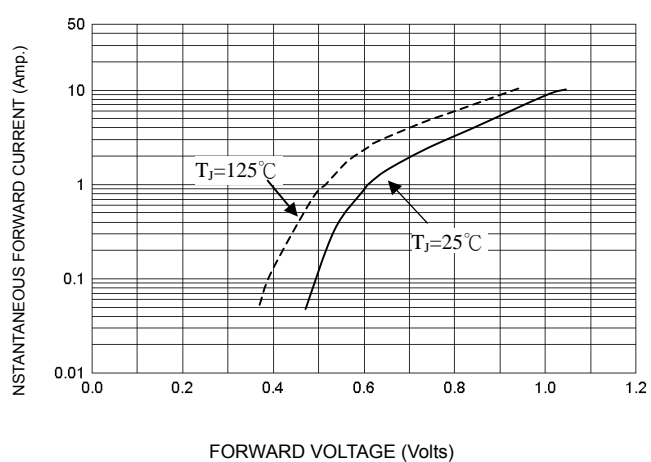


FIG-3 TYPICAL REVERSE CHARACTERISTICS

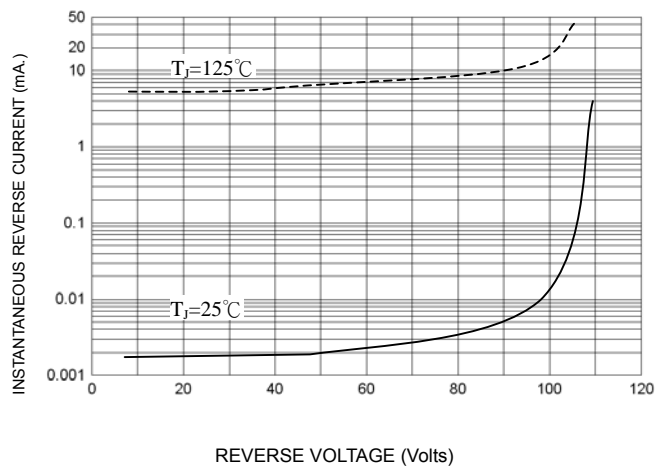


FIG-4 TYPICAL JUNCTION CAPACITANCE

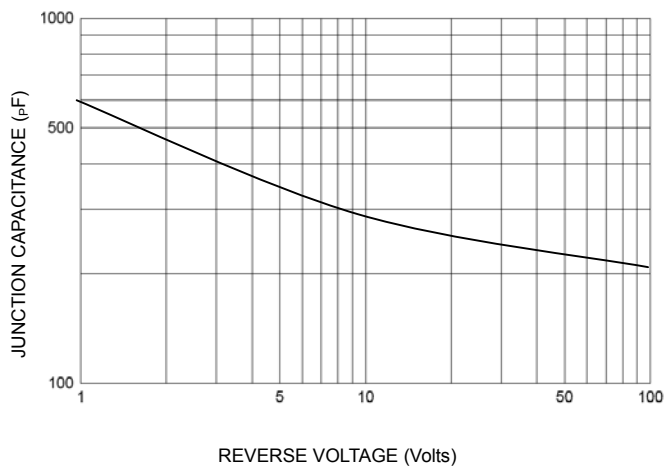


FIG-5 PEAK FORWARD SURGE CURRENT

