
DISCRETE POWER DIODES and THYRISTORS
DATA BOOK

INVERTER GRADE THYRISTORS

Hockey Puk Version

Features

- Metal case with ceramic insulator
- International standard case TO-200AB (A-PUK)
- All diffused design
- Center amplifying gate
- Guaranteed high dV/dt
- Guaranteed high dI/dt
- High surge current capability
- Low thermal impedance
- High speed performance

Typical Applications

- Inverters
- Choppers
- Induction heating
- All types of force-commutated converters

370A



case style TO-200AB (A-PUK)




Major Ratings and Characteristics

Parameters	ST203C..C	Units
$I_{T(AV)}$	370	A
@ T_{hs}	55	°C
$I_{T(RMS)}$	700	A
@ T_{hs}	25	°C
I_{TSM} @ 50Hz	5260	A
@ 60Hz	5510	A
I^2t @ 50Hz	138	KA ² s
@ 60Hz	126	KA ² s
V_{DRM}/V_{RRM}	1000 to 1200	V
t_q range	20 to 30	μs
T_j	- 40 to 125	°C

ELECTRICAL SPECIFICATIONS**Voltage Ratings**

Type number	Voltage Code	$V_{\text{DRM}}/V_{\text{RRM}}$, maximum repetitive peak voltage V	V_{RSM} , maximum non-repetitive peak voltage V	$I_{\text{DRM}}/I_{\text{RRM}}$ max. @ $T_J = T_J \text{ max.}$ mA
ST203C..C	10	1000	1100	40
	12	1200	1300	

Current Carrying Capability

Frequency							Units
50Hz	860	750	1340	1160	5620	5020	A
400Hz	840	706	1400	1220	2940	2590	
1000Hz	700	580	1350	1170	1750	1520	
2500Hz	430	340	980	830	910	780	
Recovery voltage Vr	50	50	50	50	50	50	V
Voltage before turn-on Vd	V _{DRM}		V _{DRM}		V _{DRM}		
Rise of on-state current di/dt	50	50	-	-	-	-	A/µs
Heatsink temperature	40	55	40	55	40	55	°C
Equivalent values for RC circuit	47Ω / 0.22µF		47Ω / 0.22µF		47Ω / 0.22µF		

On-state Conduction

Parameter		ST203C..C	Units	Conditions		
I _{T(AV)}	Max. average on-state current @ Heatsink temperature	370 (140)	A	180° conduction, half sine wave double side (single side) cooled		
		55 (85)	°C			
I _{T(RMS)}	Max. RMS on-state current	700	A	DC @ 25°C heatsink temperature double side cooled		
I _{TSM}	Max. peak, one half cycle, non-repetitive surge current	5260		t = 10ms	No voltage	Sinusoidal half wave, Initial T _J = T _J max
		5510		t = 8.3ms	reapplied	
		4420		t = 10ms	100% V _{RRM}	
		4630		t = 8.3ms	reapplied	
I ² t	Maximum I ² t for fusing	138		KA ² s	t = 10ms	
		126	t = 8.3ms		reapplied	
		98	t = 10ms		100% V _{RRM}	
		89	t = 8.3ms		reapplied	
I ² √t	Maximum I ² √t for fusing	1380	KA ² √s	t = 0.1 to 10ms, no voltage reapplied		

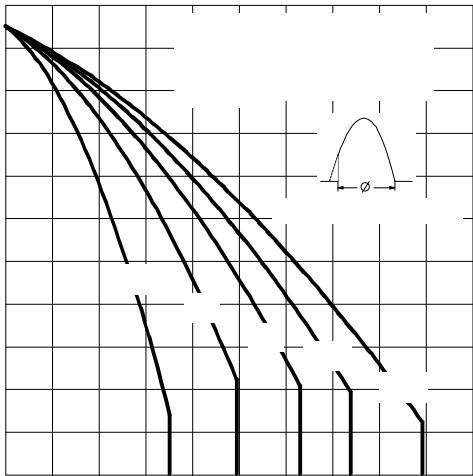


Fig. 3 - Current Ratings Characteristics

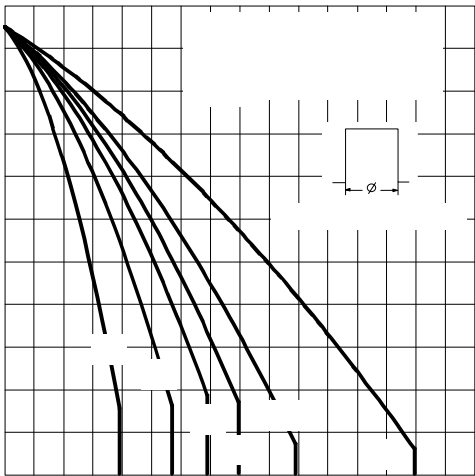


Fig. 4 - Current Ratings Characteristics

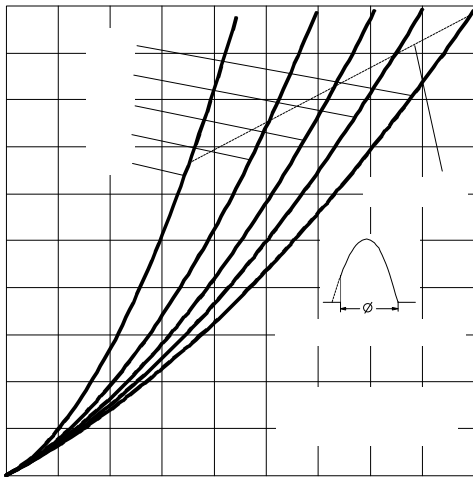


Fig. 5 - On-state Power Loss Characteristics

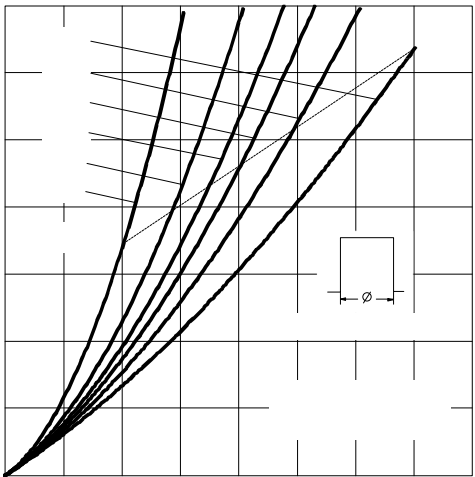


Fig. 6 - On-state Power Loss Characteristics

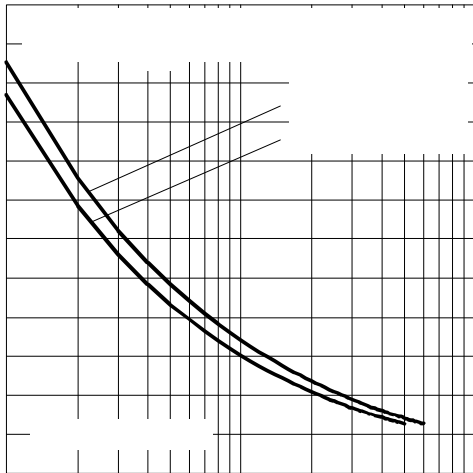


Fig. 7 - Maximum Non-repetitive Surge Current

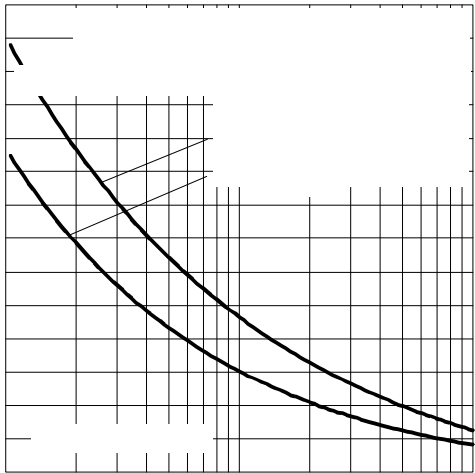


Fig. 8 - Maximum Non-repetitive Surge Current

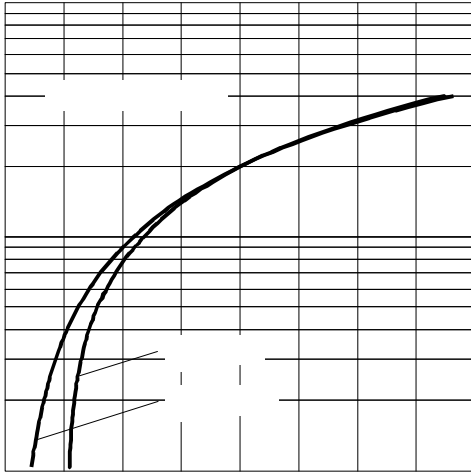


Fig. 9 - On-state Voltage Drop Characteristics

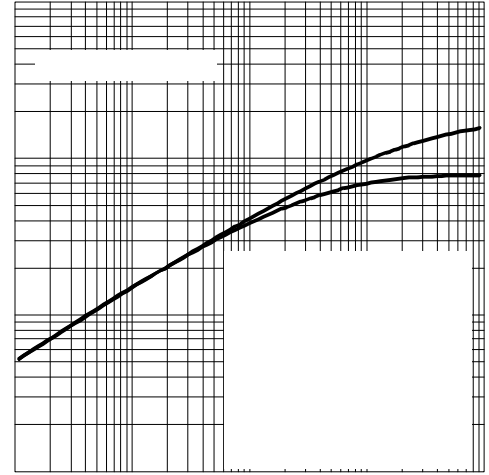
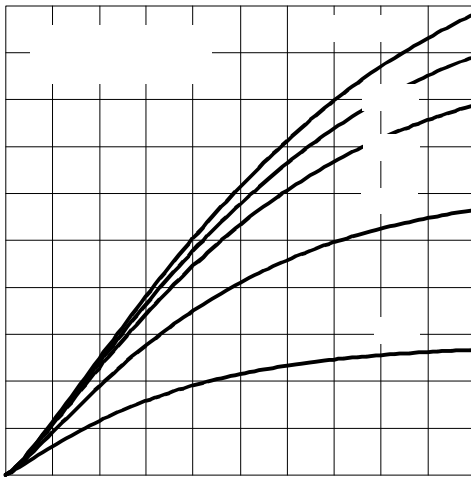
Fig. 10 - Thermal Impedance Z_{thJ-hs} Characteristics

Fig. 11 - Reverse Recovered Charge Characteristics

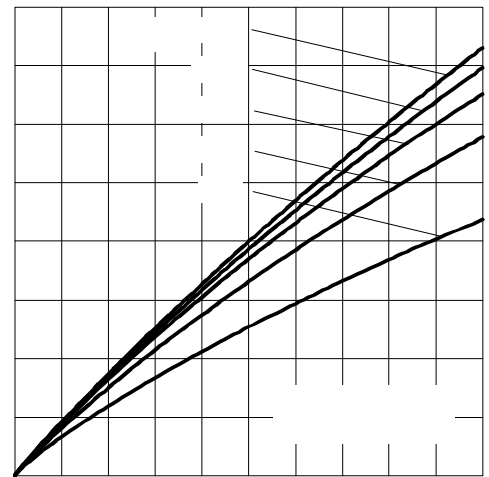


Fig. 12 - Reverse Recovery Current Characteristics

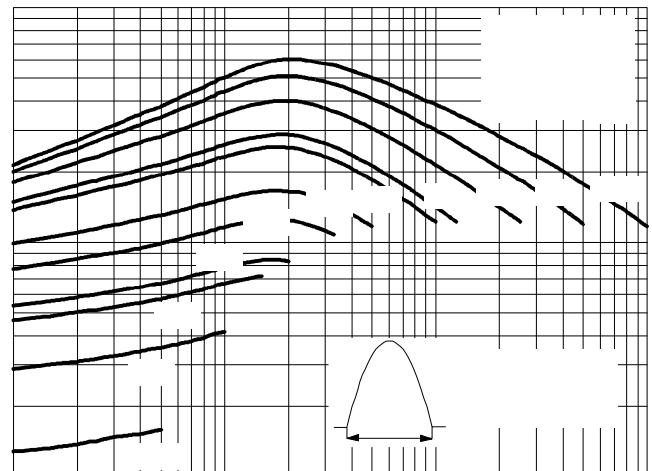
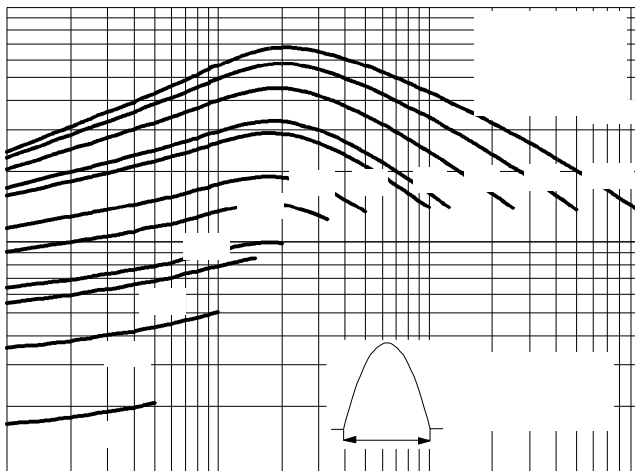


Fig. 13 - Frequency Characteristics

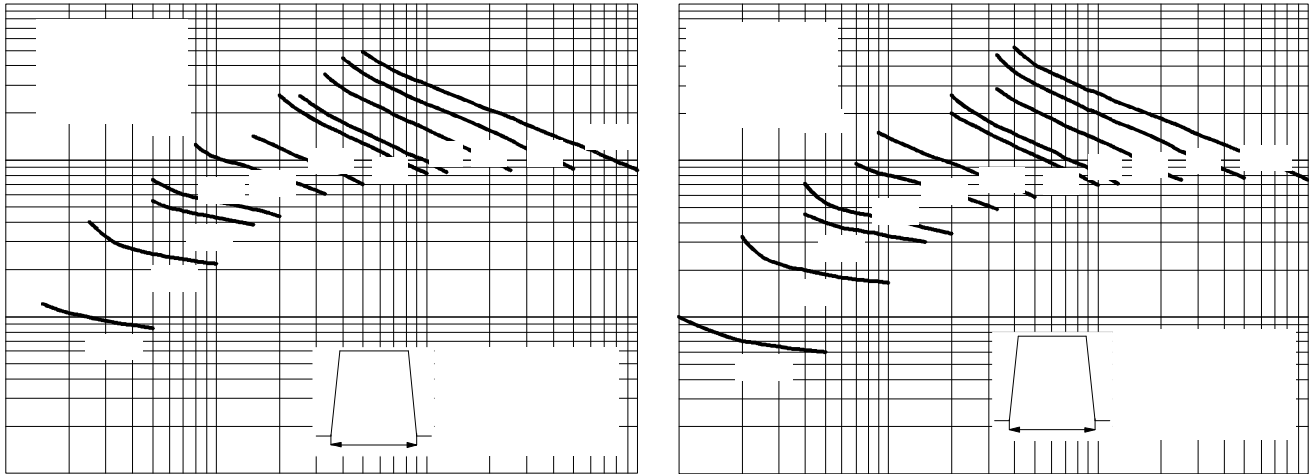


Fig. 14 - Frequency Characteristics

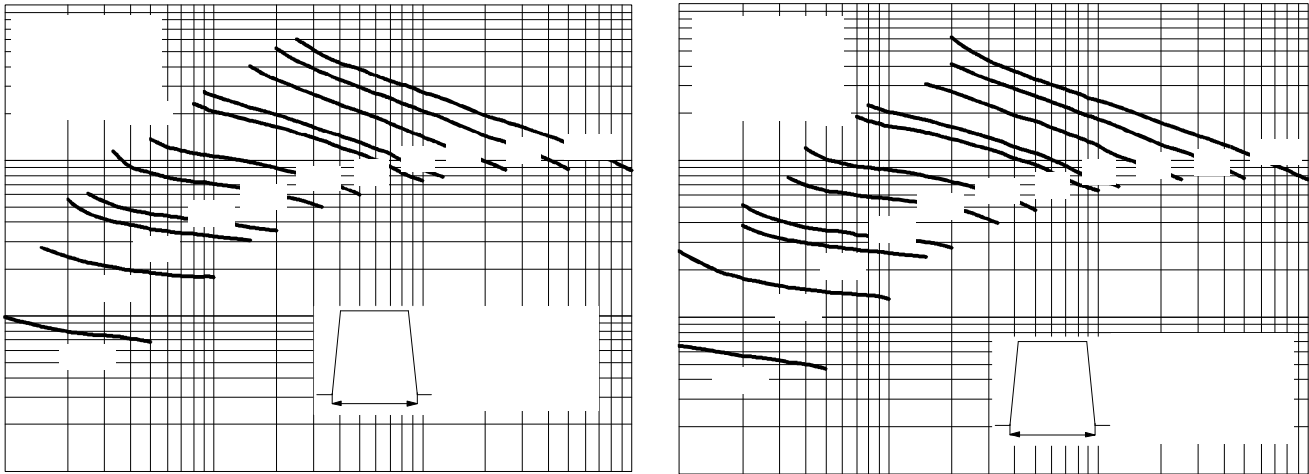


Fig. 15 - Frequency Characteristics

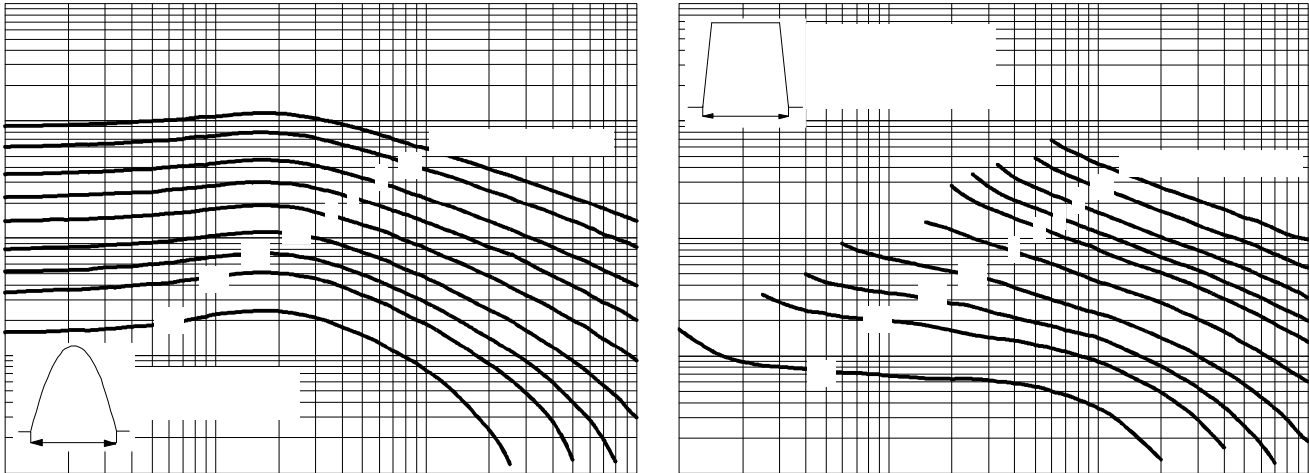


Fig. 16 - Maximum On-state Energy Power Loss Characteristics

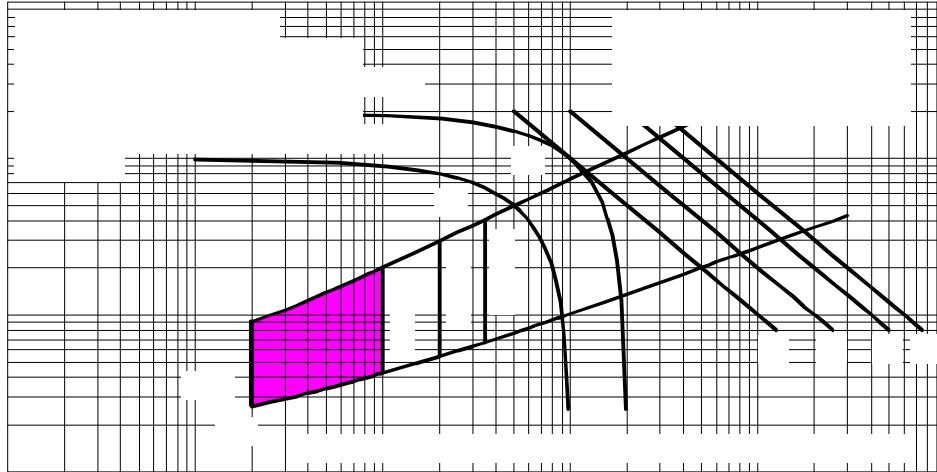


Fig. 17 - Gate Characteristics

On-state Conduction

Parameter	ST203C..C	Units	Conditions
V_{TM} Max. peak on-state voltage	1.72	V	$I_{TM} = 600A$, $T_J = T_J \text{ max}$, $t_p = 10\text{ms}$ sine wave pulse
$V_{T(To)1}$ Low level value of threshold voltage	1.17		$(16.7\% \times \pi \times I_{T(AV)} < I < \pi \times I_{T(AV)})$, $T_J = T_J \text{ max}$.
$V_{T(To)2}$ High level value of threshold voltage	1.22		$(I > \pi \times I_{T(AV)})$, $T_J = T_J \text{ max}$.
r_{t1} Low level value of forward slope resistance	0.92	m Ω	$(16.7\% \times \pi \times I_{T(AV)} < I < \pi \times I_{T(AV)})$, $T_J = T_J \text{ max}$.
r_{t2} High level value of forward slope resistance	0.83		$(I > \pi \times I_{T(AV)})$, $T_J = T_J \text{ max}$.
I_H Maximum holding current	600	mA	$T_J = 25^\circ\text{C}$, $I_T > 30A$
I_L Typical latching current	1000		$T_J = 25^\circ\text{C}$, $V_A = 12V$, $R_a = 6\Omega$, $I_G = 1A$

Switching

Parameter	ST203C..C	Units	Conditions
di/dt Max. non-repetitive rate of rise of turned-on current	1000	A/ μs	$T_J = T_J \text{ max.}$, $V_{DRM} = \text{rated } V_{DRM}$ $I_{TM} = 2 \times di/dt$
t_d Typical delay time	0.8	μs	$T_J = 25^\circ\text{C}$, $V_{DM} = \text{rated } V_{DRM}$, $I_{TM} = 50A \text{ DC}$, $t_p = 1\mu\text{s}$ Resistive load, Gate pulse: 10V, 5 Ω source
t_q Max. turn-off time	Min 20 Max 30		$T_J = T_J \text{ max}$, $I_{TM} = 300A$, commutating $di/dt = 20A/\mu\text{s}$ $V_R = 50V$, $t_p = 500\mu\text{s}$, dv/dt : see table in device code

Blocking

Parameter	ST203C..C	Units	Conditions
dv/dt Maximum critical rate of rise of off-state voltage	500	V/ μs	$T_J = T_J \text{ max}$. linear to 80% V_{DRM} , higher value available on request
I_{RRM} Max. peak reverse and off-state leakage current I_{DRM}	40	mA	$T_J = T_J \text{ max}$, rated V_{DRM}/V_{RRM} applied

Triggering

Parameter	ST203C..C	Units	Conditions
P_{GM} Maximum peak gate power	60	W	$T_J = T_J \text{ max}$, $f = 50\text{Hz}$, $d\% = 50$
$P_{G(AV)}$ Maximum average gate power	10		
I_{GM} Max. peak positive gate current	10	A	$T_J = T_J \text{ max}$, $t_p \leq 5\text{ms}$
$+V_{GM}$ Maximum peak positive gate voltage	20	V	$T_J = T_J \text{ max}$, $t_p \leq 5\text{ms}$
$-V_{GM}$ Maximum peak negative gate voltage	5		
I_{GT} Max. DC gate current required to trigger	200	mA	$T_J = 25^\circ\text{C}$, $V_A = 12V$, $R_a = 6\Omega$
V_{GT} Max. DC gate voltage required to trigger	3	V	
I_{GD} Max. DC gate current not to trigger	20	mA	$T_J = T_J \text{ max.}$, rated V_{DRM} applied
V_{GD} Max. DC gate voltage not to trigger	0.25	V	

Thermal and Mechanical Specification

Parameter	ST203C..C	Units	Conditions
T_J Max. operating temperature range	-40 to 125	°C	
T_{stg} Max. storage temperature range	-40 to 150		
R_{thJ-hs} Max. thermal resistance, junction to heatsink	0.17 0.08	K/W	DC operation single side cooled DC operation double side cooled
R_{thC-hs} Max. thermal resistance, case to heatsink	0.033 0.017	K/W	DC operation single side cooled DC operation double side cooled
F Mounting force, $\pm 10\%$	4900 (500)	N (Kg)	
wt Approximate weight	50	g	
Case style	TO - 200AB (A-PUK)		See Outline Table

 ΔR_{thJ-hs} Conduction

(The following table shows the increment of thermal resistance R_{thJ-hs} when devices operate at different conduction angles than DC)

Conduction angle	Sinusoidal conduction		Rectangular conduction		Units	Conditions
	Single Side	Double Side	Single Side	Double Side		
180°	0.015	0.017	0.011	0.011	K/W	$T_J = T_J \text{ max.}$
120°	0.018	0.019	0.019	0.019		
90°	0.024	0.024	0.026	0.026		
60°	0.035	0.035	0.036	0.037		
30°	0.060	0.060	0.060	0.061		

Ordering Information Table

Device Code

ST	20	3	C	12	C	H	H	1	
1	2	3	4	5	6	7	8	9	10

- 1** - Thyristor
- 2** - Essential part number
- 3** - 3 = Fast turn off
- 4** - C = Ceramic Puk
- 5** - Voltage code: Code $\times 100 = V_{RRM}$ (See Voltage Rating Table)
- 6** - C = Puk Case TO-200AB (A-PUK)
- 7** - Reapplied dv/dt code (for t_q test condition)
- 8** - t_q code
- 9** - 0 = Eyelet term. (Gate and Aux. Cathode Unsoldered Leads)
1 = Fast-on term. (Gate and Aux. Cathode Unsoldered Leads)
2 = Eyelet term. (Gate and Aux. Cathode Soldered Leads)
3 = Fast-on term. (Gate and Aux. Cathode Soldered Leads)
- 10** - Critical dv/dt:
None = 500V/ μ sec (Standard value)
L = 1000V/ μ sec (Special selection)

dv/dt - t_q combinations available						
dv/dt (V/ μ s)		20	50	100	200	400
t_q (μ s)	20	CK	DK	EK	--	--
	25	CJ	DJ	EJ	FJ *	--
	30	CH	DH	EH	FH	HH

*Standard part number.
All other types available only on request.

Outline Table

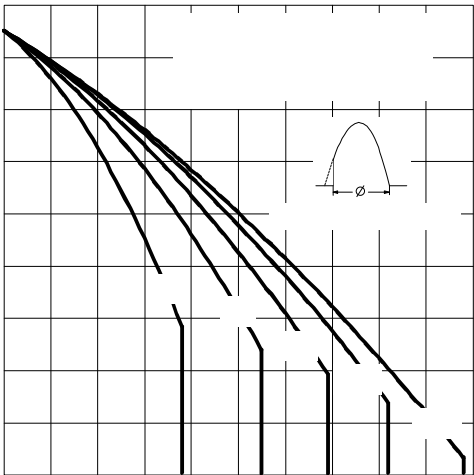
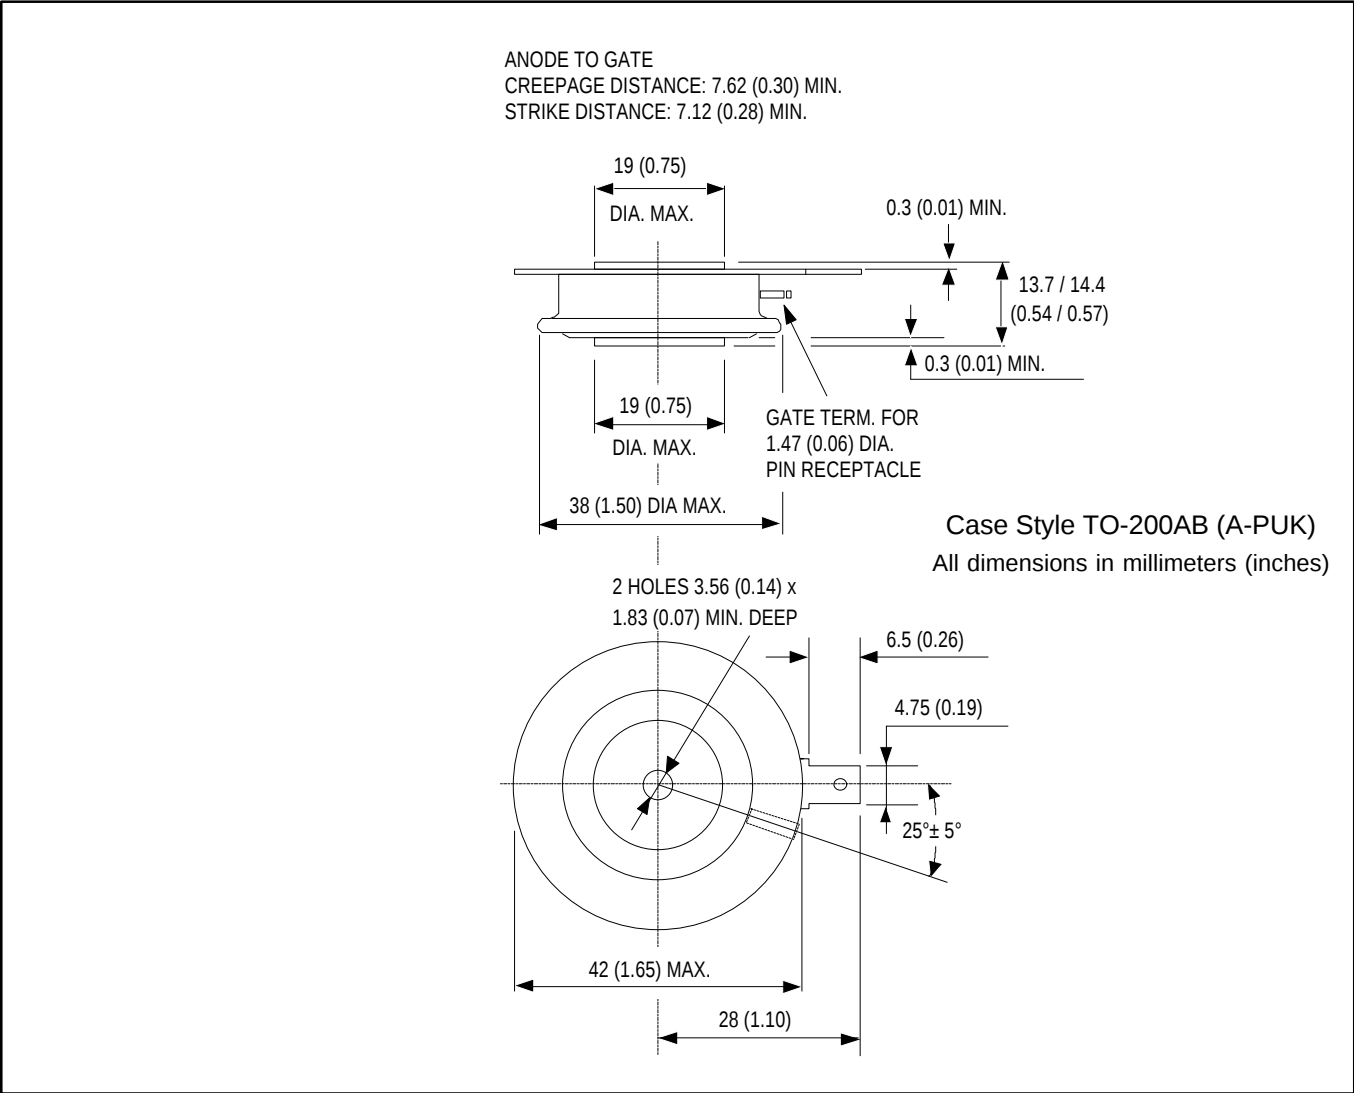


Fig. 1 - Current Ratings Characteristics

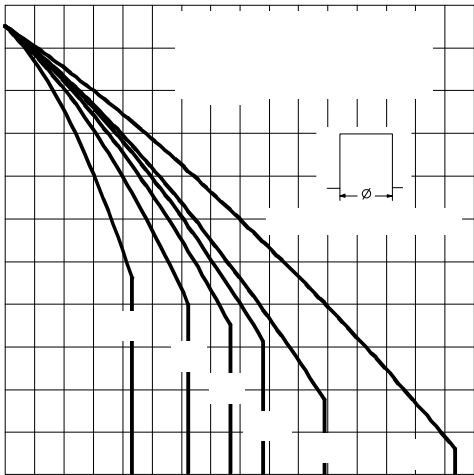


Fig. 2 - Current Ratings Characteristics