



STU/D1855PLS

P-Channel Enhancement Mode Field Effect Transistor

PRODUCT SUMMARY


V _{DSS}	I _D	R _{DS(ON)} (m Ω) Max
-55V	-15A	73 @ V _{GS} = -10V
		90 @ V _{GS} = -4.5V

FEATURES


- Super high dense cell design for low R_{DS(ON)}.
- Rugged and reliable.
- TO-252 and TO-251 Package.



STU SERIES
TO-252AA(D-PAK)



STD SERIES
TO-251(I-PAK)



ABSOLUTE MAXIMUM RATINGS (T_A=25°C unless otherwise noted)

Parameter		Symbol	Limit	Unit
Drain-Source Voltage Rating		V _{spike} ^d	60	V
Drain-Source Voltage		V _{DS}	-55	V
Gate-Source Voltage		V _{GS}	±20	V
Drain Current-Continuous ^a @ T _a	25°C	I _D	-15	A
	70°C		-12	A
-Pulsed ^b		I _{DM}	-30	A
Drain-Source Diode Forward Current ^a		I _S	-10	A
Maximum Power Dissipation ^a	T _a = 25°C	P _D	42	W
	T _a = 70°C		28	
Operating Junction and Storage Temperature Range		T _J , T _{STG}	-55 to 150	°C

THERMAL CHARACTERISTICS

Thermal Resistance, Junction-to-Case	R _{θJC}	3	°C/W
Thermal Resistance, Junction-to-Ambient	R _{θJA}	50	°C/W

S TU/D1855PLS

ELECTRICAL CHARACTERISTICS (TA 25 C unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ ^c	Max	Unit
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} 0V, I _D -250uA	-55			V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} -44V, V _{GS} 0V			-1	uA
Gate-Body Leakage	I _{GSS}	V _{GS} ±20V, V _{DS} 0V			±100	nA
ON CHARACTERISTICS ^b						
Gate Threshold Voltage	V _{GS(th)}	V _{DS} V _{GS} , I _D = -250uA	-1.3	-1.6	-2.5	V
Drain-Source On-State Resistance	R _{DS(ON)}	V _{GS} -10V, I _D -10A		62	73	m-ohm
		V _{GS} -4.5V, I _D -6A		80	90	m-ohm
On-State Drain Current	I _{D(ON)}	V _{DS} = -5V, V _{GS} = -10V	20			A
Forward Transconductance	g _{FS}	V _{DS} -15V, I _D -10A		12		S
DYNAMIC CHARACTERISTICS ^c						
Input Capacitance	C _{ISS}	V _{DS} = -30V, V _{GS} = 0V f = 1.0MHz		925		pF
Output Capacitance	C _{OSS}			86		pF
Reverse Transfer Capacitance	C _{RSS}			61		pF
Gate Resistance	R _g	V _{DS} = 0V, V _{GS} = 0A, f = 1MHz		3.3		ohm
SWITCHING CHARACTERISTICS ^c						
Turn-On Delay Time	t _{D(ON)}	V _D = -30V, I _D = -1A, V _{GEN} = -10V, R _{GEN} = 6 ohm		17.6		ns
Rise Time	t			28		ns
Turn-Off Delay Time	t _{D(OFF)}			87.2		ns
Fall Time	t			27.2		ns
Total Gate Charge	Q _g	V _{DS} = -30V, I _D = -5A, V _{GS} = -10V		18.8		nC
		V _{DS} = -30V, I _D = -5A, V _{GS} = -4.5V		9.2		nC
Gate-Source Charge	Q _{gs}	V _{DS} = -30V, I _D = -5A, V _{GS} = -10V		1.6		nC
Gate-Drain Charge	Q _{gd}			4.7		nC

STU/D1855PLS

ELECTRICAL CHARACTERISTICS (T_A=25 °C unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ ^c	Max	Unit
DRAIN-SOURCE DIODE CHARACTERISTICS ^b						
Diode Forward Voltage	V _{SD}	V _{GS} = 0V, I _S = -10A		-0.9	-1.3	V

Notes

- a.Surface Mounted on FR4 Board, t≤10sec.
- b.Pulse Test:Pulse Width ≤300us, Duty Cycle ≤2%.
- c.Guaranteed by design, not subject to production testing.
- d.Guaranteed when external R_g=6 ohm and t_f < t_f max

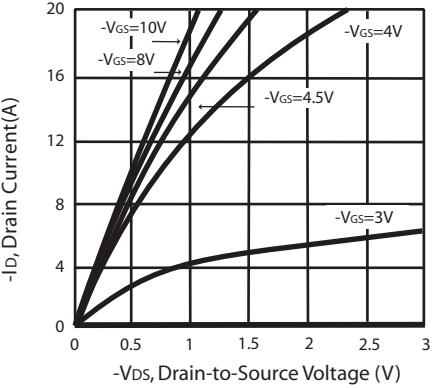


Figure 1. Output Characteristics

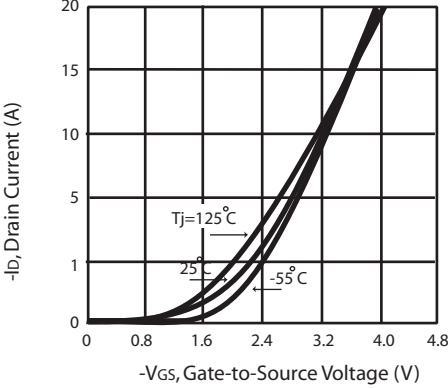


Figure 2. Transfer Characteristics

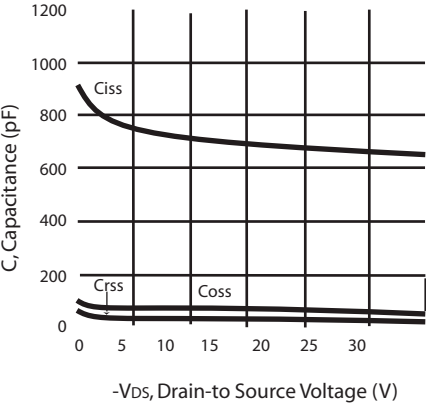


Figure 3. Capacitance

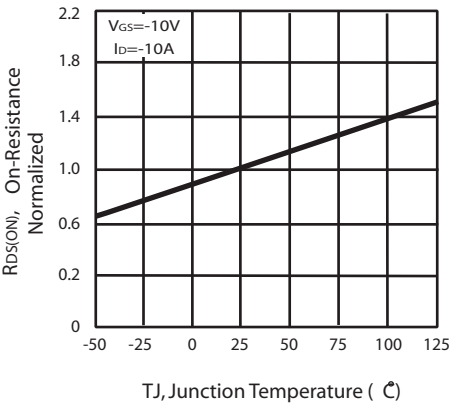


Figure 4. On-Resistance Variation with Temperature

S TU/D1855PLS

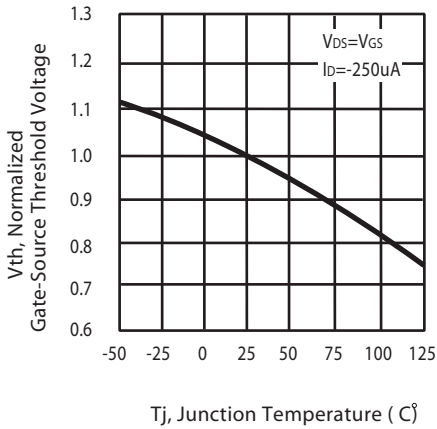


Figure 5. Gate Threshold Variation with Temperature

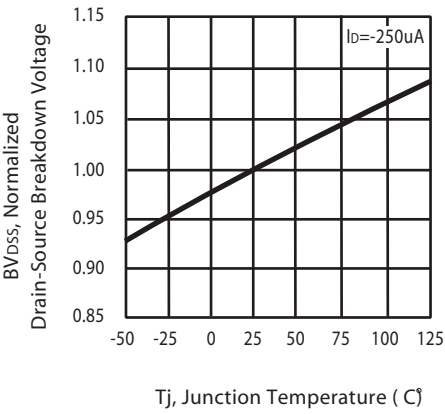


Figure 6. Breakdown Voltage Variation with Temperature

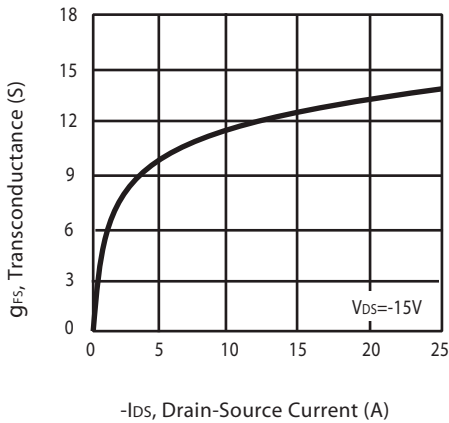


Figure 7. Transconductance Variation with Drain Current

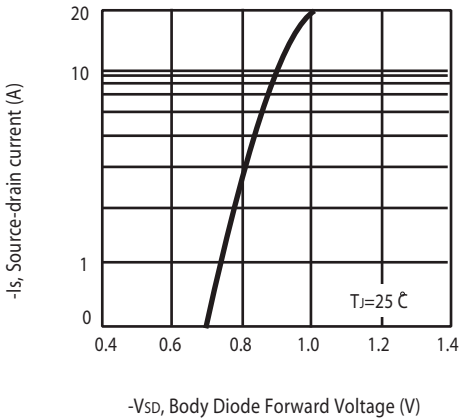


Figure 8. Body Diode Forward Voltage Variation with Source Current

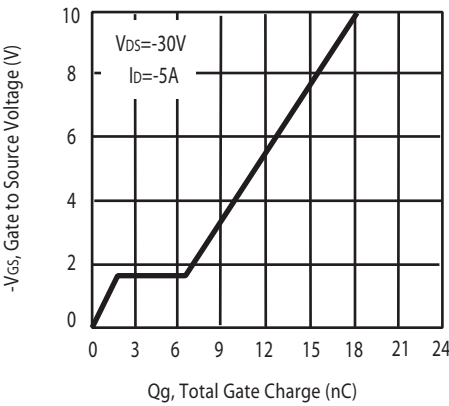


Figure 9. Gate Charge

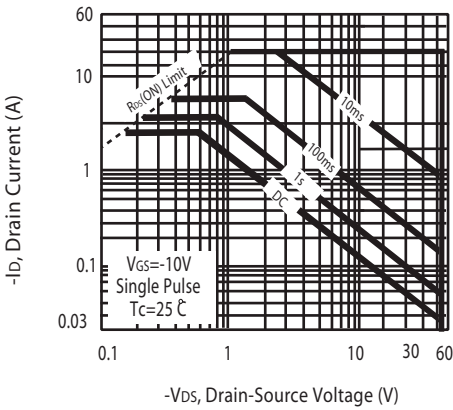


Figure 10. Maximum Safe Operating Area

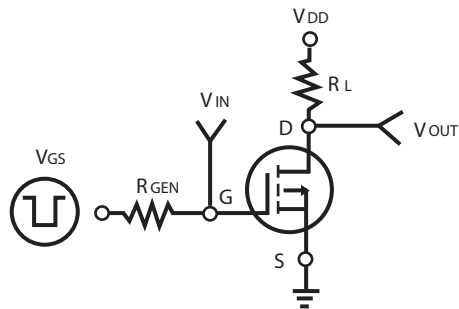


Figure 11. Switching Test Circuit

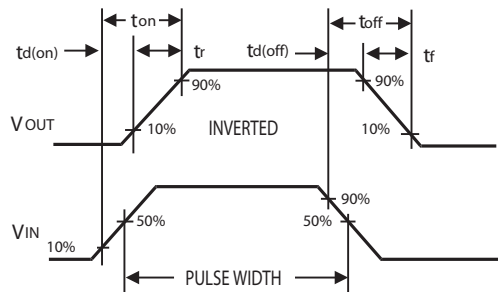


Figure 12. Switching Waveforms


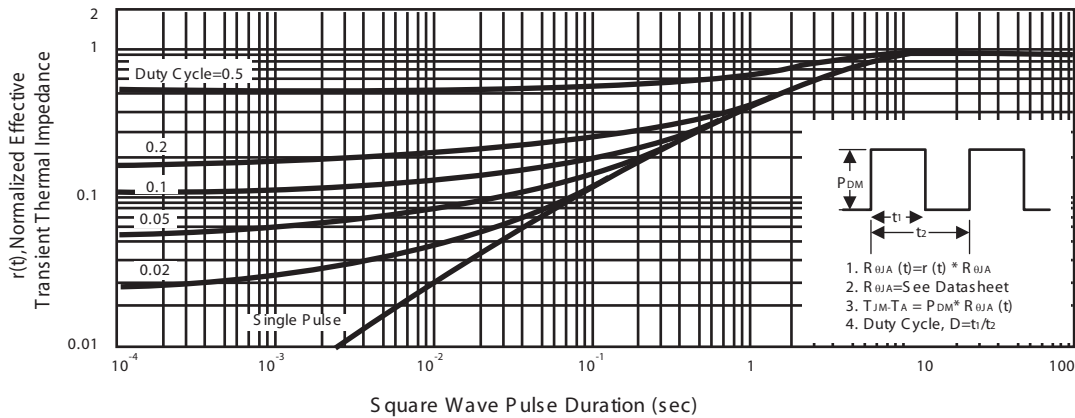


Figure 13. Normalized Thermal Transient Impedance Curve

S TU/D1855PLS

PACKAGE OUTLINE DIMENSIONS

TO-251

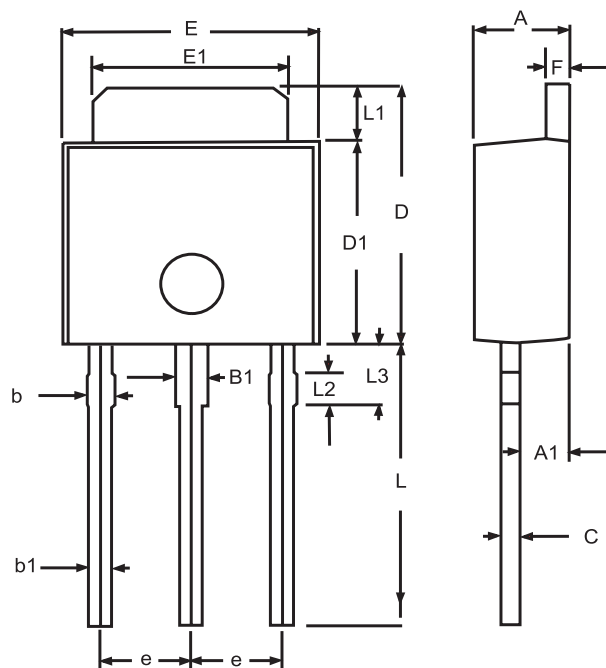


SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	2.20	2.40	0.087	0.095
A1	1.100	1.300	0.043	0.051
B1	0.650	1.050	0.026	0.041
b	0.500	0.900	0.020	0.035
b1	0.400	0.800	0.016	0.32
C	0.400	0.600	0.016	0.024
D	6.700	7.300	0.264	0.287
D1	5.400	5.650	0.213	0.222
E	6.40	6.650	0.252	0.262
e	2.100	2.500	0.083	0.098
F	0.400	0.600	0.016	0.024
L	7.000	8.000	0.276	0.315
L1	1.300	1.700	0.051	0.067
L2	0.700	0.900	0.028	0.035
L3	1.400	1.800	0.055	0.071

S TU/D1855P LS

PACKAGE OUTLINE DIMENSIONS

TO-252

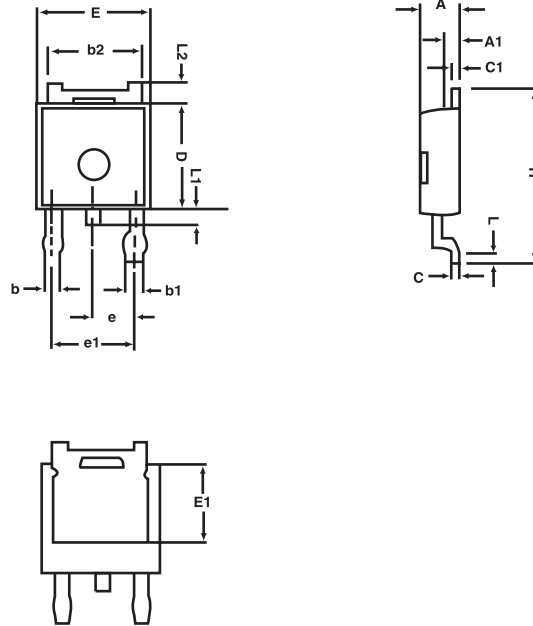


SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	2.25	2.35	0.089	0.093
A1	0.95	1.05	0.037	0.041
b	0.77	0.85	0.030	0.033
b1	0.84	0.94	0.033	0.037
b2	5.30	5.45	0.209	0.215
C	0.49	0.53	0.019	0.021
D	6.00	6.20	0.236	0.244
E	6.40	6.60	0.252	0.260
E1	3.18	3.67	0.125	0.145
e	2.29	BSC	0.090	BSC
H	9.70	10.10	0.382	0.398
L	1.425	1.625	0.056	0.064
L1	0.650	0.850	0.026	0.033
L2	0.600	REF.	0.024	REF.


S TU/D1855PLS

TO251 Tube/TO-252 Tape and Reel Data

TO-251 Tube

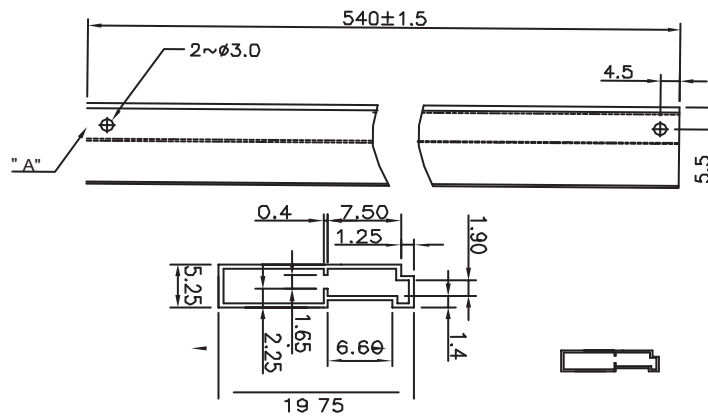


TO-252 Carrier Tape

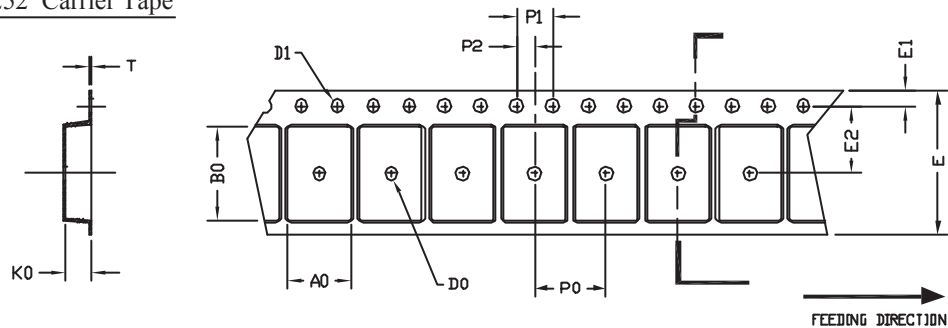

UNIT:mm

PACKAGE	A0	B0	K0	D0	D1	E	E1	E2	P0	P1	P2	T
TO-252(16mm)	6.80 ± 0.1	10.3 ± 0.1	2.50 ± 0.1	$\phi 2$	$\phi 1.5 \pm 0.1$	6.0 ± 0.3	1.75 ± 0.1	7.5 ± 0.15	8.0 ± 0.1	4.0 ± 0.1	2.0 ± 0.15	0.3 ± 0.05

TO-252 Reel

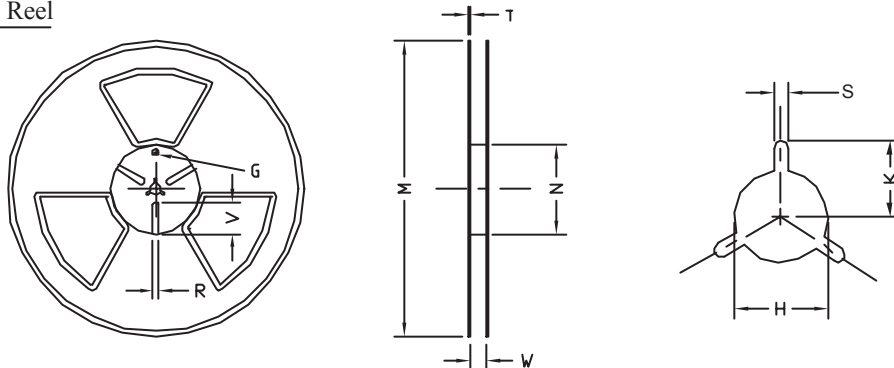

UNIT:mm

TAPE SIZE	REEL SIZE	M	N	W	T	H	K	S	G	R	V
16 mm	$\phi 330$	$\phi 330 \pm 0.5$	97 ± 1.0	17.0 ± 1.5	2.2	$\phi 13.0 \pm 0.5$	10.6 ± 0.2	2.0 ± 0.5	---	---	---