





N-Channel Enhancement Mode Field Effect Transistor

PRODUCT SUMMARY

V _{DSS}	I _D	R _{DS(ON)} (mΩ) Max
100V	2.0A	210 @ V _{GS} =10V
		312 @ V _{GS} =4.5V

FEATURES

- Super high dense cell design for low R_{DS(ON)}.
- Rugged and reliable.
- Surface Mount Package.



ABSOLUTE MAXIMUM RATINGS (T_A=25°C unless otherwise noted)

Symbol	Parameter	Limit	Units
V _{DS}	Drain-Source Voltage	100	V
V _{GS}	Gate-Source Voltage	±20	V
I _D	Drain Current-Continuous ^a	T _A =25°C	2.0
		T _A =70°C	1.6
I _{DM}	-Pulsed ^b	11	A
E _{AS}	Single Pulse Avalanche Energy ^d	20	mJ
P _D	Maximum Power Dissipation	T _A =25°C	1.25
		T _A =70°C	0.8
T _J , T _{STG}	Operating Junction and Storage Temperature Range	-55 to 150	°C

THERMAL CHARACTERISTICS

R _{θJA}	Thermal Resistance, Junction-to-Ambient	100	°C/W
------------------	---	-----	------

ELECTRICAL CHARACTERISTICS (TA=25°C unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
OFF CHARACTERISTICS						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V , I _D =250uA	100			V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =80V , V _{GS} =0V			1	uA
I _{GSS}	Gate-Body Leakage Current	V _{GS} = ±20V , V _{DS} =0V			±100	nA
ON CHARACTERISTICS						
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =250uA	1	1.9	2.5	V
R _{DS(ON)}	Drain-Source On-State Resistance	V _{GS} =10V , I _D =1.00A		168	210	m ohm
		V _{GS} =4.5V , I _D =0.82A		231	312	m ohm
g _{FS}	Forward Transconductance	V _{DS} =10V , I _D =1.00A		1.9		S
DYNAMIC CHARACTERISTICS ^c						
C _{ISS}	Input Capacitance	V _{DS} =25V,V _{GS} =0V f=1.0MHz		310		pF
C _{OSS}	Output Capacitance			38		pF
C _{RSS}	Reverse Transfer Capacitance			24		pF
SWITCHING CHARACTERISTICS ^c						
t _{D(ON)}	Turn-On Delay Time	V _{DD} =50V I _D =1.00A V _{GS} =10V R _{GEN} = 6 ohm		7.7		ns
t _r	Rise Time			9.2		ns
t _{D(OFF)}	Turn-Off Delay Time			16		ns
t _f	Fall Time			4.1		ns
Q _g	Total Gate Charge	V _{DS} =50V,I _D =1.00A,V _{GS} =10V		5.6		nC
		V _{DS} =50V,I _D =1.00A,V _{GS} =4.5V		3.3		nC
Q _{gs}	Gate-Source Charge	V _{DS} =50V,I _D =1.00A,		0.9		nC
Q _{gd}	Gate-Drain Charge	V _{GS} =10V		1.7		nC
DRAIN-SOURCE DIODE CHARACTERISTICS AND MAXIMUM RATINGS						
V _{SD}	Diode Forward Voltage	V _{GS} =0V,I _S =1A		0.79	1.3	V
Notes						
a.Surface Mounted on FR4 Board,t ≤ 10sec.						
b.Pulse Test:Pulse Width ≤ 300us, Duty Cycle ≤ 2%.						
c.Guaranteed by design, not subject to production testing.						
d.Starting T _J =25 ^o C,L=0.5mH,V _{DD} = 50V.(See Figure13)						

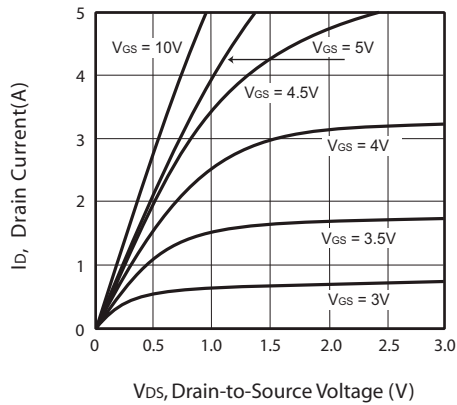


Figure 1. Output Characteristics

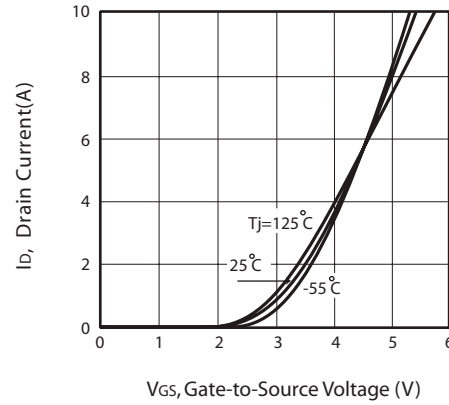


Figure 2. Transfer Characteristics

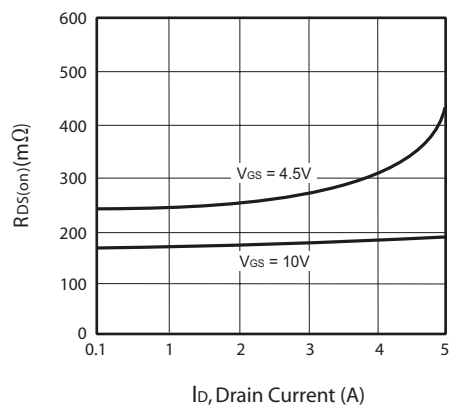


Figure 3. On-Resistance vs. Drain Current and Gate Voltage

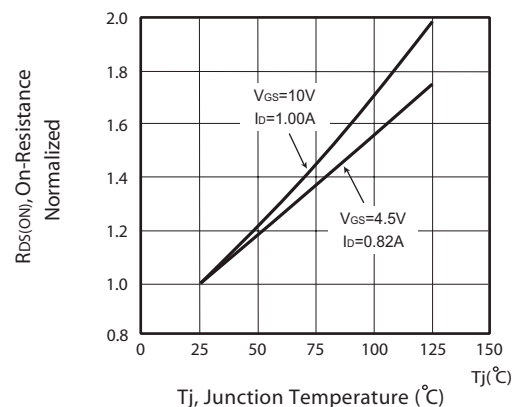


Figure 4. On-Resistance Variation with Drain Current and Temperature

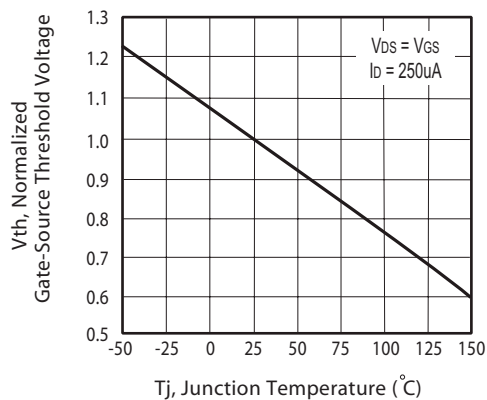


Figure 5. Gate Threshold Variation with Temperature









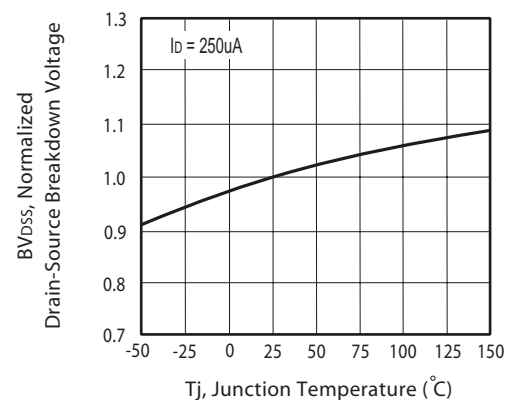


Figure 6. Breakdown Voltage Variation with Temperature

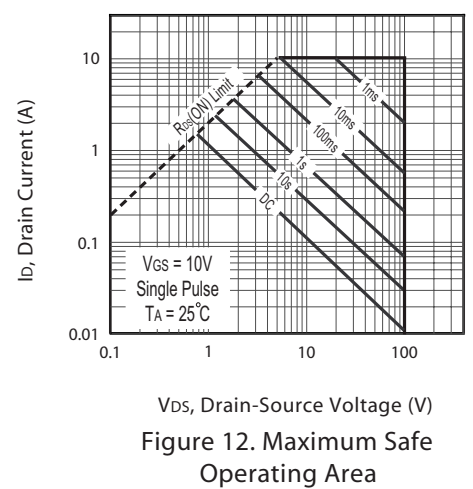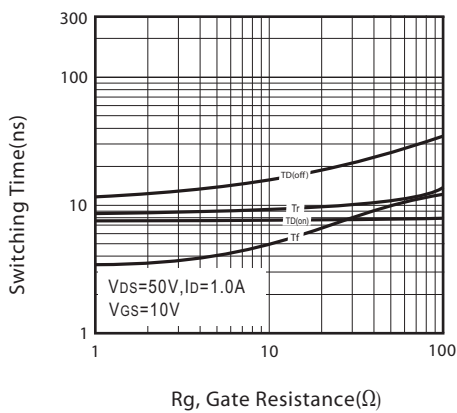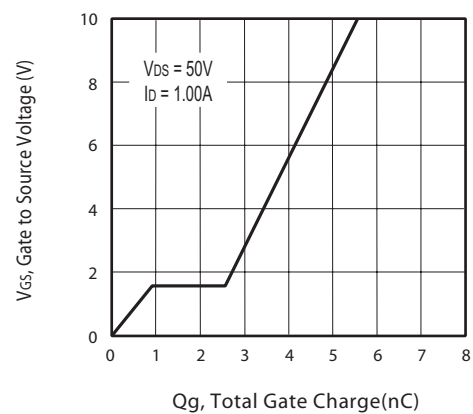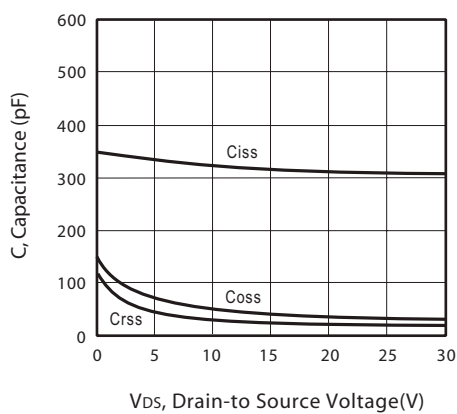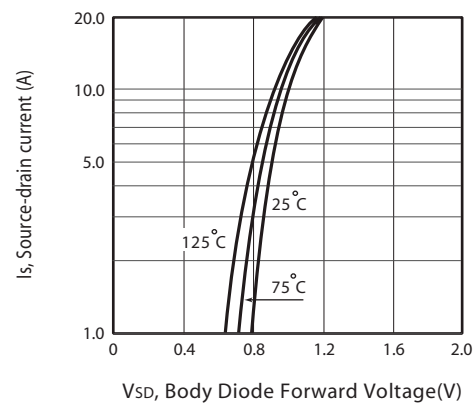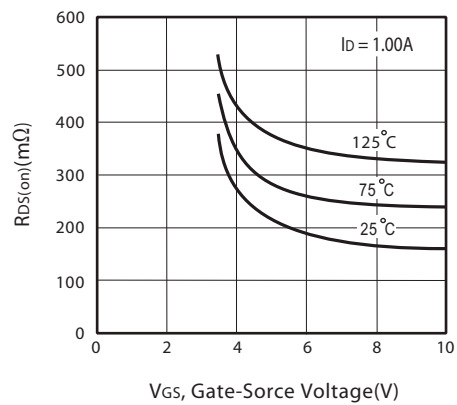

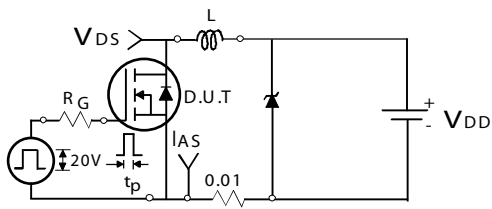

Unclamped Inductive Test Circuit
Figure 13a.

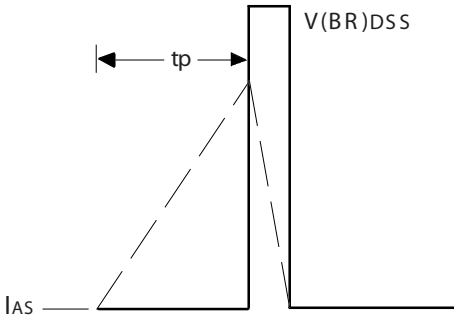

Unclamped Inductive Waveforms
Figure 13b.


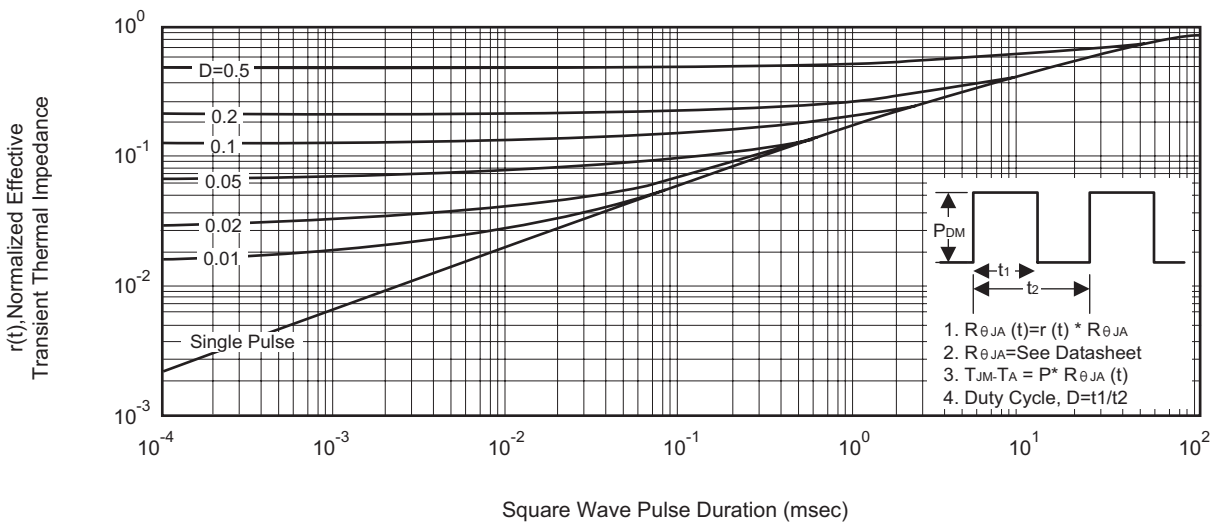


Figure 14. Normalized Thermal Transient Impedance Curve

PACKAGE OUTLINE DIMENSIONS


SOT-89

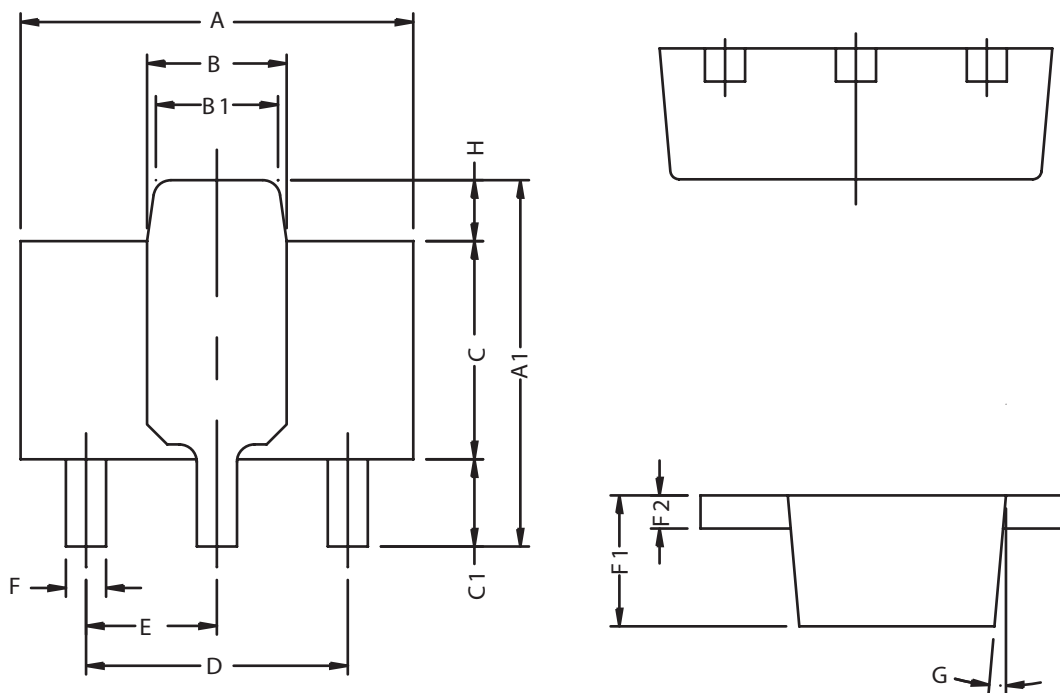

REF.	DIMENSIONS	
	Milimeters	
	MIN.	MAX.
A	4.40	4.60
A1	4.05	4.25
B	1.50	1.70
B1	1.30	1.50
C	2.40	2.60
C1	0.89	1.20
D	3.00 REF.	
E	1.50 REF.	
F	0.40	0.52
F1	1.40	1.60
F2	0.35	0.41
G	5° TYP.	
H	0.70 REF.	

SOT-89 Tape

SOT-89 Carrier Tape

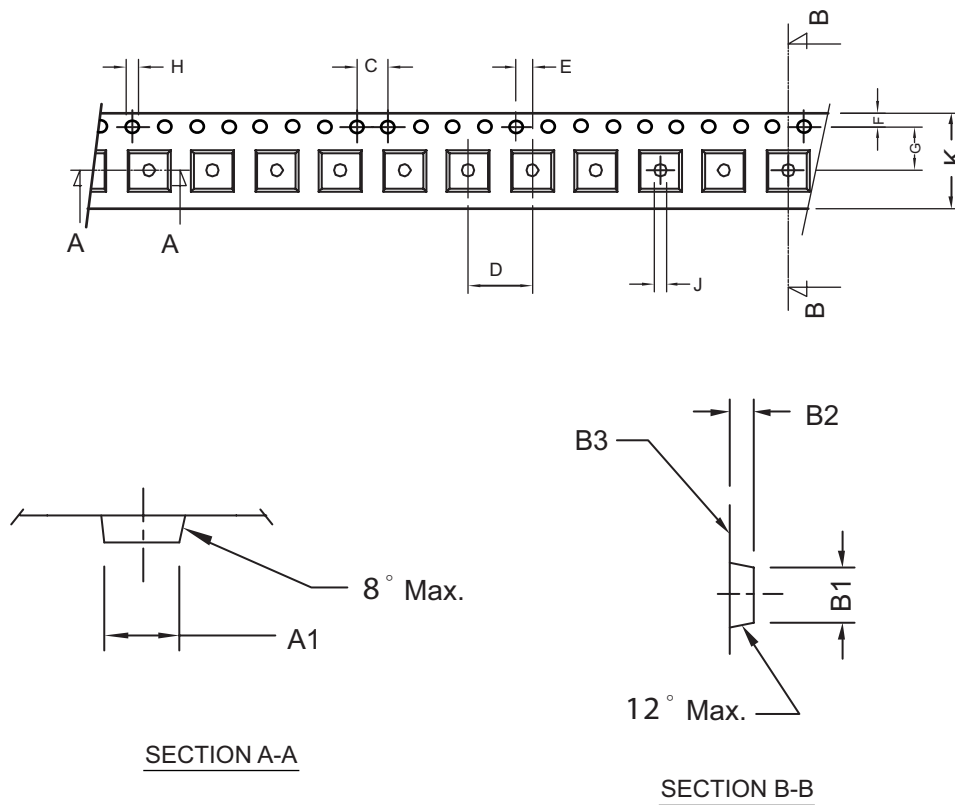

unit:mm

PACKAGE	A1	B1	B2	C	D	E	B3	F	G	H	J	K	10C
SOP 8N 150mil	4.85 ±0.10	4.45 ±0.10	1.85 ±0.10	4.0 ±0.10	8.0 ±0.10	2.0 ±0.05	0.254 ±0.02	1.75 ±0.10	5.5 ±0.05	1.50 ±0.10	1.5 ±0.25	12.0 +0.30 -0.10	40.0 ±0.20