

STN2907SF

PNP Silicon Transistor

Descriptions

- General purpose application
- Switching application


Features

- Large collector current
- Low collector saturation voltage
- Complementary pair with STN2222SF

Ordering Information

Type NO.	Marking	Package Code	
STN2907SF	GA	SOT-23F	

Outline Dimensions

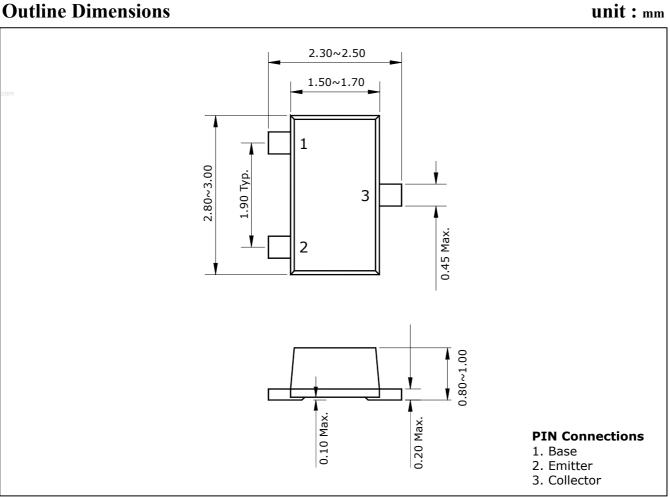

KST-2072-000

Absolute maximum ratings

(Ta=25°C)

Characteristic	Symbol	Ratings	Unit
Collector-Base voltage	V_{CBO}	-60	V
Collector-Emitter voltage	V _{CEO}	-40	V
Emitter-Base voltage	V_{EBO}	-5	V
Collector current	I_{C}	-600	mA
Collector dissipation	P _C *	350	mW
Junction temperature	T _j	150	°C
Storage temperature	T _{stg}	-55~150	°C

^{* :} Package mounted on 99.5% Alumina 10×8×0.1mm.

Electrical Characteristics

(Ta=25°C)


Characteristic	Symbol	Test Condition	Min.	Тур.	Max.	Unit
Collector-Base breakdown voltage	BV _{CBO}	$I_C = -10 \mu A, I_E = 0$	-60	1	-	V
Collector-Emitter breakdown voltage	BV _{CEO}	$I_C=-10$ mA, $I_B=0$	-40	-	-	V
Emitter-Base breakdown voltage	BV _{EBO}	$I_E = -10 \mu A, I_C = 0$	-5	-	-	V
Collector cut-off current	I_{CBO}	V_{CB} =-60V, I_{E} =0	-	-	-10	nA
DC current gain	h _{FE}	V_{CE} =-10V, I_{C} =-10mA	75	1	1	-
Collector-Emitter saturation voltage	$V_{CE(sat)}$	I _C =-150mA, I _B =-15mA	-	-	-0.4	V
Transistor frequency	f _T	V _{CE} =-20V, I _C =-20mA	250	-	-	MHz
Collector output capacitance	C _{ob}	V_{CB} =-10V, I_{E} =0, f=1MHz	-	6.0	-	pF

KST-2072-000 2

Electrical Characteristic Curves

Fig. 1 P_C - T_a 500 400 300

Fig. 2 I_C - V_{BE}

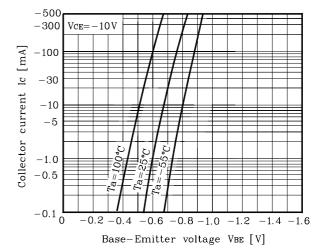

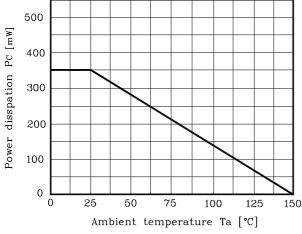


Fig. 3 I_C - V_{CE}

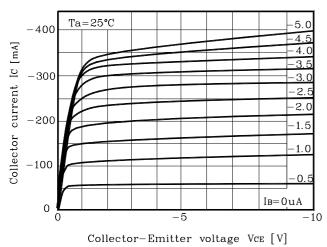


Fig. 4 $V_{CE(sat)}$ - I_C

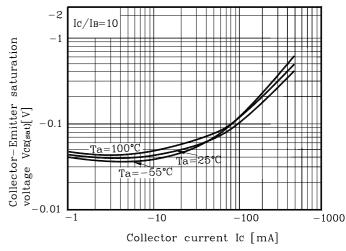


Fig. 5 h_{FE} - I_C


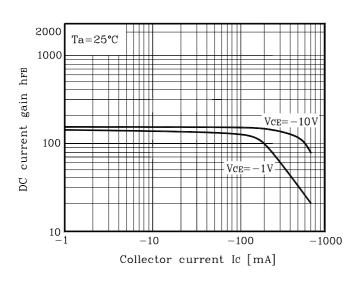


Fig. 6 h_{FE} - I_C

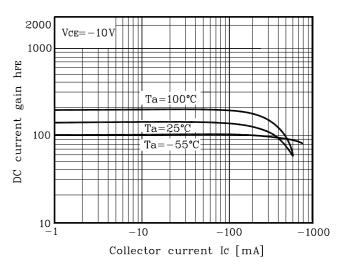

3 KST-2072-000

The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).

Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..

Specifications mentioned in this publication are subject to change without notice.

KST-2072-000 4