


DESCRIPTION

STP4931 is the dual P-Channel logic enhancement mode power field effect transistors are produced using high cell density, DMOS trench technology. This high density process is especially tailored to minimize on-state resistance. These devices are particularly suited for low voltage application, notebook computer power management and other battery powered circuits Where high-side switching.

PIN CONFIGURATION SOP-8



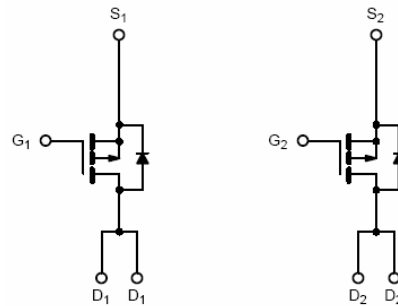
FEATURE

- -20V/-8.5A, $R_{DS(ON)} = 20m\Omega$ (Typ.) @ $V_{GS} = -4.5V$
- -20V/-8.0A, $R_{DS(ON)} = 25m\Omega$ @ $V_{GS} = -2.5V$
- -20V/-5.0A, $R_{DS(ON)} = 35m\Omega$ @ $V_{GS} = -1.8V$
- Super high density cell design for extremely low $R_{DS(ON)}$
- Exceptional on-resistance and maximum DC current capability
- SOP-8 package design

PART MARKING SOP-8



Y: Year Code A: Process Code



**STP4931**

Dual P Channel Enhancement Mode MOSFET

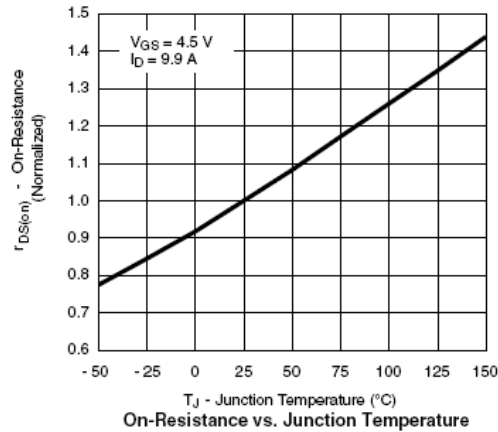
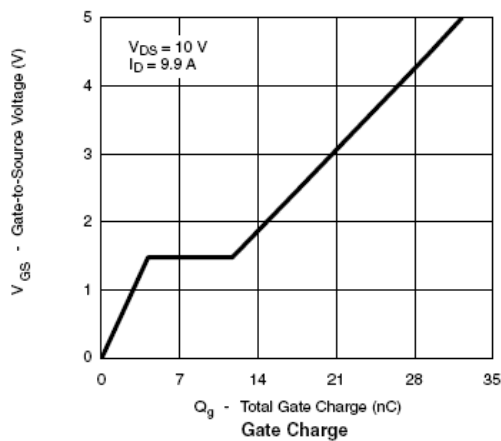
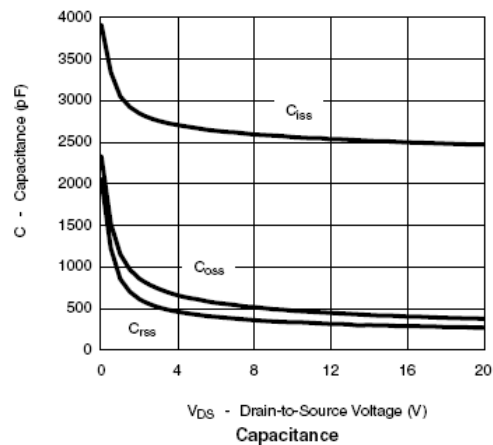
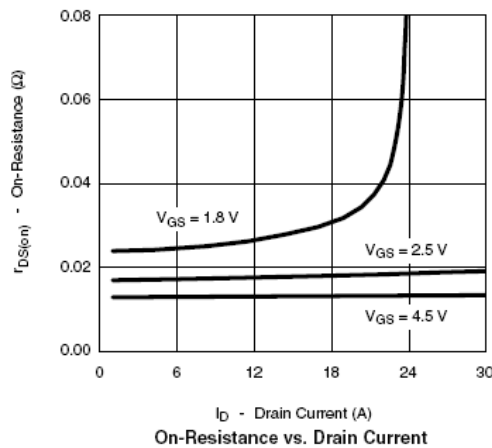
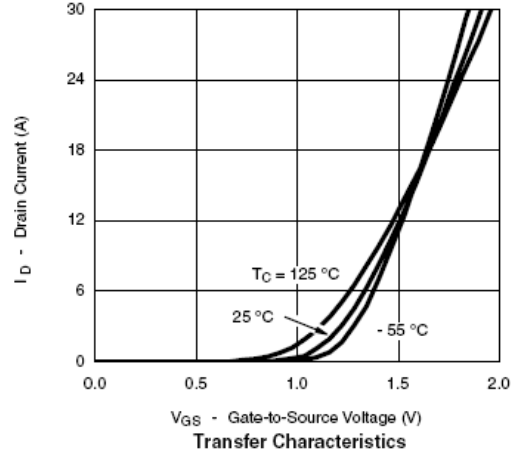
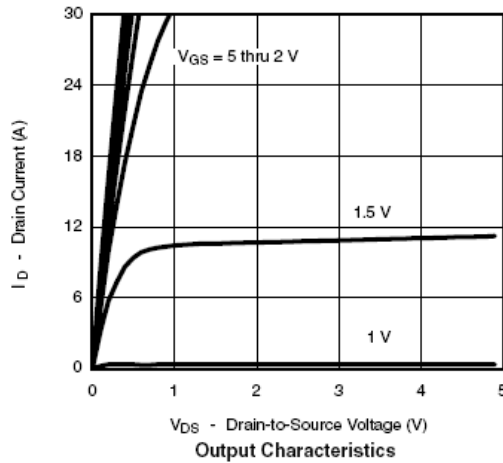
-8.5A

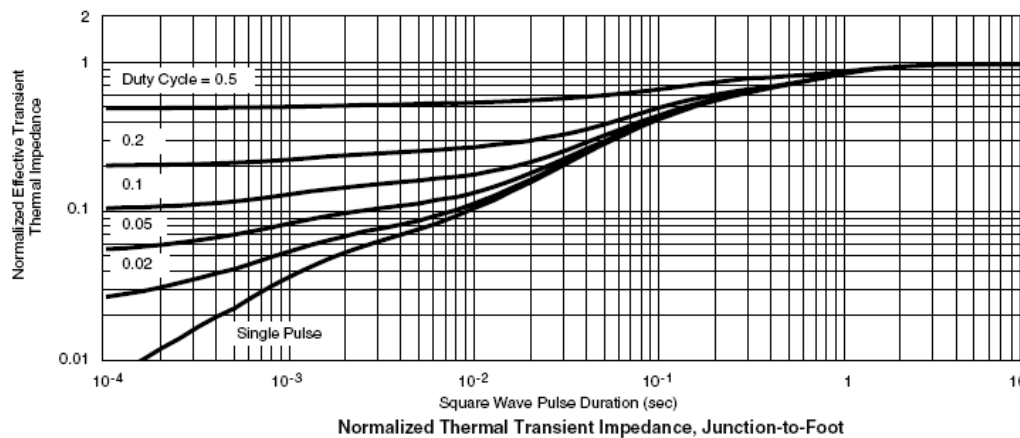
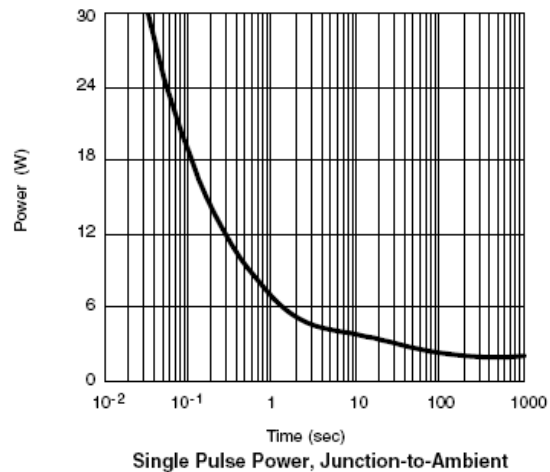
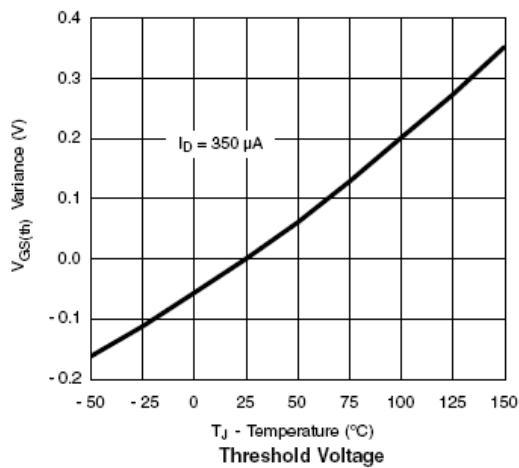
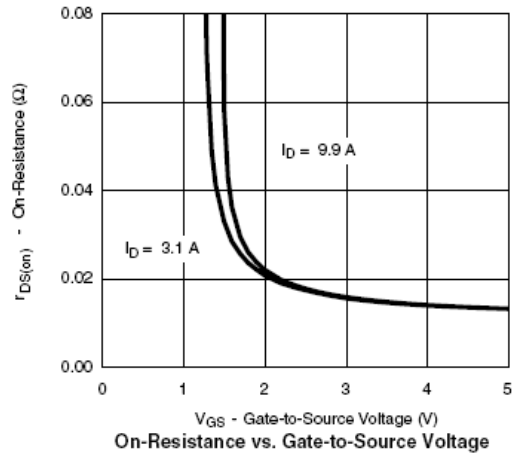
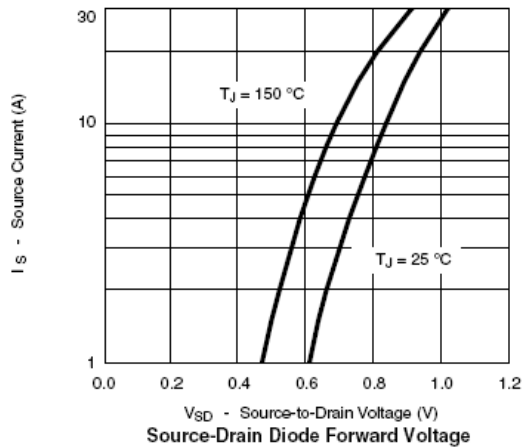
ABSOLUTE MAXIMUM RATINGS (Ta = 25°C Unless otherwise noted)

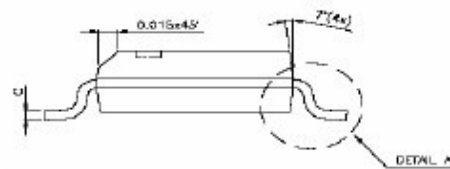
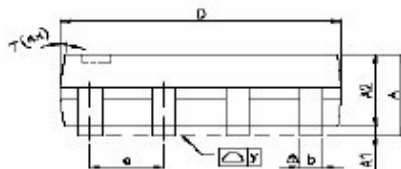

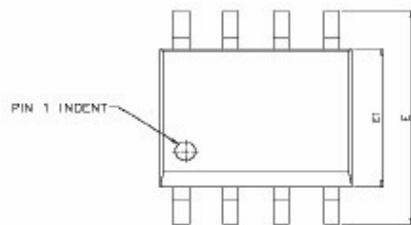
Parameter		Symbol	Typical	Unit
Drain-Source Voltage		V _{DSS}	-20	V
Gate-Source Voltage		V _{GSS}	±12	V
Continuous Drain Current (T _J =150°C)	T _A =25°C T _A =70°C	I _D	-8.5 -7.0	A
Pulsed Drain Current		I _{DM}	-30	A
Continuous Source Current (Diode Conduction)		I _S	-2.3	A
Power Dissipation	T _A =25°C T _A =70°C	P _D	2.8 1.8	W
Operation Junction Temperature		T _J	-55/150	°C
Storage Temperature Range		T _{STG}	-55/150	°C
Thermal Resistance-Junction to Ambient		R _{θJA}	70	°C/W

ELECTRICAL CHARACTERISTICS (Ta = 25°C Unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Static						
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS}=0V, I_D=-250\mu A$	-20			V
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=-250\ \mu A$	-0.35		-0.9	V
Gate Leakage Current	I_{GSS}	$V_{DS}=0V, V_{GS}=\pm 12V$			± 100	nA
Zero Gate Voltage Drain Current	I_{DSS} $T_J=55^{\circ}C$	$V_{DS}=-16V, V_{GS}=0V$			-1	uA
		$V_{DS}=-20V, V_{GS}=0V$			-10	
On-State Drain Current	$I_{D(on)}$	$V_{DS}=-5V, V_{GS}=4.5V$	-25			A
Drain-source On-Resistance	$R_{DS(on)}$	$V_{GS}=-4.5V, I_D=-8.5A$ $V_{GS}=-2.5V, I_D=-8.0A$ $V_{GS}=-1.8V, I_D=-5.0A$		0.016 0.020 0.028	0.020 0.025 0.035	Ω
Forward Tran Conductance	g_{fs}	$V_{DS}=-5.0V, I_D=-10A$		36		S
Diode Forward Voltage	V_{SD}	$I_S=-2.5A, V_{GS}=0V$		-0.8	-1.2	V
Dynamic						
Total Gate Charge	Q_g	$V_{DS}=-10V, V_{GS}=-5.0V$ $I_D=-10A$		30	45	nC
Gate-Source Charge	Q_{gs}			4.5		
Gate-Drain Charge	Q_{gd}			8.0		
Input Capacitance	C_{iss}	$V_{DS}=-15V, V_{GS}=0V$ $f=1MHz$		2670		pF
Output Capacitance	C_{oss}			520		
Reverse TransferCapacitance	C_{rss}			480		
Turn-On Time	$t_{d(on)}^{tr}$	$V_{DD}=-10V, R_L=15\Omega$ $I_D=-1.0A, V_{GEN}=-4.5V$ $R_G=6\Omega$		25	40	nS
				45	70	
Turn-Off Time	$t_{d(off)}^{tf}$			145	240	
				70	115	

TYPICAL CHARACTERISTICS (25°C Unless Note)


TYPICAL CHARACTERISTICS (25°C Unless Note)


SOP-8 PACKAGE OUTLINE


SYMBOLS	DIMENSIONS IN MILLIMETERS			DIMENSIONS IN INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	1.47	1.60	1.73	0.058	0.063	0.068
A1	0.10	—	0.25	0.004	—	0.010
A2	—	1.45	—	—	0.057	—
b	0.33	0.41	0.51	0.013	0.016	0.020
C	0.19	0.20	0.25	0.0075	0.008	0.0098
D	4.80	4.85	4.95	0.189	0.191	0.195
E	5.80	6.00	6.20	0.228	0.236	0.244
E1	3.80	3.90	4.00	0.150	0.154	0.157
e	—	1.27	—	—	0.050	—
L	0.38	0.71	1.27	0.015	0.028	0.050
Δy	—	—	0.076	—	—	0.003
θ	0°	—	8°	0°	—	8°