

*Shanghai SVA - NEC Liquid Crystal Display Co., Ltd.*

**TFT COLOR LCD MODULE  
(COMMON)**

**SVA156WX1-01TB**

**39.5cm(15.6 Type)**

**WXGA+**

**LVDS Interface (1port)**

**DATA SHEET**

(Version 5.0)


*Published by*

Product Technology Department

SVA - NEC Liquid Crystal Display Co., Ltd.

*Approved by*


*Date*



2008.8.19

*Checked by*


*Date*



2008.8.19

*Prepared by*

*Date*



2008.8.19

*Signature of customer*

*Confirmed by*

*Date*

## INTRODUCTION

### • WARRANTY

Shanghai **SVA NEC** Liquid Crystal Display Co., Ltd. (hereinafter called "SVA-NEC") warrants that this product meets the product specifications set forth in this document. If this product under normal operation is found to be non-conforming to the product specifications, and such non-conformance is promptly notified to SVA-NEC within one (1) year after the delivery date, and further such non-conformance is solely attributable to SVA-NEC, SVA-NEC shall repair the non-conforming product or replace it with a conforming one, free of charge. However, this warranty does not apply to any non-conformance that can be found easily by incoming inspections or those resulting from any one of the following:

- 1) Unauthorized or improper repair, maintenance or modification
- 2) Operation or use against specifications, instructions or warnings given by SVA-NEC
- 3) Any other causes attributable to customer

In case SVA-NEC repairs or replaces a product after the one (1)-year warranty period, SVA-NEC shall be entitled to charge for such repair or replacement. Those replaced parts shall be covered with six (6)-month warranty period from the replacement day. Non-conforming products may be replaced with substitutes instead of repair when the manufacture of this product has been terminated.

**EXCEPT AS EXPRESSLY SET FORTH HEREIN, SVA-NEC DISCLAIMS ANY WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, AND DISCLAIMS ANY REMEDIES.**

### • MAINTENANCE

The specifications of maintenance parts may be partially changed within equivalent quality or better. In this product, SVA-NEC will not accept to maintain for only mounting parts on circuit board (e.g. connector, fuse, capacitor, resistor, etc.) and only backlight conformation parts (e.g. reflector sheet, light guide plate, etc.).

If SVA-NEC is planning discontinuation for this product, SVA-NEC shall inform it to customers in six (6)-months advance from the issued date of official agreements. In addition, after product discontinuation, SVA-NEC may replace substitutes instead of maintenance parts with whole product.

### • CHANGE CONTROL

For the purpose of product improvement, this product design may be changed for specifications, appearance, parts, circuits and so on. In case a design change is affected on the product specifications, SVA-NEC shall inform it to customers in advance.

### • HANDLING OF DOUBTFUL POINTS

Any question arising out of, or in connection with, this SPECIFICATION or any matter not stipulated herein will be settled each time upon consultation between both parties.

## CONTENTS

INTRODUCTION .....	2
CONTENTS .....	3
1. OUTLINE .....	4
1.1 STRUCTURE AND PRINCIPLE .....	4
1.2 APPLICATIONS .....	4
1.3 FEATURES .....	4
2. GENERAL INFORMATION .....	5
3. BLOCK DIAGRAM .....	6
4. DETAILED SPECIFICATION .....	7
4.1 MECHANICAL SPECIFICATIONS .....	7
4.2 ABSOLUTE MAXIMUM RATINGS .....	7
4.3 ELECTRICAL CHARACTERISTICS .....	8
4.4 POWER SUPPLY VOLTAGE SEQUENCE AND RIPPLE .....	10
4.5 INTERFACE AND CONNECTOR PIN ASSIGNMENT .....	12
4.6 LVDS I/F DATA CHART .....	14
4.7 DISPLAY COLORS AND INPUT DATA SINGALS .....	15
4.8 INTERFACE TIMMING .....	16
4.9 OPTICS .....	18
5. RELIABILITYS TESTS .....	21
6. ESTIMATED LUMINANCE LIFETIME .....	22
7. MARKINGS .....	23
7.1 PRODUCT LABEL .....	23
7.2 BARCODE LABEL .....	23
7.3 OTHER MARKINGS .....	23
7.4 INDICATION LOCATIONS .....	24
8. PACKING, TRANSPORTATION AND DELIVERY .....	25
8.1 PACKING .....	25
8.2 INSPECTION RECORD SHEET .....	25
8.3 TRANSPORTATION .....	25
8.4 SIZE AND WEIGHT FOR PACKING BOX .....	25
8.5 OUTLINE FIGURE FOR PACKING .....	26
9. PRECAUTIONS .....	28
9.1 MEANING OF CUTION SIGNS .....	28
9.2 CAUTIONS .....	28
9.3 ATTENTIONS .....	28
10. OUTDRAWING .....	30

## 1. OUTLINE

### 1.1 STRUCTURE AND PRINCIPLE

SVA156WX1-01TB module is composed of the amorphous silicon thin film transistor liquid crystal display (a-Si TFT LCD) panel structure with driver LSIs for driving the TFT (Thin Film Transistor) array and a backlight.

The a-Si TFT LCD panel structure is injected liquid crystal material into a narrow gap between the TFT array glass substrate and a color-filter glass substrate.

Color (Red, Green, Blue) data signals from a host system (e.g. PC, signal generator, etc.) are modulated into best form for active matrix system by a signal processing board, and sent to the driver LSIs which drive the individual TFT arrays.

The TFT array as an electro-optical switch regulates the amount of transmitted light from the backlight assembly, when it is controlled by data signals. Color images are created by regulating the amount of transmitted light through the TFT array of red, green and blue dots.

### 1.2 APPLICATIONS

- Small Monitor / TV application


### 1.3 FEATURES

- a-Si TFT active matrix
- LVDS interface
- R.G.B input 8bit, 16.77 millions colors (6bit+Hi-FRC)
- Resolution: (1,366×768 pixels)
- High contrast ratio: 500:1
- Module size: 363.8(H) × 215.9(V) × 14.3(D)mm
- High response time (Ton+Toff=8 ms)
- High gamut: (against NTSC 60%typ.)
- Edge light type backlight (2 CCFL lamps)
- Inverter less
- RoHS compliance
- TCO'03 compliance

## 2. GENERAL INFORMATION

<b>Display area</b>	344.232 (W) x 193.536 (H) mm (typ.)
<b>Diagonal size of display</b>	39.5cm (15.6 inches)
<b>Drive system</b>	a-Si TFT active matrix
<b>Display color</b>	16,777,216 colors (6bit+FRC)
<b>Pixel</b>	1,366 (H) x 768 (V) pixels
<b>Pixel arrangement</b>	RGB (Red dot、Green dot、Blue dot) vertical stripe
<b>Dot pitch</b>	0.084(W) x 0.252 (H) mm
<b>Pixel pitch</b>	0.252 (W) x 0.252 (H) mm
<b>Module size</b>	363.8±0.5(W) x 215.9±0.5(H) x 14.3 (D) mm (typ.)
<b>Weight</b>	1300g (max.)
<b>Contrast ratio</b>	500:1 (typ.)
<b>Viewing angle</b> (At the contrast ratio 10: 1)	<ul style="list-style-type: none"> <li>• Horizontal: 45°/45°(L/R);</li> <li>• Vertical: 20°/45° (U/D)</li> </ul>
<b>Designed viewing direction</b>	• Viewing angle with optimum grayscale ( $\gamma=2.2$ ): normal axis
<b>Color gamut</b>	At LCD panel center 60 % (typ.) [against NTSC color space]
<b>Response time</b>	$T_{on}$ (white 90% → black 10%) + $T_{off}$ (black 10% → white 90%) 8ms (typ.)
<b>Luminance</b>	At IBL = 7mAmps / lamp 250cd/m <sup>2</sup> (typ.)
<b>Transmissive Mode</b>	Normally White
<b>Surface treatment</b>	AG type
<b>Signal system</b>	LVDS 1port [ RGB :8-bit, Dot clock (CLK), Data enable (DE)]
<b>Power supply voltage</b>	LCD panel signal processing board: 5V
<b>Backlight</b>	Edge light type: 2 cold cathode fluorescent lamps
<b>Power consumption</b>	At IBL=7mAmps / lamp and checkered flag pattern (12)W (Typ.)

### 3. BLOCK DIAGRAM

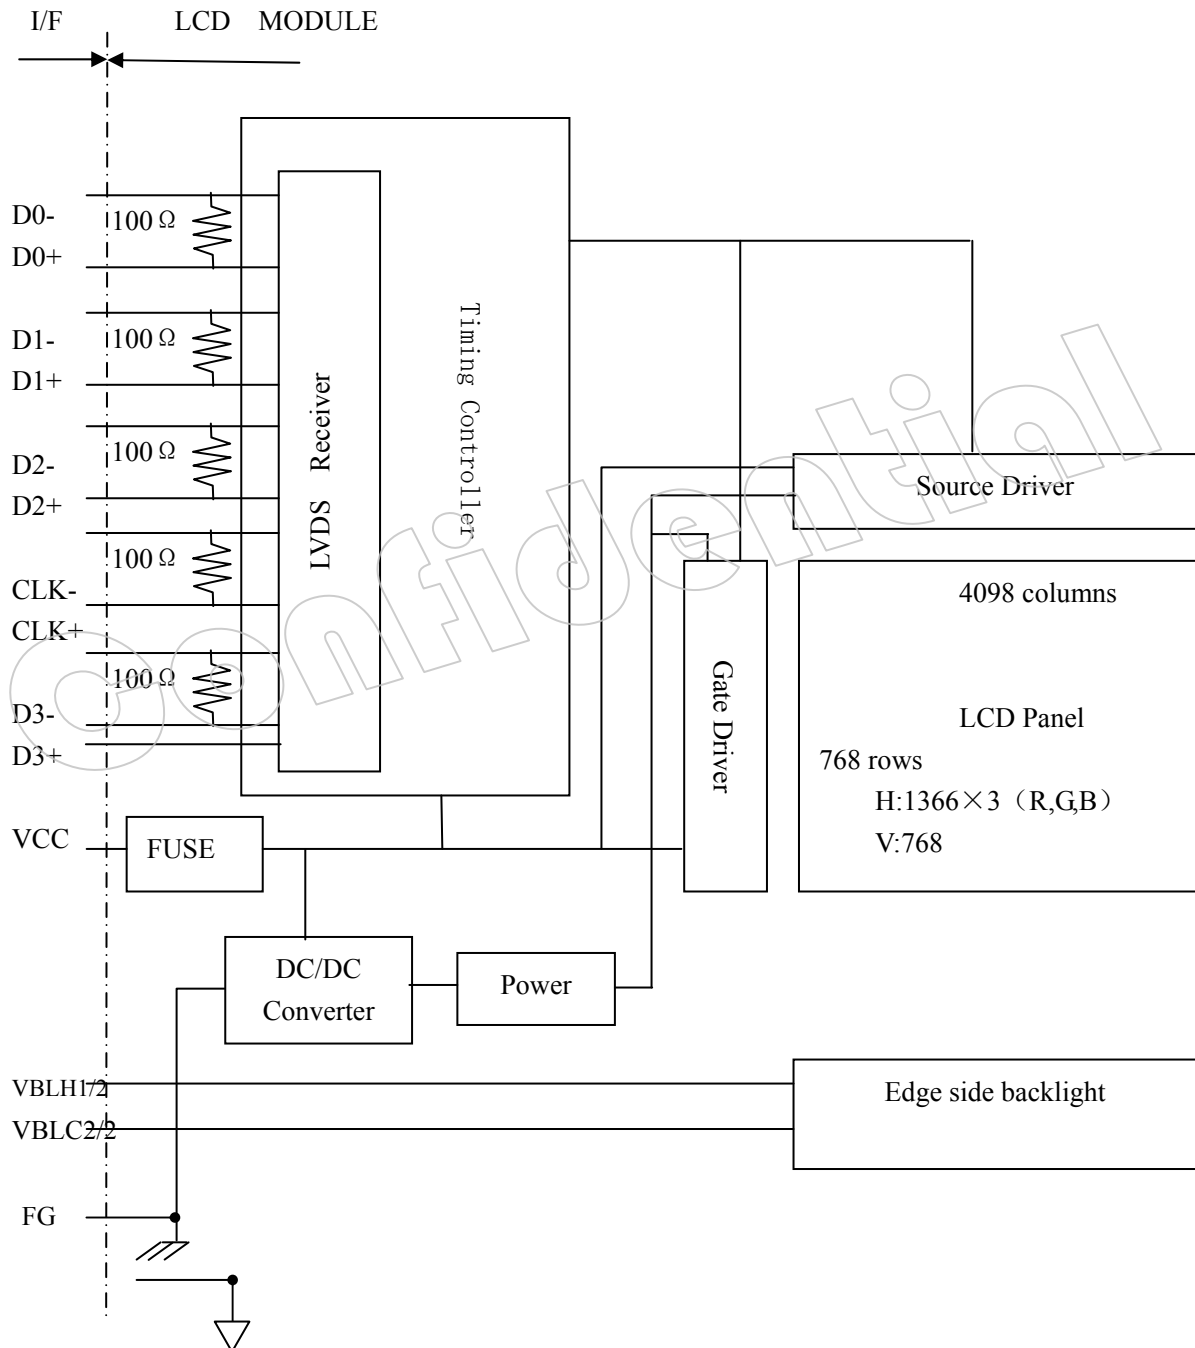

Note: System ground(GND), FG (Frame ground) in the product should be connected together in customer equipment.

## 4. DETAILED SPECIFICATION

### 4.1 MECHANICAL SPECIFICATIONS

Parameter	Specification	Unit
Module size	363.8±0.5 (W) ×215.9±0.5 (H) ×14.3 (D)	mm
Display area	344.232 (W) x 193.536 (H) (typ.), [39.5cm (15.6 inches)]	mm
Display dot number	1366×3(H) ×768(V)	-
Pixel pitch	0.252(H)×0.252(V)	mm
Dot pitch	0.084(H) ×0.252(V)	mm
Color arrangement	RGB (Red dot、 Green dot、 Blue dot) vertical stripe	-
Display color	16,777,216(6bit+Hi FRC)	color
Weight	1300 (max.)	g

### 4.2 ABSOLUTE MAXIMUM RATINGS

Parameter		Symbol	Rating	Unit	Remarks
Power supply voltage	LCD panel signal board	VCC	-0.3 ~ +6.0	V	Ta = 25℃
Input voltage for signals	Display signals Note1	Vi	-0.3 ~ +3.2	V	Ta = 25℃
Storage temperature		Tst	-20 ~ +60	℃	-
Operating temperature	Front surface	TopF	0 ~ +50	℃	Note2
	Rear surface	TopR	0 ~ +55	℃	Note3
Relative humidity Note4		RH	≤ 90	%	Ta ≤ 40℃
			≤ 85	%	40 < Ta ≤ 50℃
Absolute humidity		AH	≤ 70 Note5	g/m <sup>3</sup>	Ta > 50℃
Operating altitude		-	≤ 4,850	m	0℃ ≤ Ta ≤ 55℃
Storage altitude		-	≤ 13,600	m	-20℃ ≤ Ta ≤ 60℃

Note1: Display signals are D0+/-, D1+/-, D2+/-, D3+/- and CK+/-.

Note2: Measured at center of LCD panel surface (including self-heat)

Note3: Measured at center of LCD module's rear shield surface (including self-heat)

Note4: No condensation

Note5: Ta = 50℃, RH = 85%

### 4.3 ELECTRICAL CHARACTERISTICS

#### 4.3.1 Driving for LCD panel signal processing board


Parameter	Symbol	min.	typ.	max.	Unit	Remarks
Power supply voltage	VCC	4.5	5.0	5.5	V	-
Power supply current	ICC	-	400※1	(600) ※2	mA	at VCC = 5.0V
Permissible ripple voltage	VRP	-	-	100	mV	For VCC
Differential input threshold voltage for LVDS receiver	Low	VTL	-100		mV	at VCM = 1.25V ※3
	High	VTH	-	100	mV	
Input voltage width for LVDS receiver	Vi	0		2.5	V	-
Rush current	I <sub>rush</sub>	-	-	2.0	A	Note1.

※1: Checkered flag pattern (EIAJ ED-2522);


※2: 2H1V dot inverse pattern

※3: Common mode voltage for LVDS receiver

Note1.Measurement Conditions:

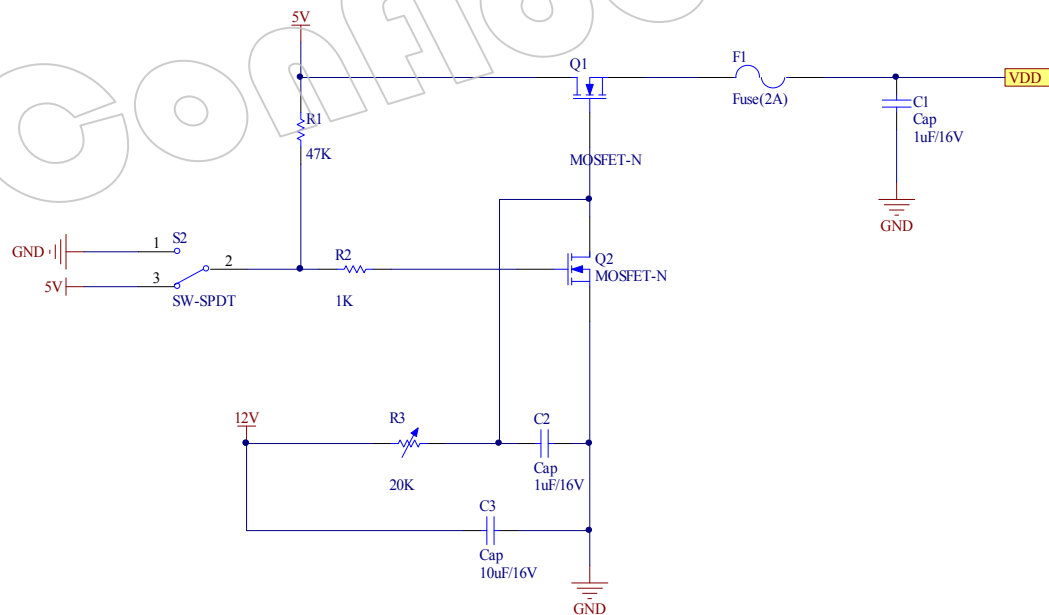

**Vcc rising time is 470μs**

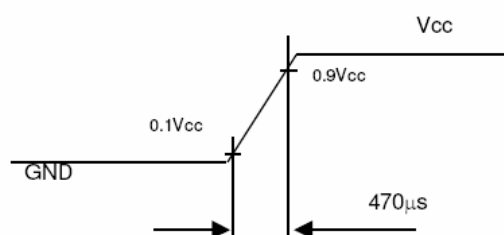



**4.3.2 Driving for backlight lamp**


(Ta=25°C) Note1

Parameter	Symbol	min.	typ.	max.	Unit	Remarks
Lamp voltage	VBLH	585	650	715	Vrms	Note2、 Note3
Lamp current	IBL	(3.0)	7.0	8.0	mA <sub>rms</sub>	Note3
Lamp starting voltage (discharge stabilization voltage)	Vs	-	-	1490	Vrms	Ta = 25°C Note2、 Note3
		-	-	1520	Vrms	Ta =0°C Note2、 3
Lamp oscillation frequency	FO	50	55	60	kHz	Note4

Note1: The backlight of this product is made up of 2-piece lamp. The specification above is only for one lamp.

Note2: The voltage timing cycle of each lamp should be set as the same phase. [Vs] and [VBLH] is the voltage between the high port and low port, the value is the characteristic of lamp. The starting voltage of inverter should be higher than the value. The possibility of not lighting exists by the lower voltage, so the suitable voltage should be considered by the test.

Note3: The asymmetric ratio of working waveform for lamps (Lamp voltage peak ratio, Lamp current peak ratio and waveform area ratio) should be less than 5% (See the following figure). If the waveform is asymmetric, DC (Direct current) element applies into the lamp. In this case, a lamp lifetime may be shortened, because a distribution of a lamp enclosure substance inclines toward one side between low voltage terminal (Cold terminal) and high voltage terminal (Hot terminal).

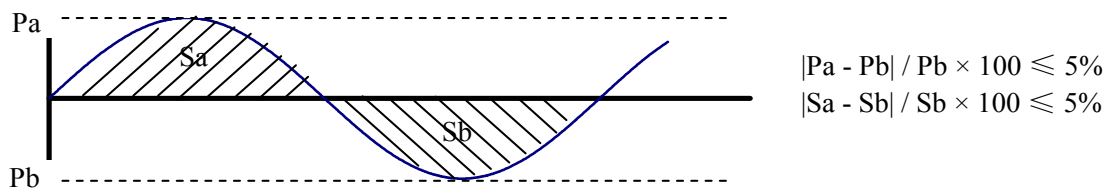

Pa: Supply voltage/current peak for positive, Pb: Supply voltage/current peak for negative

Sa: Waveform space for positive part, Sb: Waveform space for negative part

Note4: In case "FO" is not the recommended value, beat noise may display on the screen, because of interference between "FO" and "1/th". Recommended value of "FO" is as following.


$$FO = 1/4 \times 1/th \times (2n-1)$$

Th: Horizontal signal period(See "4. 8.1 Timing characteristics".)

n: Natural number (1, 2, 3 .....)

## 4.4 POWER SUPPLY VOLTAGE SEQUENCE AND RIPPLE

### 4.4.1 Power supply voltage sequence

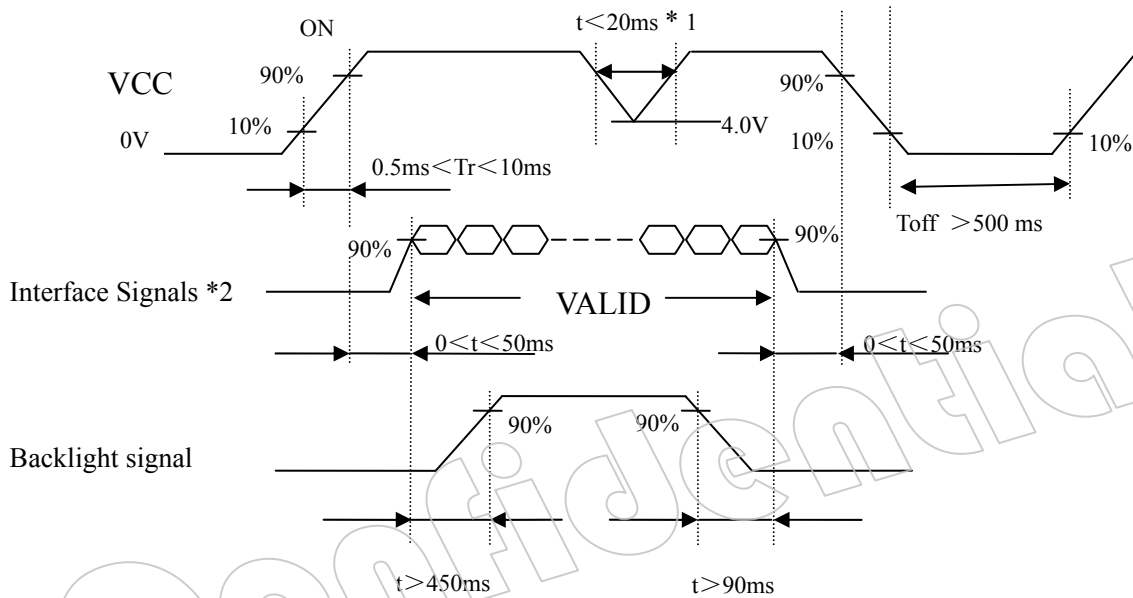

\*1: VCC should be above 4.0 V while VCC ON period.

\*2 :The signal line is not connected with the module, at the end of cable the terminal resistor of  $100\Omega$  should be added.

Note1: In terms of voltage variation (voltage drop) while VCC rising edge is below 4.5 V, a protection circuit may work, and then this product may not work.

Note2: If some of interface signals of this product are cut while this product is working, even if the signal input to it once again, it might not work normally. If customer stops the interface signals, they should cut VCC.

Note3: The backlight power supply voltage should be inputted within the valid period of interface signals, in order to avoid unstable data display.

### 4.4.2 Power supply voltage ripple


This product works, even if the ripple voltage levels are beyond the permissible values as the following table, but there might be noise on the display image.

	VCC(5V to drive the panel)
Ripple voltage	$\leq 100\text{mV}$ (Including spike noise)

4.4.3 Fuse

Parameter	Fuse		Rating	Fusing current	Remarks
	Type	Supplier			
VCC	F0603FA1500V032T	AEM	1.5 A	-	Note1
			32 V		

4.4.4 Connectors for power supply and signals

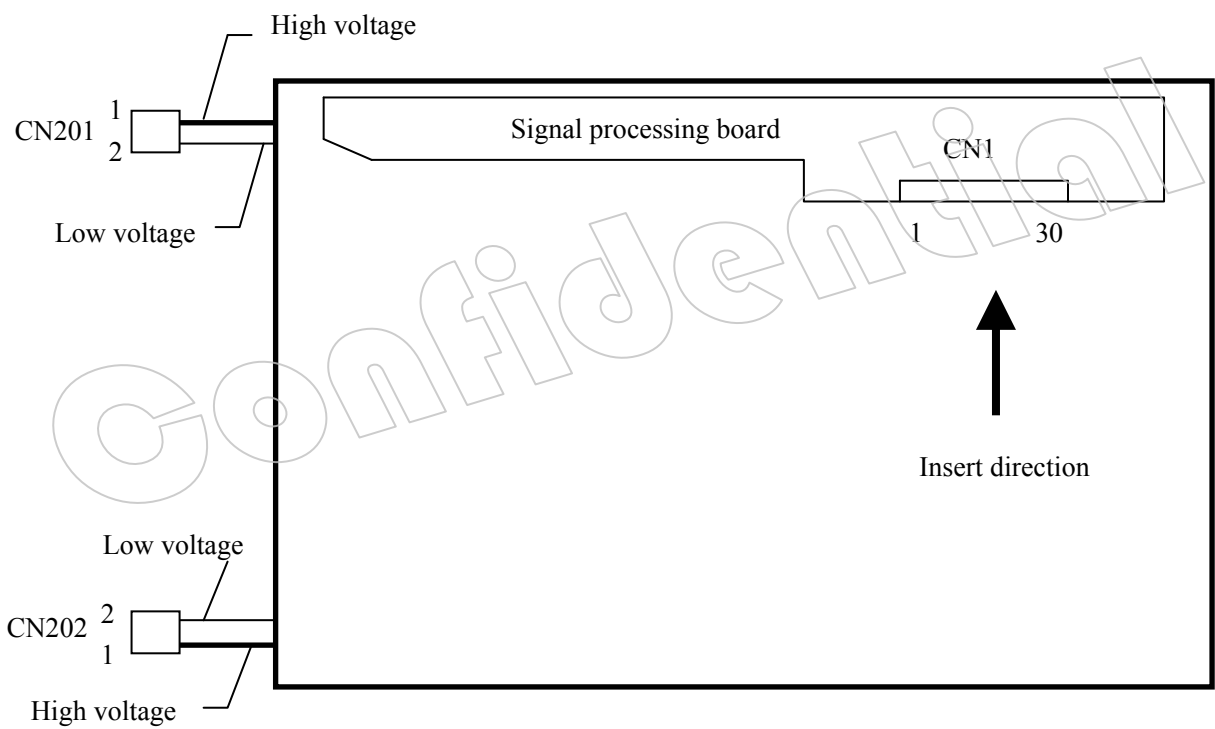

## 4.5 INTERFACE AND CONNECTOR PIN ASSIGNMENT


CN1:FI-X30SSL-HF or equivalent

Pin No.	Symbol	Description
1	NC	Not connection
2	NC	Not connection
3	NC	Not connection
4	GND	Ground
5	RX0-	Negative LVDS differential data input. Channel 0
6	RX0+	Positive LVDS differential data input. Channel 0
7	GND	Ground
8	RX1-	Negative LVDS differential data input. Channel 1
9	RX1+	Positive LVDS differential data input. Channel 1
10	GND	Ground
11	RX2-	Negative LVDS differential data input. Channel 2
12	RX2+	Positive LVDS differential data input. Channel 2
13	GND	Ground
14	RXCLK-	Negative LVDS differential clock input.
15	RXCLK+	Positive LVDS differential clock input.
16	GND	Ground
17	RX3-	Negative LVDS differential data input. Channel 3
18	RX3+	Positive LVDS differential data input. Channel 3
19	GND	Ground
20	NC	Not connection
21	NC	Not connection
22	NC	Not connection
23	GND	Ground
24	GND	Ground
25	GND	Ground
26	VCC	+5.0V power supply
27	VCC	+5.0V power supply
28	VCC	+5.0V power supply
29	VCC	+5.0V power supply
30	VCC	+5.0V power supply

SN-SA-A0053-05-E

13/33

CN1: The inserting side is as follows

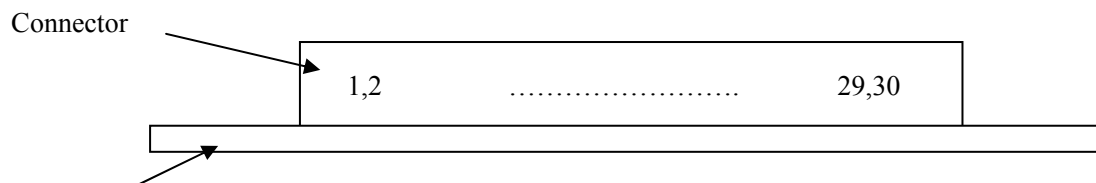

Printed wiring board

CN201:(Yeonho)3500011HS-02L/Locking Type or Equivalent

Adaptable Socket


Pin No.	Signal name	Function
1	VH1	High voltage input terminal for upper lamp(Cable color: Pink)
2	VL1	Low voltage input terminal for upper lamp(Cable color: White)

CN202:(Yeonho)3500011HS-02L/Locking Type or Equivalent

Adaptable Socket

Pin No.	Signal name	Function
1	VH2	High voltage input terminal for upper lamp(Cable color: Pink)
2	VL2	Low voltage input terminal for upper lamp(Cable color: White)

## 4.6 LVDS I/F DATA CHART

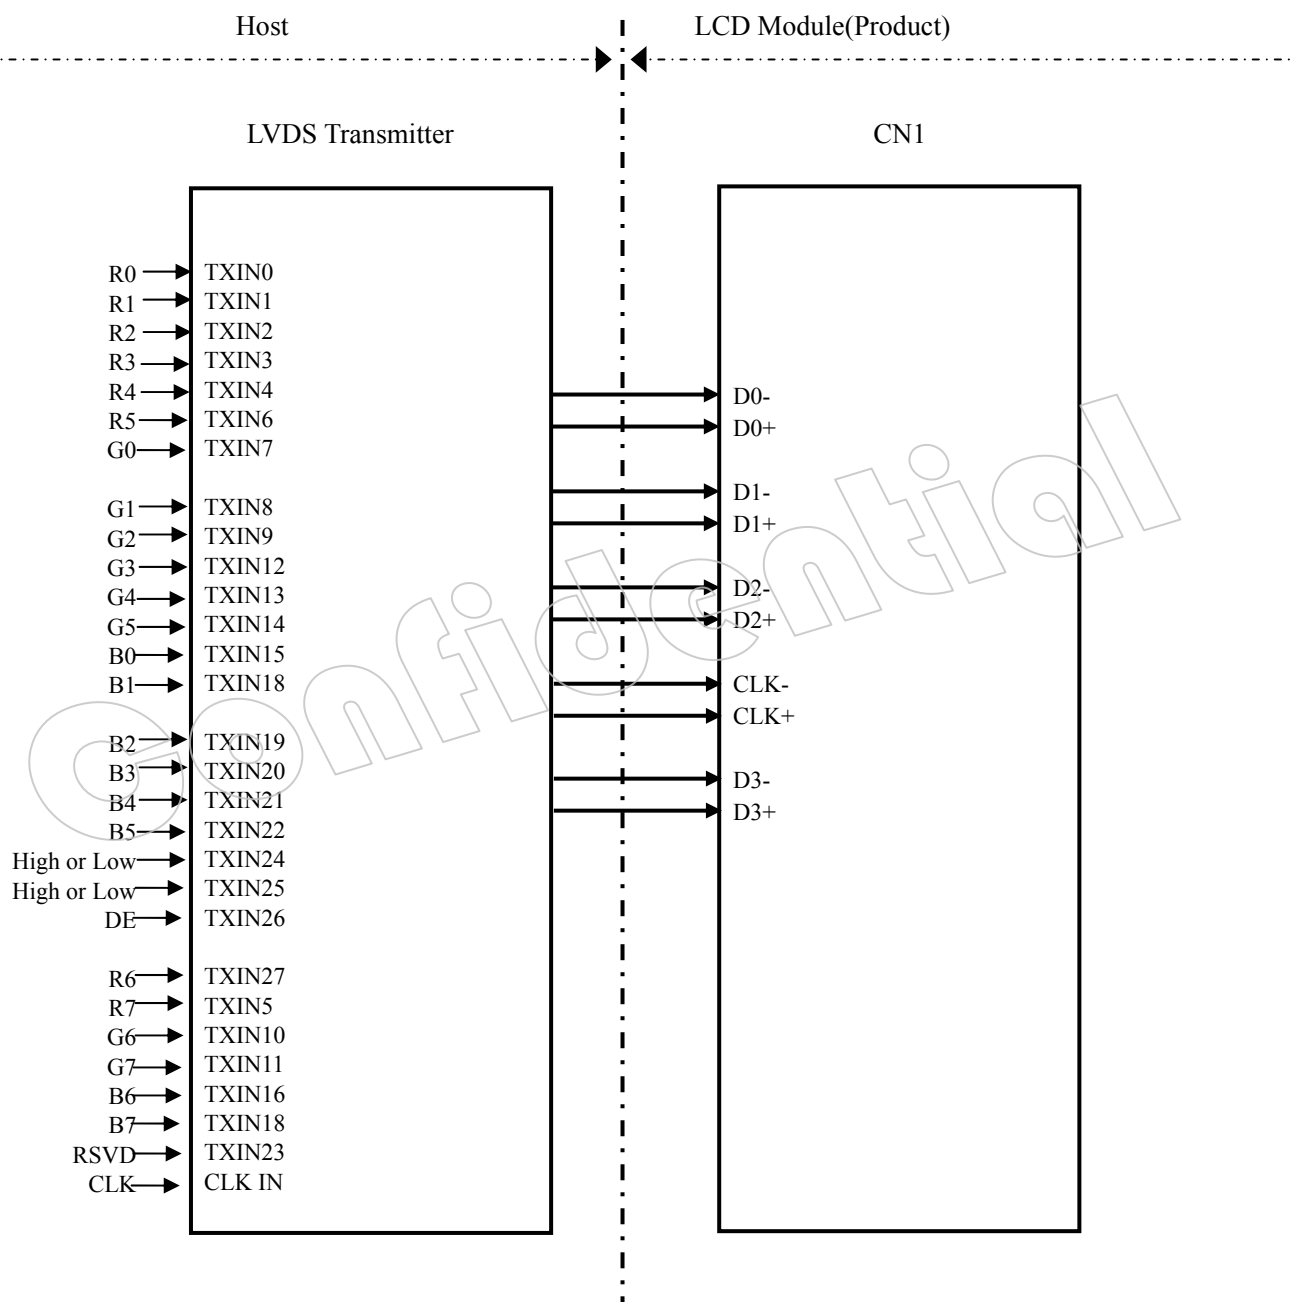

## 4.7 DISPLAY COLORS AND INPUT DATA SIGNALS

This product can display in equivalent to 16,777,216 colors in 256 scales. Also the relation between display colors and input data signals is as the following table.

Display colors		Data signal (0:Low level, 1:High Level)																							
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0
Basic Color	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Red	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Magenta	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Green	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	Cyan	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Red grayscale	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Dark ↑ ↓ Bright	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
		0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Red	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Green grayscale	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Dark ↑ ↓ Bright	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0	
	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	
	Green	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	
	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	
Blue grayscale	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Dark ↑ ↓ Bright	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	0	1	
	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	
	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	

## 4.8 INTERFACE TIMING

### 4.8.1 Timing specification


Parameter		Symbol	min.	typ.	max.	Unit	Remarks
Clock	Frequency	1/tc	50	76	85	MHz	
		tc	-	13	-	ns	
	Rise time, Fall time	-	Refer to the timing characteristics of LVDS transmitter			ns	Note 1
	Duty	-				-	
Horizontal signals	Cycle	th	-	20.67	-	μs	48.4kHz(typ.)
			(1446)	1560	(1936)	CLK	
	Display period	thd	1366			CLK	-
Vertical signals	Cycle	tv	13.33	16.67	25.00	ms	60.0Hz(typ.)
			(778)	806	(888)	H	
	Display period	tvd	768			H	-
DE/Data	Setup time	-	Refer to the timing characteristics of LVDS transmitter			ns	Note 1
	Hold time	-				ns	
	Rise time, Fall time	-				ns	

Note1: See the data sheet of LVDS transmitter.

Recommended transmitter: DS90CF383 (National Semiconductor)



4.8.2 Input signal timing chart

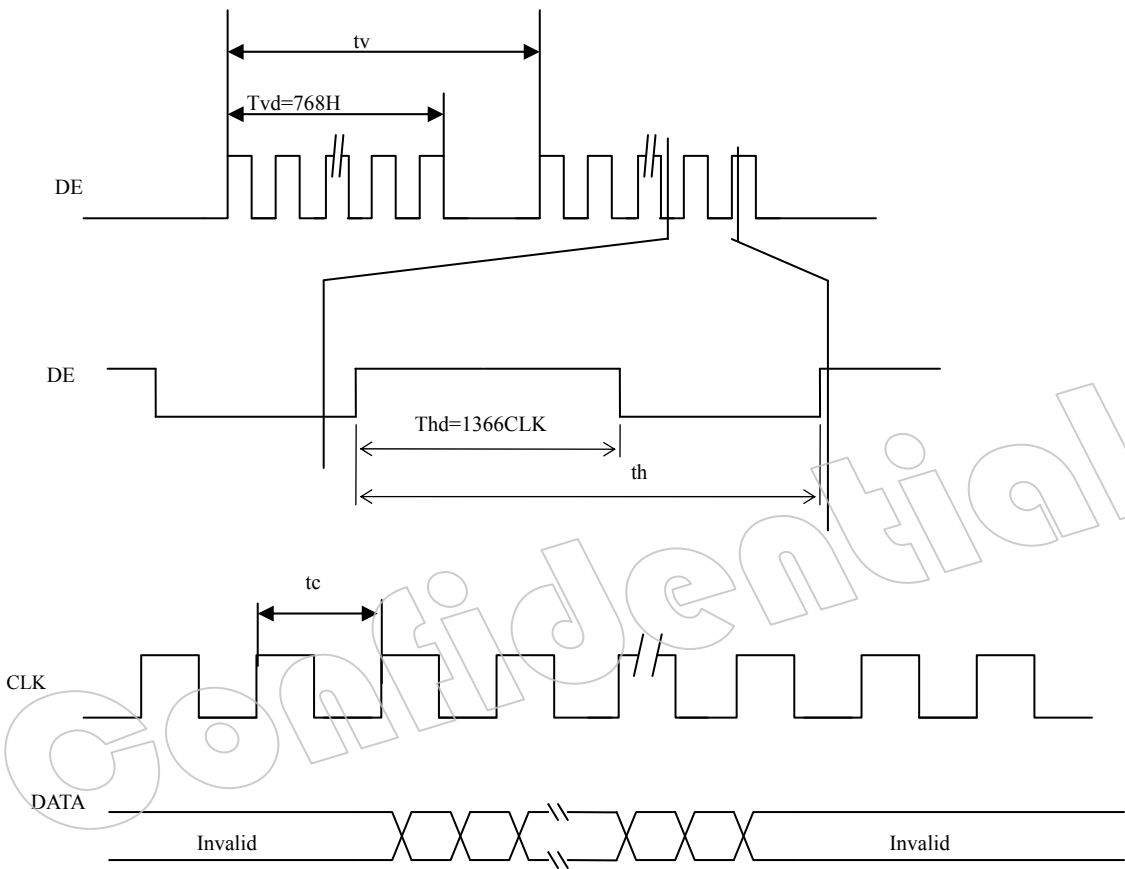

4.8.3 Pixel data alignment of display image

The following table is the coordinates per pixel

C (1, 1)									
<table><tr><td>R</td><td>G</td><td>B</td></tr></table>							R	G	B
R	G	B							
C (1, 1)	C (2, 1)	...	C (X, 1)	...	C (1365, 1)	C (1366, 1)			
C (1, 2)	C (2, 2)	...	C (X, Y)	...	C (1365, 2)	C (1366, 2)			
•	•	•	•	•	•	•			
•	•	...	•	...	•	•			
•	•	•	•	•	•	•			
C (1, Y)	C (2, Y)	...	C (X, Y)	...	C (1365, Y)	C (1366, Y)			
•	•	•	•	•	•	•			
•	•	...	•	...	•	•			
•	•	•	•	•	•	•			
C (1, 767)	C (2, 767)	...	C (X, 767)	...	C (1365, 767)	C (1366, 767)			
C (1, 768)	C (2, 768)	...	C (X, 768)	...	C (1365, 768)	C (1366, 768)			

## 4.9 OPTICS

### 4.9.1 Optical characteristics


Note1 ,Note2

Parameter Note1		Condition	Symbol	min.	typ.	max.	Unit	Remarks
Luminance		White at center $\theta R=0^{\circ}$ , $\theta L=0^{\circ}$ , $\theta U=0^{\circ}$ , $\theta D=0^{\circ}$	L	(210)	250	-	cd/ m <sup>2</sup>	-
Contrast ratio		White/Black at center $\theta R=0^{\circ}$ , $\theta L=0^{\circ}$ , $\theta U=0^{\circ}$ , $\theta D=0^{\circ}$	CR	(350)	500	-	-	Note3
Luminance uniformity		White $\theta R=0^{\circ}$ , $\theta L=0^{\circ}$ , $\theta U=0^{\circ}$ , $\theta D=0$	LU	-	1.4	(1.5)	-	Note4
Chromaticity	White	X coordinate	Wx	0.283	0.313	0.343	-	Note5
		Y coordinate	Wy	0.299	0.329	0.359	-	
	Red	X coordinate	Rx	typ- 0.03	0.637	typ+ 0.03	-	
		Y coordinate	Ry		0.340		-	
	Green	X coordinate	Gx		0.305		-	
		Y coordinate	Gy		0.580		-	
	Blue	X coordinate	Bx		0.140		-	
		Y coordinate	By		0.100		-	
Color gamut		$\theta R=0^{\circ}$ , $\theta L=0^{\circ}$ , $\theta U=0^{\circ}$ , $\theta D=0$ At center against NTSC	C	(58)	60	-	%	
Response time		White to black	Ton	-	2	(4)	ms	Note6
		Black to white	Toff	-	6	(12)	ms	Note7
		Ton+ Toff	-	-	8	(16)	ms	
Viewing angle	Right	$\theta U=0^{\circ}$ , $\theta D=0^{\circ}$ ,CR=10	$\theta R$	(40)	45	-	。	Note8
	Left	$\theta U=0^{\circ}$ , $\theta D=0^{\circ}$ ,CR=10	$\theta L$	(40)	45	-	。	
	Up	$\theta R=0^{\circ}$ , $\theta L=0^{\circ}$ ,CR=10	$\theta U$	(15)	20	-	。	
	Down	$\theta R=0^{\circ}$ , $\theta L=0^{\circ}$ ,CR=10	$\theta D$	(40)	45	-	。	

Note1: The values in upper table are only initial characteristics.

Note2: Measurement conditions are as follows.

Ta=25°C, VCC=5.0V, IBL=7.0mA rms/lamp, FO=55±5KHz, WXGA+, Vertical cycle=60.0Hz.  
Optical characteristics are measured at luminance saturation after 30minutes from working the product in the dark room. Also measurement method for luminance is as follows.

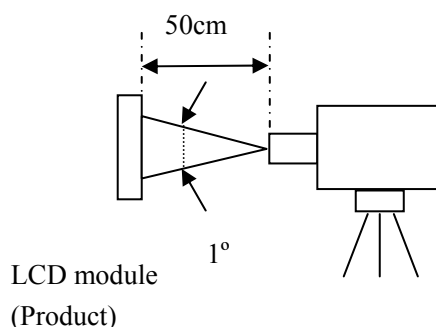

Luminance Meter (TOPCON BM-5A)  
Spectroradiometer (TOPCON SR-3)

Note 3: See “4.9.2 Definition of contrast ratio”.

Note 4: See “4.9.3 Definition of luminance uniformity”.

Note 5: CIE 1931 Chromaticity Diagram Standard.

Note 6: Product surface temperature: TopF = 33.0 °C

Note 7: See “4.9.4 Definition of response time”.

Note 8: See “4.9.5 Definition of viewing angle”.

#### 4.9.2 Definition of contrast ratio

The contrast ratio is calculated by using the following formula.


$$\text{Contrast ratio (CR)} = \frac{\text{Luminance of white screen}}{\text{Luminance of black screen}}$$

#### 4.9.3 Definition of luminance uniformity

The luminance uniformity is calculated by using the following formula.


$$\text{Luminance uniformity (LU)} = \frac{\text{Maximum luminance from (1) to (13)}}{\text{Minimum luminance from (1) to (13)}}$$

The luminance is measured at near the 13 points shown below.

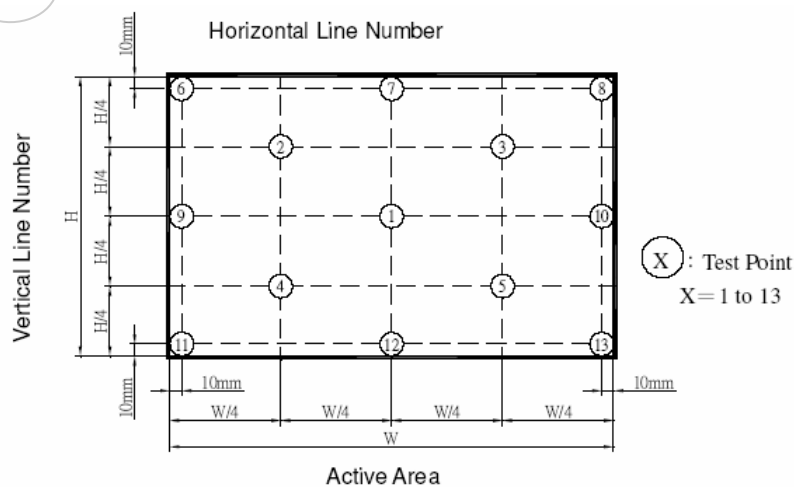


#### 4.9.4 Definition of response time

Response time is measured, the luminance changes from “white” to “black”, or “black” to “white” on the same screen point, by photo-detector. Ton is the time it takes the luminance change from 90% down to 10%. Also Toff is the time it takes the luminance change from 10% up to 90%. (See the following diagram.)

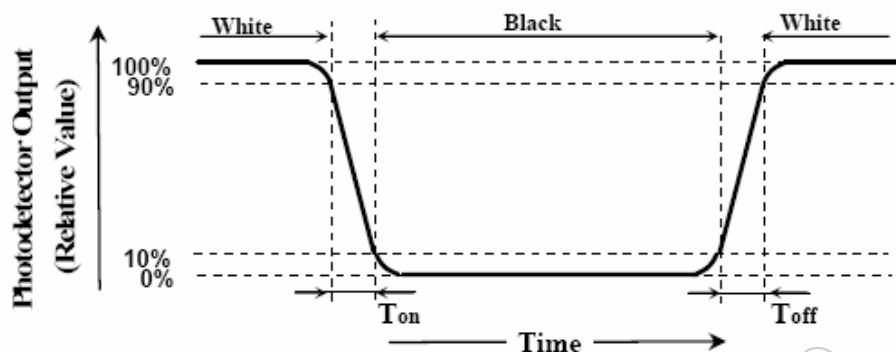

#### 4.9.5 Definition of viewing angle

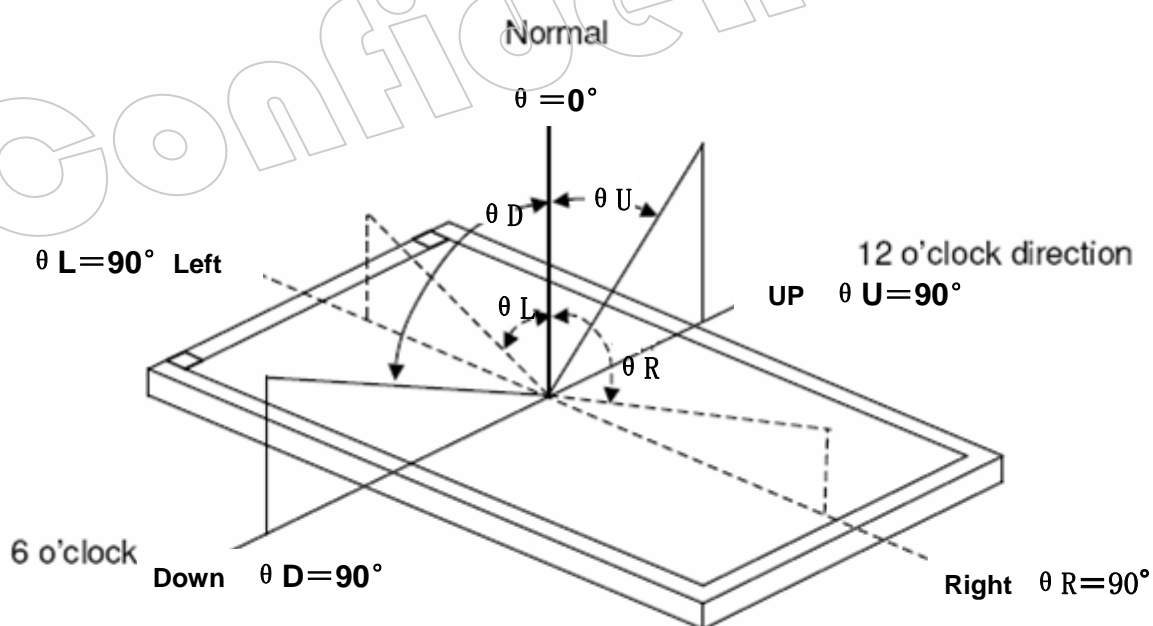


## 5. RELIABILITY TESTS

Test item		Condition	Judgement Note1
High temperature and humidity(Operation)		① $50\pm 2^{\circ}\text{C}$ , RH=85%, 240hours ② Display data is black	No display malfunctions
Heat cycle (Operation)		① $0\pm 3^{\circ}\text{C}$ ...1hour $55\pm 3^{\circ}\text{C}$ ...1hour ② 50cycles, 4hours/cycle ③ Display data is black	
Thermal shock (Non operation)		① $-20\pm 3^{\circ}\text{C}$ ...30minutes $60\pm 3^{\circ}\text{C}$ ...30minutes ② 100cycles, 1hour/cycle ③ Temperature transition time is within 5 minutes.	
ESD (operation)		① 150Pf, 150 $\Omega$ , $\pm 10\text{kV}$ ② 9 places on a panel surface ③ 10 times each places at 1 sec interval	
Vibration (Non operation)		① 5-100Hz, sine wave, $11.76\text{m/S}^2$ ② 1 minutes/cycle ③ X, Y, Z direction ④ 50 times each directions	No display malfunctions No physical damages
Mechanical shock (Non operation)		① $294\text{m/S}^2$ , 11ms ② $\pm X$ , $\pm Y$ , $\pm Z$ direction ③ 3 times each directions	
Low pressure	operation	① 53.3kPa (Equivalent to altitude 4,850m) ② $0^{\circ}\text{C}\pm 3^{\circ}\text{C}$ ...24hours ③ $50^{\circ}\text{C}\pm 3^{\circ}\text{C}$ ...24hours	No display malfunctions
	non-operation	① 15kPa (Equivalent to altitude 13,600m) ② $-20^{\circ}\text{C}\pm 3^{\circ}\text{C}$ ...24hours ③ $60^{\circ}\text{C}\pm 3^{\circ}\text{C}$ ... 24hours	

Note1: Display and appearance are checked under environmental conditions equivalent to the inspection conditions of defect criteria.

Note2: See the following figure for discharge points.

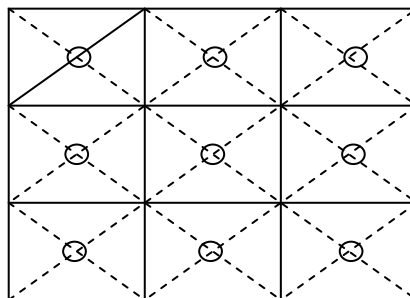

## 6. ESTIMATED LUMINANCE LIFETIME

The luminance lifetime is the time from initial luminance to half-luminance.

**This lifetime is the estimated value, and is not guarantee value.**

Condition	Luminance lifetime(MTTF) <b>Note1</b>	Unit
25℃(Ambient temperature of the product) Continuous operation and IBL=7.0mArms/lamp	50000	Hour

Note1: MTTF is mean time to half-luminance. In case the product works under low temperature environment, the lifetime becomes short.

## 7. MARKINGS

The various markings are attached to this product. See “7.4 INDICATION LOCATIONS” for attachment positions.

### 7.1 PRODUCT LABEL

Note1

Product label

REV of label

UL MARK


ROHS Mark

Country of manufacture

Type name \_\_\_\_\_

Lot number \_\_\_\_\_

OEM number \_\_\_\_\_



Note1: The meaning of lot number

•Example: 1111A104201001


1111	A	1	04	9	01	001
Internal use	Revision 1 letter (Alphabet)	Internal use	Manufacturing year 2 figures of the A.D. end numbers (e.g. A.D2004 is 04.)	Manufacturing month 1 letter	Manufacturing day	Production number Multi-letter (figure)

Note2

Jan. to Sep.: Number of month  
October: A  
November: B  
December: C

Note2: **Do not attach anything such as label and so on, on the product label!** In case repair the product, SVA-NEC needs the contents of product label such as the lot number, inspection date and so on, to identify the warranty period with individual product. If SVA-NEC cannot decipher the contents of product label, such repair shall be entitled to charge. Also SVA-NEC may give a new lot number to reconditioned products.

### 7.2 BARCODE LABEL

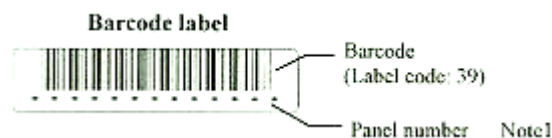


### 7.3 OTHER MARKINGS


High voltage caution marking



Disposal method marking for lamp



7.4 INDICATION LOCATIONS

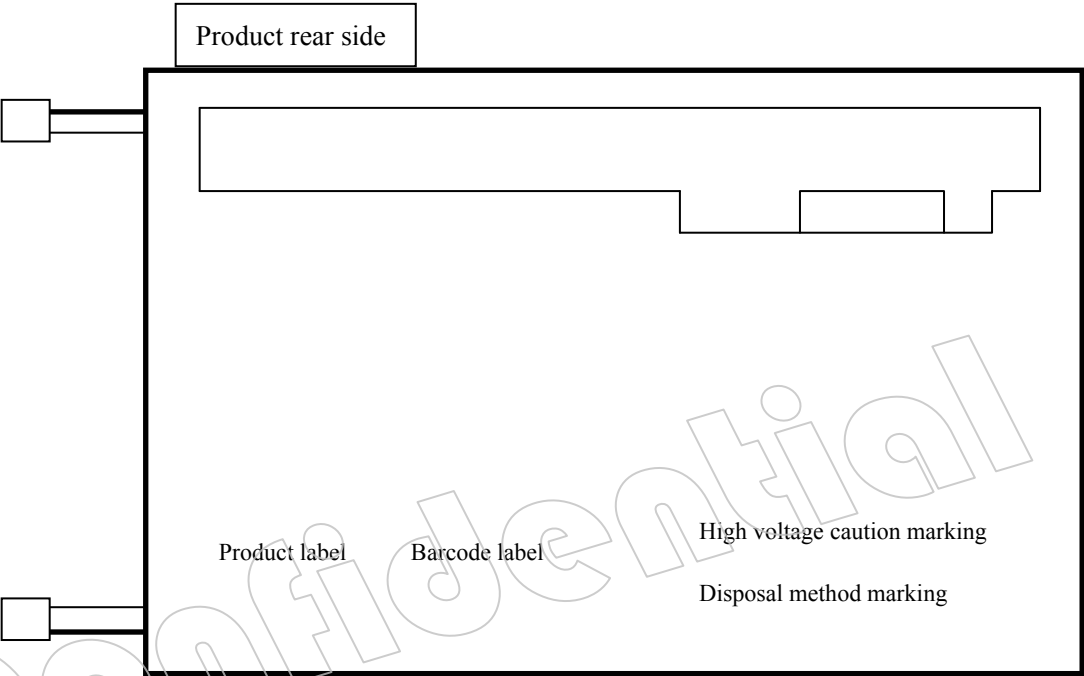



## 8. PACKING, TRANSPORTATION AND DELIVERY

SVA-NEC will pack products to deliver to customer in accordance with SVA-NEC packing specifications, and will deliver products to customer in such a state that products will not suffer from a damage during transportation .The delivery conditions are as follows.

### 8.1 PACKING

#### (1) Packing box

8 products are packed up with the maximum in a packing box(See “**8.5 OUTLINE FIGURE FOR PACKING**”).

Products are put into a plastic bag for prevention of moisture with cushion, and then the bag is sealed up with heat sealing.

The type name and quality are shown on outside of the packing box, either labeling or printing.

#### (2)Pallet Packing (See” **8.5 OUTLINE FIGURE FOR PACKING** “)

① Packing boxes are tired on a cardboard pallet.(9 boxes×4 tiers maximum)

②Cardboard sleeve and top cap are attached to the packing boxes, then they are fixed by a band.

### 8.2 INSPECTION RECORD SHEET

Inspection record sheets are included in the packing box with delivery products to customer. It is summarized to a number of products for pass/fail assessment.

### 8.3 TRANSPORTATION

The product is transported by vehicle, aircraft or shipment in the state of pallet packing.

### 8.4 SIZE AND WEIGHT FOR PACKING BOX


Parameter	Packing box	Unit
Size	237 (L) x317 (W) x446 (H) (typ.)	mm
Weight	1.3 (max.)	kg
Total weight	11 (for reference) (with 8 products)	kg

SN-SA-A0053-05-E

26/33

8.5 OUTLINE FIGURE FOR PACKING


8.5.1 Packing box(For reference)

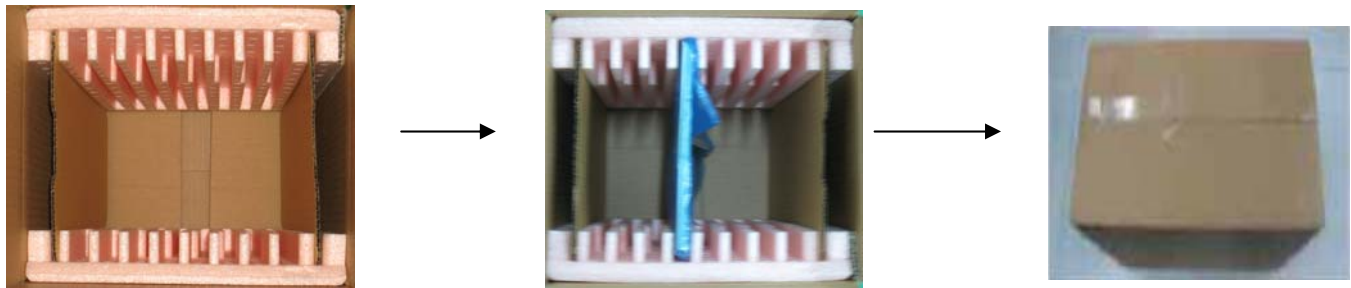

LCD module



Packing box

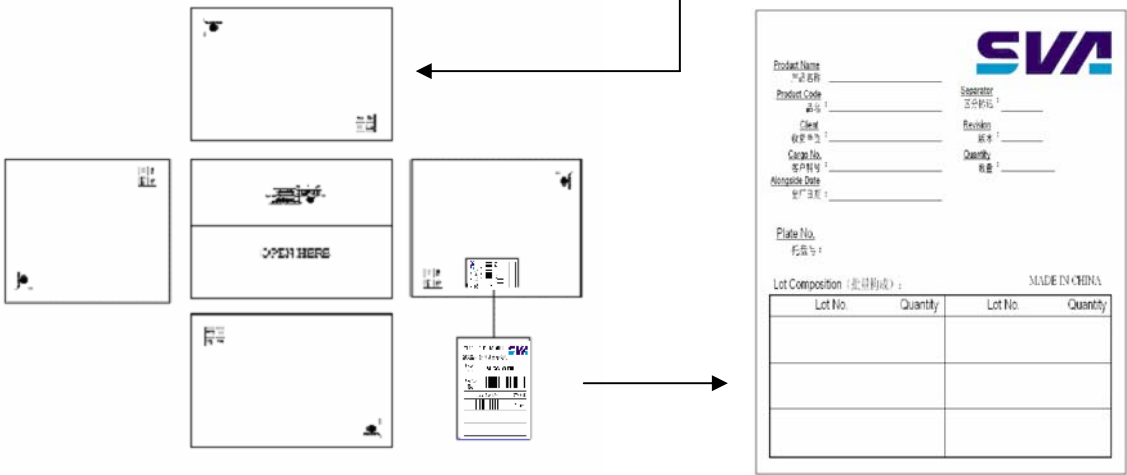


### 8.5.2 Pallet packing

Note: The ways for Packing and Shipping vary from different shipment volume, dependent on specific situations.

Packing boxes (12boxes×4 tiers maximum)

For reference:

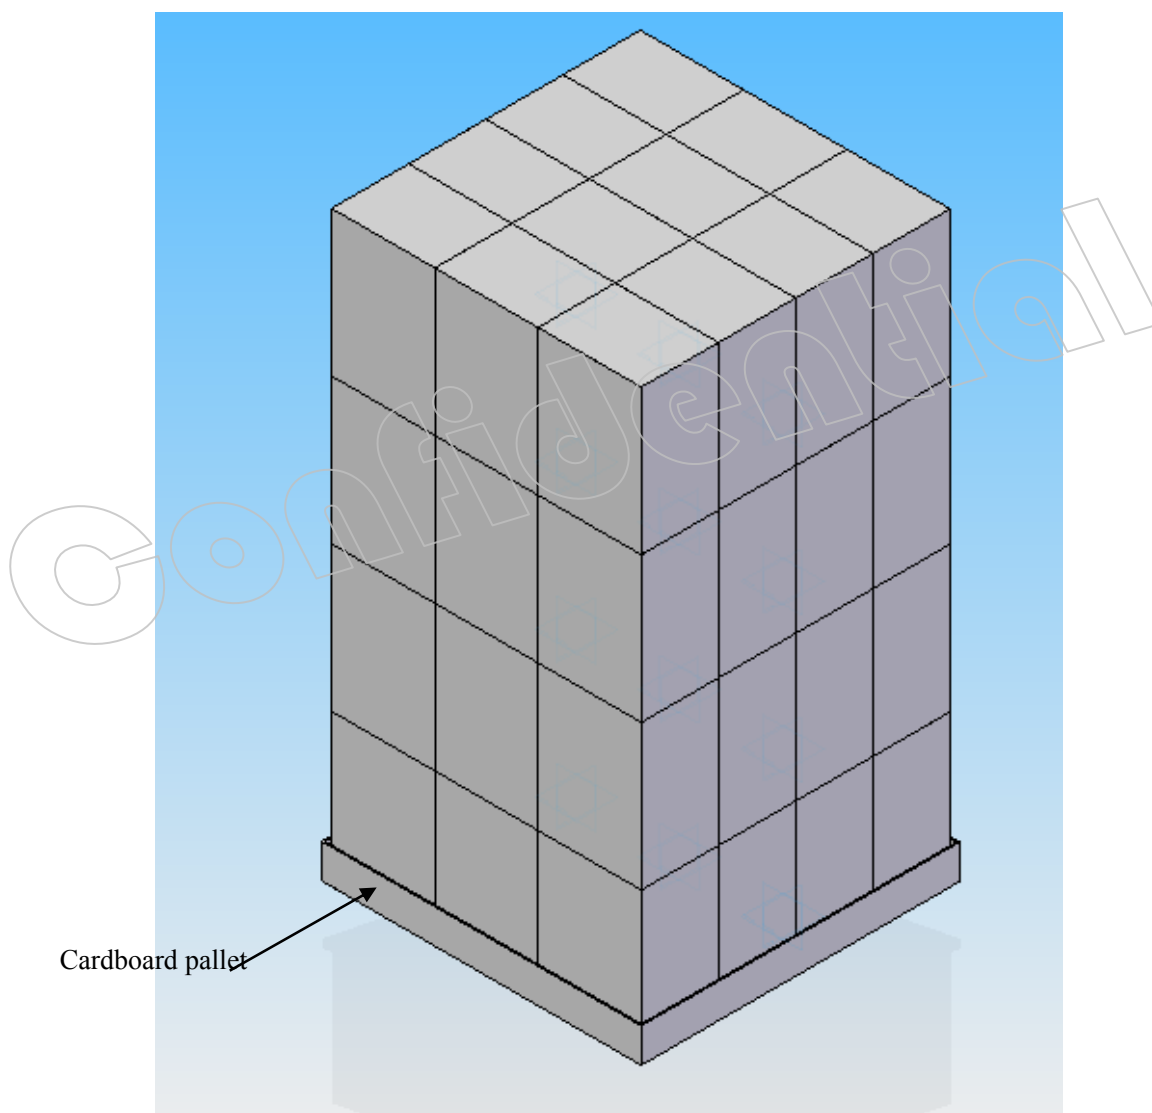

## 9. PRECAUTIONS

### 9.1 MEANING OF CUTION SIGNS

The following caution signs have very important meaning .**Be sure to read “9.2 CAUTIONS” and “9.3 ATTENTIONS”, after understanding these contents!**



This sign have the meaning that customer will be injured by himself or the product will sustain a damage, if customer has wrong operations.



This sign has the meaning that customer will get an electrical shock, if customer has wrong operations.



This sign has the meaning that customer will be injured by himself, if customer has wrong operations.

### 9.2 CAUTIONS



**\* Do not touch lamp cables while turn on .Customers will be in danger of an electric shock**



- \* Do not touch the working backlight and IC. Customers will be in danger of burn injury.**
- \* Do not shock and press the LCD panel and the backlight! There is a danger of breaking, because they are made of glass.(shock :To be not greater  $294\text{m/s}^2$  and to be not greater 11ms, Pressure: To be not greater 19.6N)**

### 9.3 ATTENTIONS



#### 9.3.1 Handling of the product

- ① Take hold of both ends without touch the circuit board when customer pulls out products (LCD modules) from inner packing box. If customer touches it, products may be broken down or out of adjustment, because of stress to mounting parts.
- ② Do not hook cables nor pull connection cables such as flexible cable and so on , for fear of damage.
- ③ If customer puts down the product temporarily, the product puts on flat subsoil as a display side turns down.
- ④ Take the measures of electrostatic discharge such as earth band, ionic shower and so on, when customer deal with the product, because products may be damaged by electrostatic.
- ⑤ The torque for mounting screws must never exceed 0.34N-m. Higher torque values might result in distortion of the bezel.
- ⑥ The product must be installed using mounting holes without undue stress such as bends or twist (See outline drawings).And do not add undue stress to any portion (such as bezel flat area) except mounting hole portion. Bends or twist described above and undue stress to any portion except mounting hole portion may cause display

un-uniformity.

- ⑦ Do not press or rub on the sensitive display surface .If customer clean on the panel surface, SVA-NEC recommends using the cloth with ethanolic liquid such as screen cleaner for LCD.
- ⑧ Do not push-pull the interface connectors while the product is working, because wrong power sequence may break down the product.
- ⑨ Do not bend or unbend the lamp cable at the near part of the lamp holding rubber, to avoid the damage for high voltage side of the lamp. This damage may cause a lamp breaking and abnormal operation of high voltage circuit.

### 9.3.2 Environment

- ① Do not operate or store in high temperature, high humidity, dewdrop atmosphere or corrosive gases. Keep the product in antistatic pouch in room temperature, because of avoidance for dusts and sunlight, if customer stores the product.
- ② In order to prevent dew condensation occurring by temperature difference, the product packing box must be opened after leave under the environment of an unpacking room temperature enough. Because a situation of dew condensation occurring is changed by the environment temperature and humidity, evaluate the leaving time sufficiently. (Recommendation leaving time: 6 hour or more with packing state)
- ③ Do not operate in a high magnetic field .Circuit boards may be broken down by it.
- ④ This product is not designed as radiation hardened.
- ⑤ Use an original protection sheet on the product surface (polarizer). Adhesive type protection sheet should be avoided, because it may change color or properties of the polarizer.

### 9.3.3 Characteristics

**The following items are neither defects nor failures.**

- ① Response time, luminance and color may be changed by ambient temperature.
- ② The LCD may be seemed luminance non-uniformity, flicker, vertical seam or small spot by display patterns.
- ③ Optical characteristics (e.g. luminance, display uniformity, etc.) gradually is going to change depending on operating time ,and especially low temperature, because the LCD has cold cathode fluorescent lamps.
- ④ Do not display the fixed pattern for a long time because it may cause image sticking .Use a screen saver, if the fixed pattern is displayed on the screen.
- ⑤ The display color may be changed by viewing angle because of the use of condenser sheet in the backlight.
- ⑥ Optical characteristics may be changed by input signal timings.
- ⑦ The interference noise of input signal frequency for this product and luminance control frequency of customer's backlight inverter may appear on a display. Set up luminance control frequency of backlight inverter so that the interference noise does not appear.

### 9.3.4 Other


- ① All GND and VCC terminals should be used without a non-connected line.
- ② Do not disassemble a product or adjust volume without permission of SVA-NEC.
- ③ Pay attention not to insert waste materials inside of products, if customer uses screw nails.
- ④ Pack the product with original shipping package, because of avoidance of some damages during transportation, when customer returns it to SVA-NEC for repair and so on .
- ⑤ Not only the module but also the equipment should be packed and transported as the module. becomes vertical .Otherwise, there is the fear that a display dignity decreases by an impact or vibrations.

SN-SA-A0053-05-E

30/33

## 10.OUTDRAWING


### 10.1 FRONT VIEW

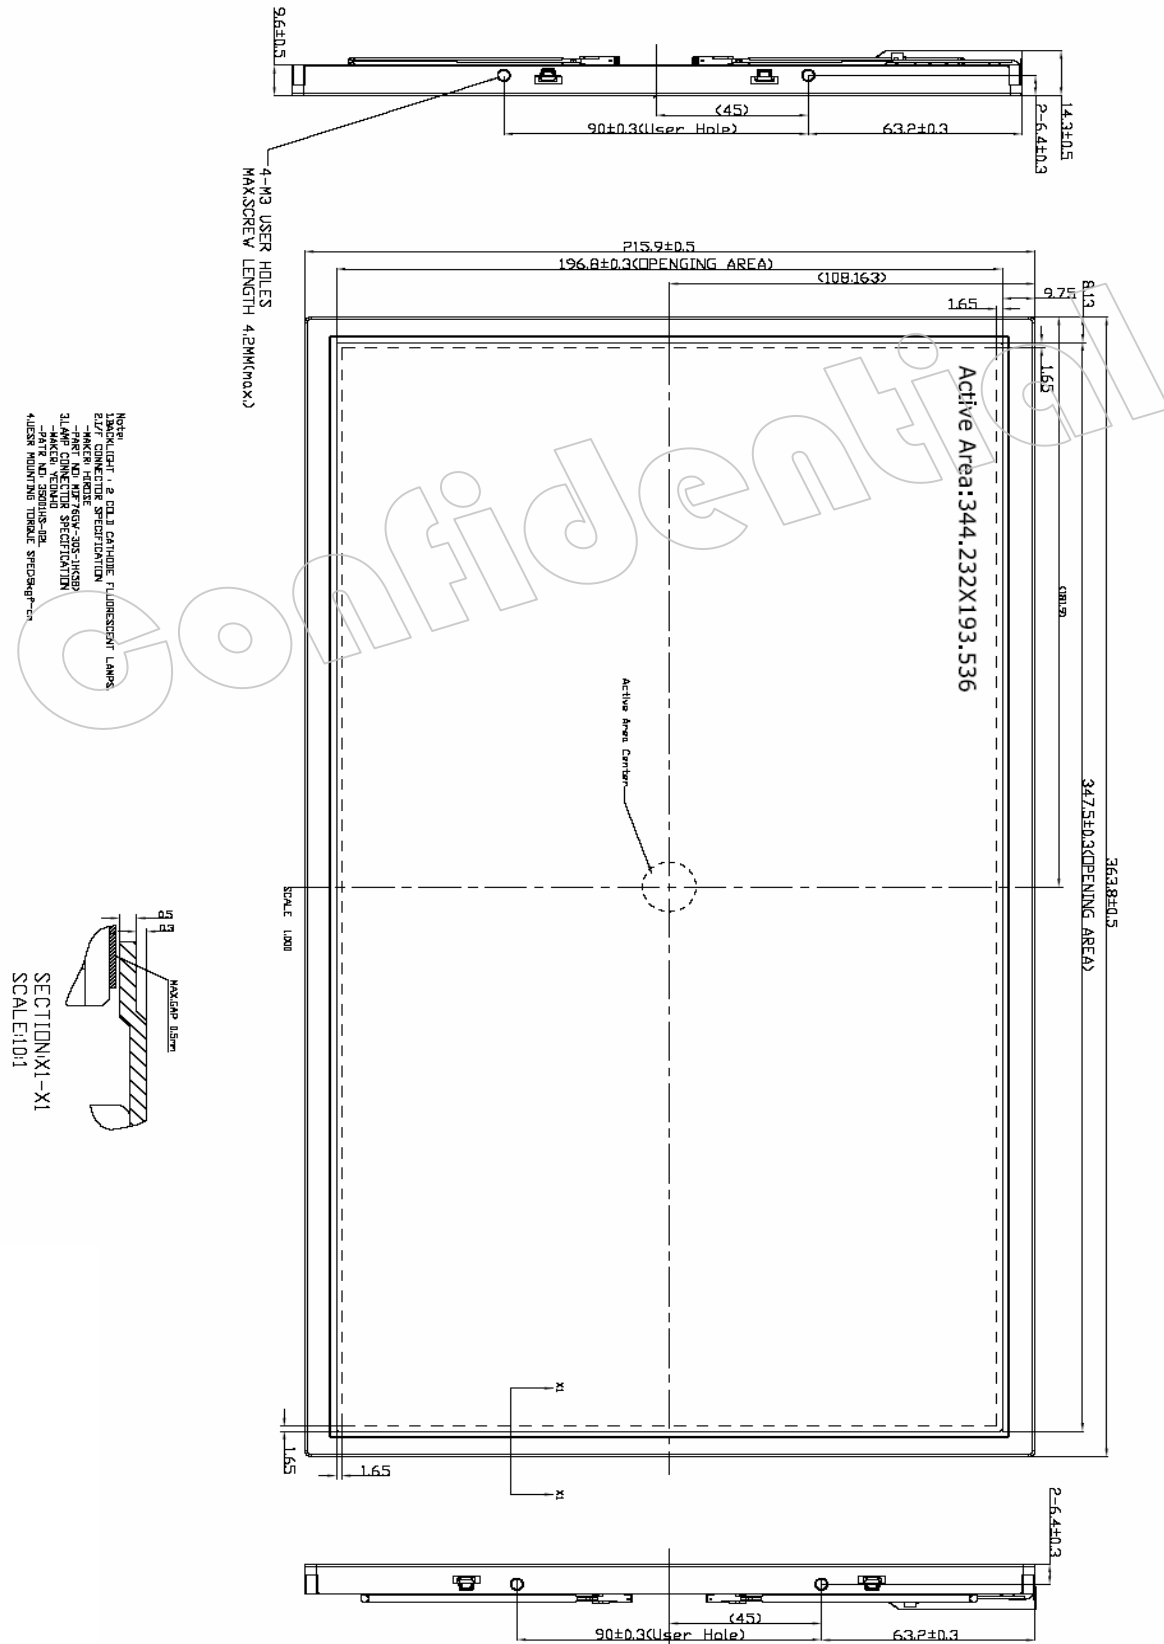

SN-SA-A0053-05-E

31/33

## 10.2 REAR VIEW

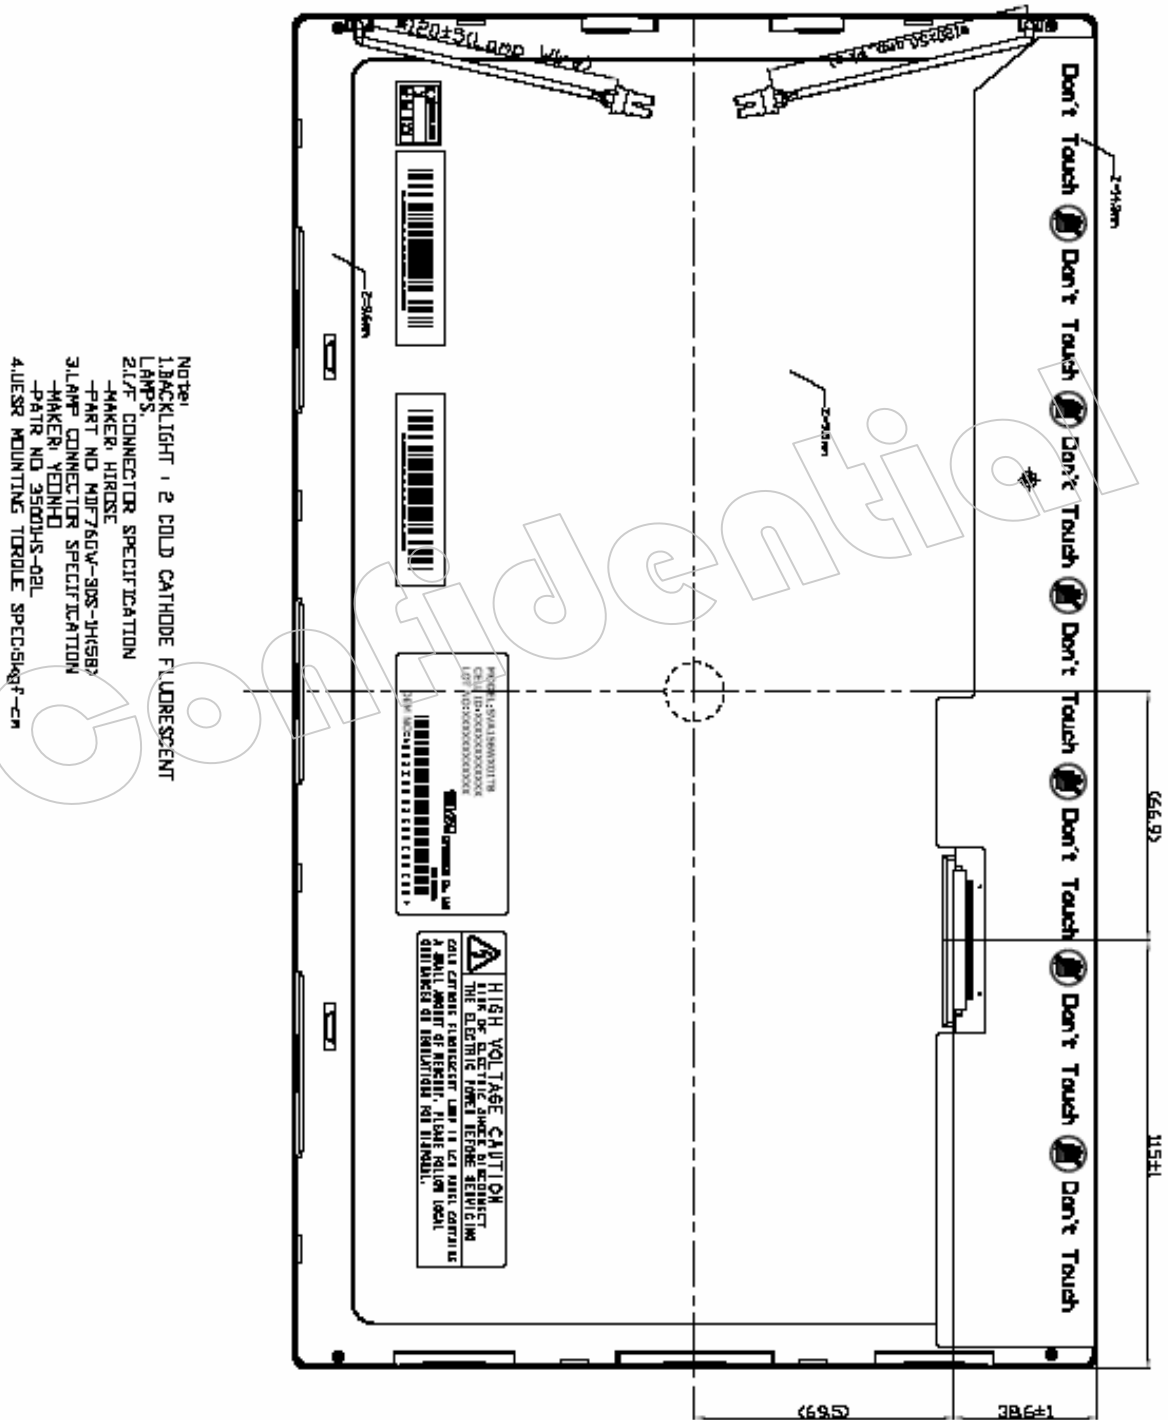

						SN-SA-A0053-05-E		32/33											
Rev	Revised date	Main Revision item and sign					Approved by	Checked by	Prepared by	Published date									
1.0	2008.1.30	<table><tr><td rowspan="2">s i g n</td><td>品管</td><td>营业</td><td>生产技术</td><td>产品技术</td></tr><tr><td>黎江平</td><td>孙亚伟</td><td>陈晟</td><td>沈红玉</td></tr></table>					s i g n	品管	营业	生产技术	产品技术	黎江平	孙亚伟	陈晟	沈红玉	吕理煌 2008.2.1	周时欢 2008.2.1	邱永亮 2008. 1. 30	2008.2.2
s i g n	品管	营业	生产技术	产品技术															
	黎江平	孙亚伟	陈晟	沈红玉															
2.0	2008.3.26	<table><tr><td rowspan="2">s i g n</td><td>品管</td><td>营业</td><td>生产技术</td><td>产品技术</td></tr><tr><td>黎江平</td><td>孙亚伟</td><td>陈晟</td><td>沈红玉</td></tr></table> <p>1. The diagonal size of display is corrected(40cm-&gt;39.5cm). (p1,p5,p7)</p> <p>2. The minimum of the horizontal signals is corrected(1466→1446).(p16)</p>					s i g n	品管	营业	生产技术	产品技术	黎江平	孙亚伟	陈晟	沈红玉	吕理煌 2008.3.26	周时欢 2008.3.26	邱永亮 2008.3.26	2008.3.26
s i g n	品管	营业	生产技术	产品技术															
	黎江平	孙亚伟	陈晟	沈红玉															
3.0	2008.6.26	<table><tr><td rowspan="2">s i g n</td><td>品管</td><td>营业</td><td>生产技术</td><td>产品技术</td></tr><tr><td>黎江平</td><td>孙亚伟</td><td>陈晟</td><td>沈红玉</td></tr></table> <p>1. The RGB coordinate is revised.(P18)</p>					s i g n	品管	营业	生产技术	产品技术	黎江平	孙亚伟	陈晟	沈红玉	吕理煌 2008.6.28	周时欢 2008.6.26	邱永亮 2008.6.26	2008.6.26
s i g n	品管	营业	生产技术	产品技术															
	黎江平	孙亚伟	陈晟	沈红玉															



						SN-SA-A0053-05-E		33/33		
Rev	Revised date	Main Revision item and sign				Approved by	Checked by	Prepared by	Published date	
4.0	2008.7.21	s i g n	品管	营业	生产技术	产品技术	吕理煌 2008.7.22	周时欢 2008.7.21	邱永亮 2008.7.21	2008.7.24
			黎江平	孙亚伟	陈晟	沈红玉				
		1、 The Outdrawing is renewed. (P30,P31) 2、 The value of power consumption is revised.(P5)								
5.0	2008.8.19	s i g n	品管	营业	生产技术	产品技术	吕理煌 2008.8.19	周时欢 2008.8.19	邱永亮 2008.8.19	2008.8.21
			黎江平	孙亚伟	陈晟	沈红玉				
		1、 The RoHS and TCO items are added.(P4) 2、 The transmissive mode and surface treatment are added.(P5)								
		s i g n	品管	营业	生产技术	产品技术				