

SPST RF Switch, 10 - 1000 MHz


**SW-121-PIN
V3**

Features

- Low Loss: 0.5 dB Typical
- High Isolation: 60 dB Typical
- Integral TTL Driver
- Hermetic Package
- 50 Ohm Nominal Impedance
- MIL-STD-883 Screening Available

Description

Functional Block Diagram

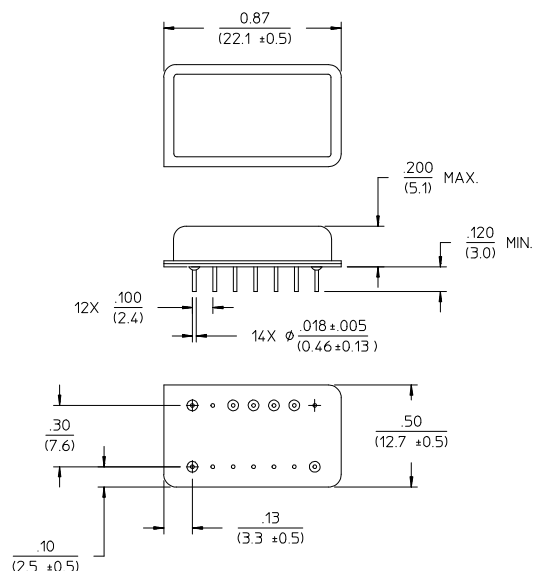

Dimensions in () are in mm
 Unless Otherwise Noted: XXX = ± 0.010 (XX = ± 0.25)
 XX = ± 0.02 (X = ± 0.5)
 WEIGHT (APPROX): 0.14 OUNCES 4 GRAMS

Ordering Information

Part Number	Package
SW-121-PIN	DI-1

Note: Reference Application Note M513 for reel size information.

Note: Die quantity varies.

Truth Table

TTL Control Input "1" = TTL Logic High	Condition of Switch
	RF1 to RF2
0	Off
1	On

* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

**SPST RF Switch,
10 - 1000 MHz**

**SW-121-PIN
V3**

Electrical Specifications: $T_A = -55^\circ\text{C}$ to $+85^\circ\text{C}$ ¹

Parameter	Test Conditions	Frequency	Units	Min	Typ	Max
Insertion Loss	—	10 - 1000 MHz 10 - 500 MHz	dB dB	— —	— —	1.0 0.8
VSWR	—	10 - 1000 MHz 10 - 500 MHz	Ratio Ratio	— —	— —	1.25:1 1.2:1
Isolation	—	10 - 1000 MHz 10 - 500 MHz 10 - 100 MHz	dB dB dB	40 50 60	— — —	— — —
Ton Toff Transients	In-band	— — —	μS μS mV	— — —	2.0 1.0 40	— — —
1 dB Compression	Input Power	—	dBm	—	+13	—
IP ₂	For two tone input power up to +5 dBm	—	dBm	—	+60	—
IP ₃	For two tone input power up to +5 dBm	—	dBm	—	+30	—
Bias Power	+9 to +15 VDC @ 35 mA Max -5 VDC $\pm$ 5% @ 35 mA Max	—	mW	—	450	—


1. All specifications apply when operated with bias voltages of +12 VDC and -5 VDC ($\pm$ 5%) and 50 ohm impedance at all RF ports.

**SPST RF Switch,
10 - 1000 MHz**


**SW-121-PIN
V3**

Typical Performance Curves

Insertion Loss

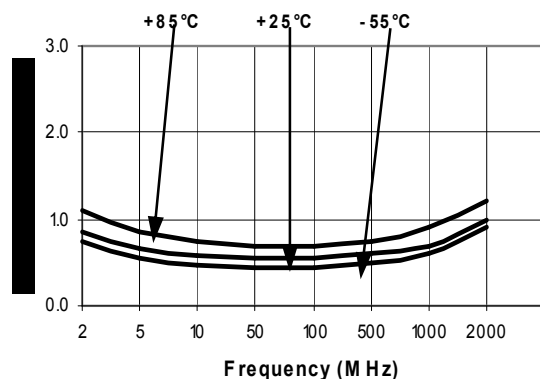

Isolation

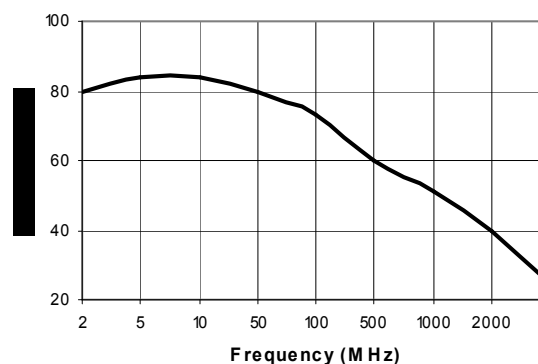

VSWR

