

Surface Mount Directional Coupler

50Ω 10 dB Coupling 10 to 400 MHz 16 Watt

SYDC-10-42HP+



CASE STYLE: AH1596

PRICE: \$29.95 ea. QTY (1-9)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings

Operating Temperature -40°C to 60°C Case*


Storage Temperature -55°C to 100°C

*Case temperature is defined as temperature on ground leads. Permanent damage may occur if any of these limits are exceeded.


Pad Connections

INPUT	8
OUTPUT	1
COUPLED (forward)	5
EXTERNAL 50Ω	4
GROUND	2,3,6,7

Outline Drawing

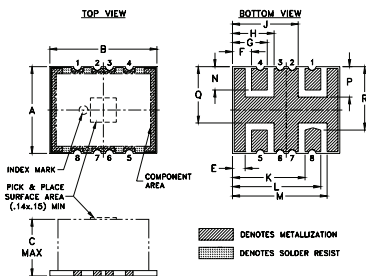


PCB Land Pattern



Outline Dimensions (inch)

A	B	C	E	F	G	H	J
.500	.620	.36	.073	.110	.200	.240	.380
12.70	15.75	9.14	1.85	2.79	5.08	6.10	9.65
K	L	M	N	P	Q	R	wt
.420	.510	.547	.135	.175	.325	.365	grams
10.67	12.95	13.89	3.43	4.45	8.26	9.27	3.00

Demo Board MCL P/N: TB-608+ Suggested PCB Layout (PL-339)

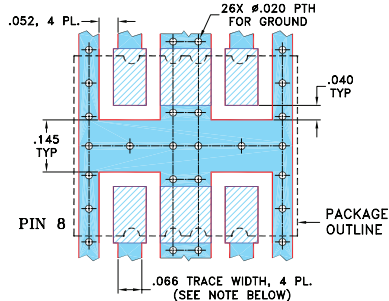

NOTES:

- TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- high power, 16W max.
- flat coupling, ±0.3 dB typ.
- low mainline loss, 0.3 dB typ.

Applications

- signal monitoring
- military defense




Electrical Specifications at 25°C

Parameter	Condition (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		10	—	400	MHz
Mainline Loss (above theoretical 0.45 dB)	10-250 250-400	— —	0.3 0.6	0.7 1.3	dB
Coupling	10-400	9.0	10	10.8	dB
Coupling Flatness(±)	10-400	—	0.3	0.7	dB
Directivity	10 250 400	23 12 7	32 18 12	— — —	dB
Return Loss (Input)	10-400	—	22	—	dB
Return Loss (Output)	10-400	—	22	—	dB
Return Loss (Coupling)	10-400	—	18	—	dB
Input Power ¹	10-400	—	—	16	W


1. The user must provide adequate means of heat removal to limit the temperature of ground connections 2,3,6,7, to 60°C, in order to ensure proper performance. At 25°C ambient temperature this requires thermal resistance of the user's PC board heat sink to be 10°C/W.

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB) In	Return Loss (dB) Out	Cpl
10.00	0.57	10.36	37.66	26.50	27.30	23.24
30.00	0.57	10.37	33.90	27.46	26.78	24.03
50.00	0.58	10.38	30.49	27.81	26.55	24.36
100.00	0.63	10.39	25.07	28.64	25.77	25.13
150.00	0.68	10.39	21.74	29.25	24.96	26.07
200.00	0.75	10.37	19.00	28.26	24.26	26.99
250.00	0.83	10.32	16.89	26.75	23.28	28.37
300.00	0.94	10.26	15.02	24.27	21.93	30.49
350.00	1.07	10.19	13.36	21.60	20.40	32.95
400.00	1.23	10.10	11.82	18.96	18.59	38.73

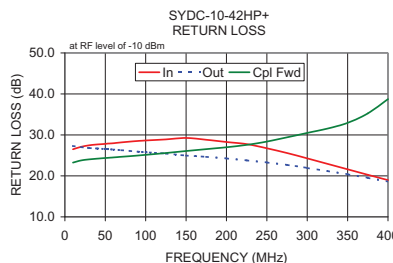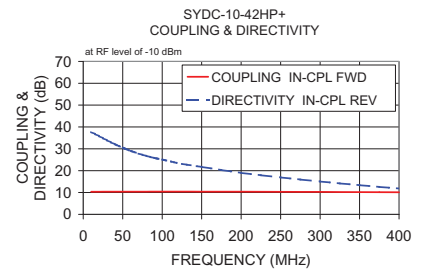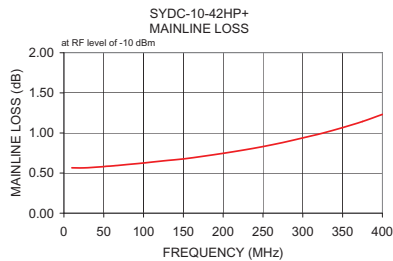

Electrical Schematic



* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) AND EXTERNAL TERMINATION.

For detailed performance specs & shipping online see web site

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED
The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com
I/F/RF MICROWAVE COMPONENTS

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. A
M138436
ED-14339/2
SYDC-10-42HP+
WP/CP/AM
120816