

# LCD Module Technical Specification

First Edition  
October 09, 2009

Final Revision  
\*\*\*\*\*

---

Type No. **T-55532D104J-LW-A-ABN**

---

Customer :

Customer's Product No :

## OPTREX CORPORATION

Approved : Yasuo Kawasaki  
QUALITY ASSURANCE DIVISION

Checked : Toshiaki Ochi  
Test Production Control G.

Prepared : Noboru Wada  
Design G.

APPROVED

By \_\_\_\_\_

Signature :

Date :

Please return this specification within two month with your signature.  
If not returned within two month ,specification will be considered  
as having been accepted.

# CONTENTS

| No. | Item                                    | Page |
|-----|-----------------------------------------|------|
| --  | CONTENTS                                | 2    |
| 1   | APPLICATION                             | 3    |
| 2   | OVERVIEW                                | 4    |
| 3   | ABSOLUTE MAXIMUM RATINGS                | 5    |
| 4   | ELECTRICAL CHARACTERISTICS              | 5    |
| 5   | INTERFACE PIN CONNECTION                | 7    |
| 6   | INTERFACE TIMING                        | 8    |
| 7   | BLOCK DIAGRAM                           | 11   |
| 8   | MECHANICAL SPECIFICATION                | 12   |
| 9   | OPTICAL CHARACTERISTICS                 | 14   |
| 10  | RELIABILITY TEST CONDITION              | 17   |
| 11  | INSPECTION STANDARDS                    | 18   |
| 12  | OTHER FEATURE                           | 19   |
| 13  | HANDLING PRECAUTIONS FOR TFT-LCD MODULE | 20   |
| --  | PACKAGING SPECIFICATION                 | 23   |
| --  | PRODUCTS NUMBER LABELING FORMS          | 26   |
| --  | LED UNIT for 10.4" VGA                  | 27   |

## Revision History

| Rev. | Date | Page | Comment |
|------|------|------|---------|
|      |      |      |         |

# 1. APPLICATION

This specification applies to color TFT-LCD module, T-55532D104J-LW-A-ABN.

These specification papers are the proprietary product of OPTREX CORPORATION ("OPTREX") and include materials protected under copyright of OPTREX. No part of this document may be reproduced in any form or by any means without the express written permission of OPTREX.

OPTREX does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a product specified in this document. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of OPTREX or of others.

OPTREX classifies the usage of the TFT-LCD module as follows. Please confirm the usage before using the product.

(1) Standard Usage

Computers, office equipment, factory automation equipment, test and measurement equipment, communications, transportation equipment(automobiles, ships, trains, etc.), provided, however, that operation is not influenced by TFT-LCD directly.

(2) Special Usage

Medical equipment, safety equipment, transportation equipment, provided, however, that TFT-LCD is necessary to its operation.

(3) Specific Usage

Cockpit Equipment, military systems, aerospace equipment, nuclear reactor control systems, life support systems and any other equipment. OPTREX should make a contract that stipulate apportionment of responsibilities between OPTREX and our customer.

The product specified in this document is designed for "Standard Usage" unless otherwise specified in this document. If customers intend to use the product for applications other than those specified for "Standard Usage", they should first contact OPTREX sales representative for it's intended use in writing.

OPTREX has been making continuous effort to improve the reliability of its products. Customers should implement sufficient reliability design of their application equipments such as redundant system design, fail-safe functions, anti-failure features.

OPTREX assumes no responsibility for any damage resulting from the use of the product that does not comply with the instructions and the precautions specified in this document.

Please contact and consult OPTREX sales representative for any questions regarding this product.

|                       |                    |           |
|-----------------------|--------------------|-----------|
| T-55532D104J-LW-A-ABN | OPTREX CORPORATION | Page 3/33 |
|-----------------------|--------------------|-----------|

## 2. OVERVIEW

T-55532D104J-LW-A-ABN is 10.4" color TFT-LCD (Thin Film Transistor Liquid Crystal Display) module composed of LCD panel, driver ICs, control circuit, and backlight unit.

By applying 6 bit digital data  $640 \times 480$ , 262k-color images are displayed on the 10.4" diagonal screen. Input power voltage is 3.3 V for LCD driving.

The type of data and control signals are digital and transmitted via CMOS interface per Typ. 25 MHz clock cycle.

Driver circuit for LED backlight is not included in this module. General specifications are summarized in the following table:

| ITEM                                   | SPECIFICATION                                       |
|----------------------------------------|-----------------------------------------------------|
| Display Area (mm)                      | 211.2(H) $\times$ 158.4 (V)<br>(10.4-inch diagonal) |
| Number of Dots                         | $640 \times 3$ (H) $\times$ 480 (V)                 |
| Pixel Pitch (mm)                       | 0.33 (H) $\times$ 0.33 (V)                          |
| Color Pixel Arrangement                | RGB vertical stripe                                 |
| Display Mode                           | Normally white TN                                   |
| Number of Color                        | 262k                                                |
| Luminance (cd/m <sup>2</sup> )         | 800                                                 |
| Wide Viewing Angle Technology          | Optical compensation film                           |
| Viewing Angle (CR $\geq$ 10)           | -70~70° (H) -65~65° (V)                             |
| Surface Treatment                      | Anti-glare and hard-coating 3H                      |
| Electrical Interface                   | CMOS                                                |
| Optimum Viewing Angle (Contrast ratio) | 6 o'clock                                           |
| Module Size (mm)                       | 230.0(W) $\times$ 180.2(H) $\times$ 10.5(D)         |
| Module Mass (g)                        | 520                                                 |
| Backlight Unit                         | LED, edge-light, replaceable                        |

Characteristic value without any note is typical value.

### 3. ABSOLUTE MAXIMUM RATINGS

| ITEM                                                   | SYMBOL                    | MIN. | MAX. | UNIT |
|--------------------------------------------------------|---------------------------|------|------|------|
| Power Supply Voltage for LCD                           | VCC                       | -0.3 | 4.0  | V    |
| Logic Input Voltage                                    | VI                        | -0.3 | 6.0  | V    |
| Backlight (LED) Current                                | IF                        | 0    | 180  | mA   |
| Operation Temperature (Panel) <small>Note 1,2)</small> | T <sub>op</sub> (Panel)   | -20  | 70   | °C   |
| Operation Temperature (Ambient) <small>Note 2)</small> | T <sub>op</sub> (Ambient) | -20  | 70   | °C   |
| Storage Temperature <small>Note 2)</small>             | T <sub>stg</sub>          | -20  | 80   | °C   |

[Note]

1) Measured at the center of active area and at the center of panel back surface

2) Top, Tstg ≤ 40°C : 90%RH max. without condensation

Top, Tstg > 40°C : Absolute humidity shall be less than the value of 90%RH at 40°C without condensation.

### 4. ELECTRICAL CHARACTERISTICS

(1) TFT· LCD

Ambient temperature: Ta = 25°C


| ITEM                            | SYMBOL | MIN. | TYP. | MAX. | UNIT  | Remarks   |
|---------------------------------|--------|------|------|------|-------|-----------|
| Power Supply Voltage for LCD    | VCC    | 3.0  | 3.3  | 3.6  | V     | *1)       |
| Power Supply Current for LCD    | ICC    | --   | 250  | 430  | mA    | *2)       |
| Permissive Input Ripple Voltage | VRP    | --   | --   | 100  | mVp-p | VCC=+3.3V |
| Logic Input Voltage             | High   | VIH  | 2.0  | --   | 5.5   | V         |
|                                 | Low    | VIL  | 0    | --   | 0.8   | V         |

\*1) Power and signals sequence:

t1 ≤ 10 ms                      200 ms ≤ t4

0 < t2 ≤ 50 ms              200 ms ≤ t5

0 < t3 ≤ 50 ms              0 ≤ t6

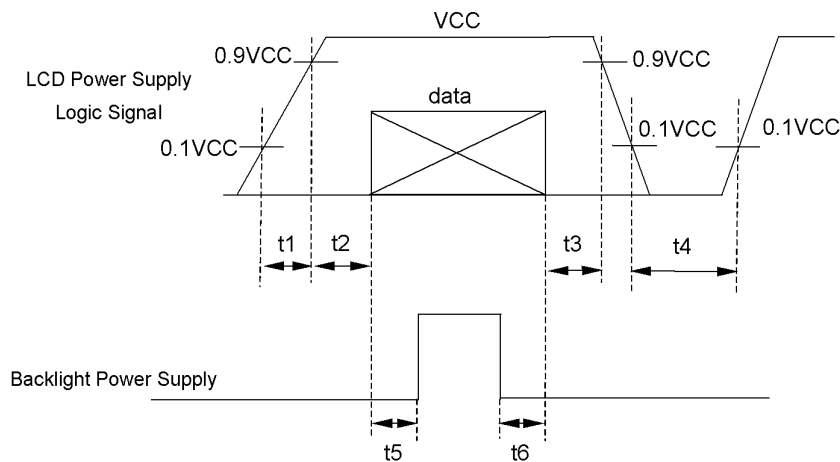

data: RGB DATA, DCLK, DENA, SC


|                       |                    |           |
|-----------------------|--------------------|-----------|
| T-55532D104J-LW-A-ABN | OPTREX CORPORATION | Page 5/33 |
|-----------------------|--------------------|-----------|

VCC-dip conditions:

1) When  $2.4\text{ V} \leq \text{VCC} < 3.0\text{ V}$ ,  $t_d \leq 10\text{ ms}$

2) When  $\text{VCC} < 2.4\text{ V}$

VCC-dip conditions should also follow the power and signals sequence.

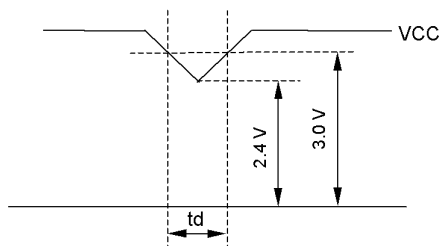

\*2)  $\text{VCC} = +3.3\text{ V}$ ,  $f_H = 31.5\text{ kHz}$ ,  $f_V = 60\text{ Hz}$ ,  $f_{\text{CLK}} = 25\text{ MHz}$

Display image at typical power supply current value is 64-gray-bar pattern (6 bit), 480 line mode.

\*3) Fuse

| Parameter | Fuse Type Name | Supplier                  | Remark |
|-----------|----------------|---------------------------|--------|
| VCC       | FCC16162AB     | Kamaya Electric Co., Ltd. | *)     |

\*) The power supply capacity should be designed to be more than the fusing current.

(2) Backlight


| ITEM          | SYMBOL | MIN.   | TYP. | MAX. | UNIT | Remarks                                                                           |
|---------------|--------|--------|------|------|------|-----------------------------------------------------------------------------------|
| LED Voltage   | VF     | --     | (27) | 33.6 | V    | $I_F = 80\text{ mA}$ , $T_a = 25^\circ\text{C}$                                   |
|               |        | --     | --   | 34.9 | V    | $I_F = 80\text{ mA}$ , $T_a = 0^\circ\text{C}$                                    |
|               |        | --     | --   |      | V    | $I_F = 80\text{ mA}$ , $T_a = -20^\circ\text{C}$                                  |
| LED Current   | IF     | --     | 80   | 90   | mA   | *1), *3)                                                                          |
| LED Life Time | LT     | 60,000 | --   | --   | h    | $I_F = 80\text{ mA}$ , $T_a = 25^\circ\text{C}$<br>*4), *5), Continuous operation |

[Note]

\*1) Constant Current Drive

\*2) The Voltage deviation between strings:  $|V_{f1} - V_{f2}| \leq 2\text{ V}$

\*3) LED Current measurement method

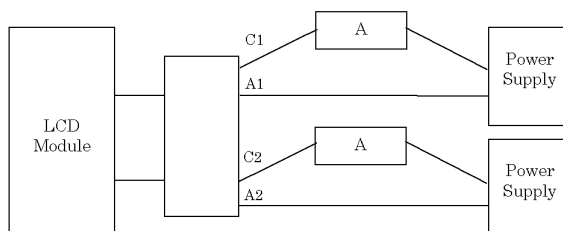

\*4) LED life time is defined as the time when the brightness becomes 50% of the initial value.

\*5) The life time of the backlight depends on the ambient temperature. The life time will decrease under high temperature.

|                       |                    |           |
|-----------------------|--------------------|-----------|
| T-55532D104J-LW-A-ABN | OPTREX CORPORATION | Page 6/33 |
|-----------------------|--------------------|-----------|

## 5. INTERFACE PIN CONNECTION

### (1) CN 1(Interface Signal)

Used connector: DF9B-31P-1V(32) (HIROSE)

Corresponding connector: DF9-31S-1V (HIROSE)

| Pin No. | Symbol | Function                                          |
|---------|--------|---------------------------------------------------|
| 1       | GND    |                                                   |
| 2       | DCLK   | Clock signal for sampling catch data signal       |
| 3       | HD     | Horizontal sync signal *1)                        |
| 4       | VD     | Vertical sync signal *1)                          |
| 5       | GND    |                                                   |
| 6       | R0     | Red data signal(LSB)                              |
| 7       | R1     | Red data signal                                   |
| 8       | R2     | Red data signal                                   |
| 9       | R3     | Red data signal                                   |
| 10      | R4     | Red data signal                                   |
| 11      | R5     | Red data signal(MSB)                              |
| 12      | GND    |                                                   |
| 13      | G0     | Green data signal(LSB)                            |
| 14      | G1     | Green data signal                                 |
| 15      | G2     | Green data signal                                 |
| 16      | G3     | Green data signal                                 |
| 17      | G4     | Green data signal                                 |
| 18      | G5     | Green data signal(MSB)                            |
| 19      | GND    |                                                   |
| 20      | B0     | Blue data signal(LSB)                             |
| 21      | B1     | Blue data signal                                  |
| 22      | B2     | Blue data signal                                  |
| 23      | B3     | Blue data signal                                  |
| 24      | B4     | Blue data signal                                  |
| 25      | B5     | Blue data signal(MSB)                             |
| 26      | GND    |                                                   |
| 27      | DENA   | Data enable signal (to settle the viewing area)   |
| 28      | VCC    | 3.3 V Power Supply                                |
| 29      | VCC    | 3.3 V Power Supply                                |
| 30      | GND    |                                                   |
| 31      | SC     | Scan direction control (Low=Normal, High=Reverse) |

\*1) HD and VD are not being used for timing control.

\*2) Metal frame is connected to signal GND.

(2) CN 2(Backlight)

Backlight-side connector: SM06B-SHLS-TF(LF)(SN) (JST)

(JST)

| Pin No. | Symbol  | Function                 |
|---------|---------|--------------------------|
| 1       | NC      | This pin should be open. |
| 2       | NC      | This pin should be open. |
| 3       | LED C 1 | LED cathode 1            |
| 4       | LED A 1 | LED anode 1              |
| 5       | LED A 2 | LED anode 2              |
| 6       | LED C 2 | LED cathode 2            |

connector: Corresponding  
SHLP-06V-S-B

## 6. INTERFACE TIMING

### (1) Timing Specifications

| ITEM                 |             |               | SYMBOL           | MIN. | TYP. | MAX. | UNIT             |
|----------------------|-------------|---------------|------------------|------|------|------|------------------|
| DCLK                 | Frequency   |               | f <sub>CLK</sub> | 20   | 25   | 30   | MHz              |
|                      | Period      |               | t <sub>CLK</sub> | 33.3 | 40   | 50   | ns               |
|                      | Low Width   |               | tw <sub>CL</sub> | 10   | --   | --   | ns               |
|                      | High Width  |               | tw <sub>CH</sub> | 10   | --   | --   | ns               |
| DATA(R,G,B),<br>DENA | Set up time |               | t <sub>DS</sub>  | 4    | --   | --   | ns               |
|                      | Hold time   |               | t <sub>DH</sub>  | 4    | --   | --   | ns               |
| DENA                 | Horizontal  | Active Time   | t <sub>HA</sub>  | 640  | 640  | 640  | t <sub>CLK</sub> |
|                      |             | Blanking Time | t <sub>HB</sub>  | 20   | 160  | --   | t <sub>CLK</sub> |
|                      |             | Frequency     | f <sub>H</sub>   | 27   | 31.5 | 38   | kHz              |
|                      |             | Period        | t <sub>H</sub>   | 26.3 | 31.7 | 37.0 | μs               |
|                      | Vertical    | Active Time   | t <sub>VA</sub>  | 480  | 480  | 480  | t <sub>H</sub>   |
|                      |             | Blanking Time | t <sub>VB</sub>  | 4    | 45   | --   | t <sub>H</sub>   |
|                      |             | Frequency     | f <sub>V</sub>   | 55   | 60   | 70   | Hz               |
|                      |             | Period        | t <sub>V</sub>   | 14.3 | 16.7 | 18.2 | ms               |

[Note]


- 1) DATA is latched at fall edge of DCLK in this specification.
- 2) DENA (Data Enable) should always be positive polarity as shown in the timing specification.
- 3) DCLK should appear during all invalid period.
- 4) In case of blanking time fluctuation, please satisfy following condition.

$$t_{VBn} > t_{VBn-1} - 3(t_H)$$


|                       |                    |           |
|-----------------------|--------------------|-----------|
| T-55532D104J-LW-A-ABN | OPTREX CORPORATION | Page 8/33 |
|-----------------------|--------------------|-----------|

(2) Timing Chart


a. Pixel Timing Chart

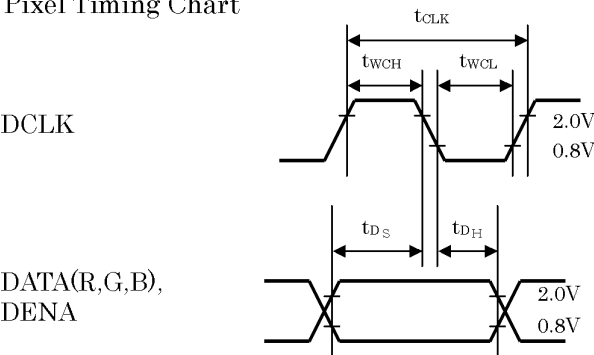

b. Horizontal Timing Chart

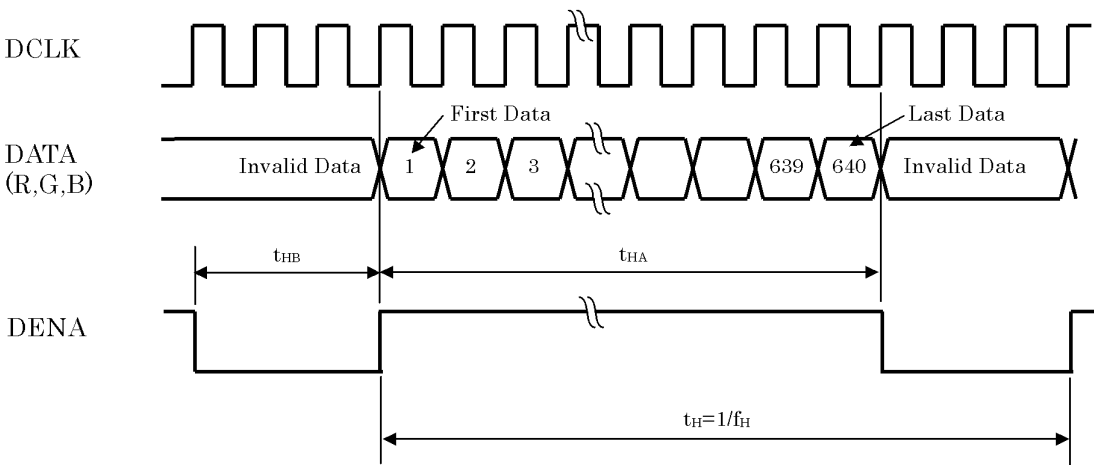

c. Vertical Timing Chart

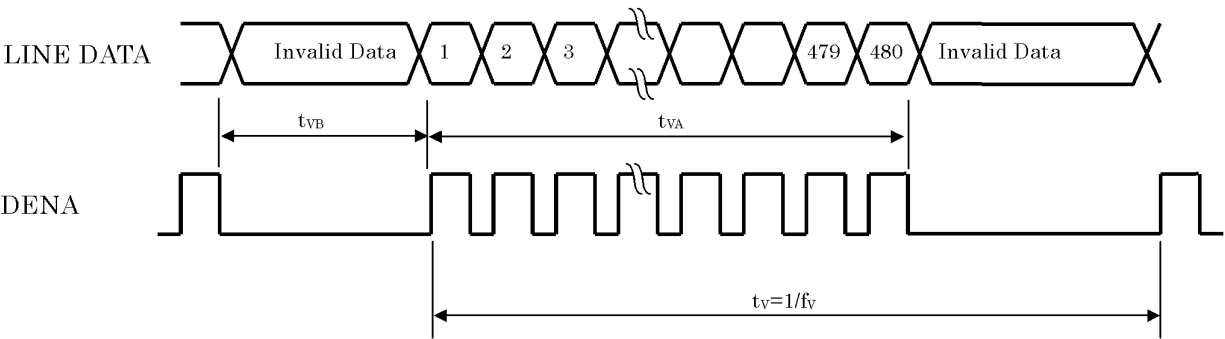

### (3) Color Data Assignment

| COLOR          |           | INPUT DATA |    |    |    |    |     |        |    |    |    |    |     |        |    |    |    |    |     |
|----------------|-----------|------------|----|----|----|----|-----|--------|----|----|----|----|-----|--------|----|----|----|----|-----|
|                |           | R DATA     |    |    |    |    |     | G DATA |    |    |    |    |     | B DATA |    |    |    |    |     |
|                |           | R5         | R4 | R3 | R2 | R1 | R0  | G5     | G4 | G3 | G2 | G1 | G0  | B5     | B4 | B3 | B2 | B1 | B0  |
|                |           | MSB        |    |    |    |    | LSB | MSB    |    |    |    |    | LSB | MSB    |    |    |    |    | LSB |
| BASIC<br>COLOR | BLACK     | 0          | 0  | 0  | 0  | 0  | 0   | 0      | 0  | 0  | 0  | 0  | 0   | 0      | 0  | 0  | 0  | 0  | 0   |
|                | RED(63)   | 1          | 1  | 1  | 1  | 1  | 1   | 0      | 0  | 0  | 0  | 0  | 0   | 0      | 0  | 0  | 0  | 0  | 0   |
|                | GREEN(63) | 0          | 0  | 0  | 0  | 0  | 0   | 1      | 1  | 1  | 1  | 1  | 1   | 0      | 0  | 0  | 0  | 0  | 0   |
|                | BLUE(63)  | 0          | 0  | 0  | 0  | 0  | 0   | 0      | 0  | 0  | 0  | 0  | 0   | 1      | 1  | 1  | 1  | 1  | 1   |
|                | CYAN      | 0          | 0  | 0  | 0  | 0  | 0   | 1      | 1  | 1  | 1  | 1  | 1   | 1      | 1  | 1  | 1  | 1  | 1   |
|                | MAGENTA   | 1          | 1  | 1  | 1  | 1  | 1   | 0      | 0  | 0  | 0  | 0  | 0   | 1      | 1  | 1  | 1  | 1  | 1   |
|                | YELLOW    | 1          | 1  | 1  | 1  | 1  | 1   | 1      | 1  | 1  | 1  | 1  | 1   | 0      | 0  | 0  | 0  | 0  | 0   |
|                | WHITE     | 1          | 1  | 1  | 1  | 1  | 1   | 1      | 1  | 1  | 1  | 1  | 1   | 1      | 1  | 1  | 1  | 1  | 1   |
| RED            | RED(1)    | 0          | 0  | 0  | 0  | 0  | 1   | 0      | 0  | 0  | 0  | 0  | 0   | 0      | 0  | 0  | 0  | 0  | 0   |
|                | RED(2)    | 0          | 0  | 0  | 0  | 1  | 0   | 0      | 0  | 0  | 0  | 0  | 0   | 0      | 0  | 0  | 0  | 0  | 0   |
|                |           |            |    |    |    |    |     |        |    |    |    |    |     |        |    |    |    |    |     |
|                |           |            |    |    |    |    |     |        |    |    |    |    |     |        |    |    |    |    |     |
|                | RED(62)   | 1          | 1  | 1  | 1  | 1  | 0   | 0      | 0  | 0  | 0  | 0  | 0   | 0      | 0  | 0  | 0  | 0  | 0   |
|                | RED(63)   | 1          | 1  | 1  | 1  | 1  | 1   | 0      | 0  | 0  | 0  | 0  | 0   | 0      | 0  | 0  | 0  | 0  | 0   |
| GREEN          | GREEN(1)  | 0          | 0  | 0  | 0  | 0  | 0   | 0      | 0  | 0  | 0  | 0  | 1   | 0      | 0  | 0  | 0  | 0  | 0   |
|                | GREEN(2)  | 0          | 0  | 0  | 0  | 0  | 0   | 0      | 0  | 0  | 0  | 1  | 0   | 0      | 0  | 0  | 0  | 0  | 0   |
|                |           |            |    |    |    |    |     |        |    |    |    |    |     |        |    |    |    |    |     |
|                |           |            |    |    |    |    |     |        |    |    |    |    |     |        |    |    |    |    |     |
|                | GREEN(62) | 0          | 0  | 0  | 0  | 0  | 0   | 1      | 1  | 1  | 1  | 1  | 0   | 0      | 0  | 0  | 0  | 0  | 0   |
|                | GREEN(63) | 0          | 0  | 0  | 0  | 0  | 0   | 1      | 1  | 1  | 1  | 1  | 1   | 0      | 0  | 0  | 0  | 0  | 0   |
| BLUE           | BLUE(1)   | 0          | 0  | 0  | 0  | 0  | 0   | 0      | 0  | 0  | 0  | 0  | 0   | 0      | 0  | 0  | 0  | 0  | 1   |
|                | BLUE(2)   | 0          | 0  | 0  | 0  | 0  | 0   | 0      | 0  | 0  | 0  | 0  | 0   | 0      | 0  | 0  | 0  | 1  | 0   |
|                |           |            |    |    |    |    |     |        |    |    |    |    |     |        |    |    |    |    |     |
|                |           |            |    |    |    |    |     |        |    |    |    |    |     |        |    |    |    |    |     |
|                | BLUE(62)  | 0          | 0  | 0  | 0  | 0  | 0   | 0      | 0  | 0  | 0  | 0  | 0   | 1      | 1  | 1  | 1  | 1  | 0   |
|                | BLUE(63)  | 0          | 0  | 0  | 0  | 0  | 0   | 0      | 0  | 0  | 0  | 0  | 0   | 1      | 1  | 1  | 1  | 1  | 1   |

[Note]

1) Definition of gray scale

Color (n) ---n indicates gray scale level.


Higher n means brighter level.

2) Data


1:High, 0: Low

(4) Display Position and Scan Direction


D(X,Y) shows the data number of input signal.

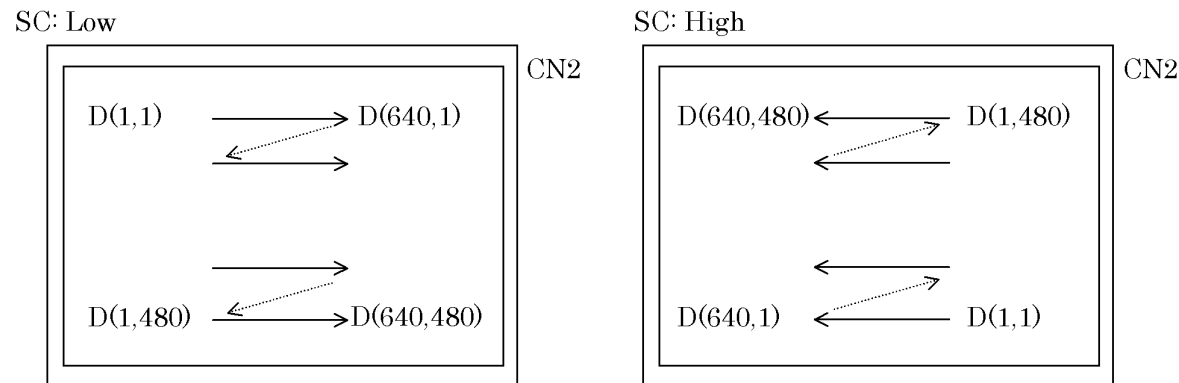

7. BLOCK DIAGRAM

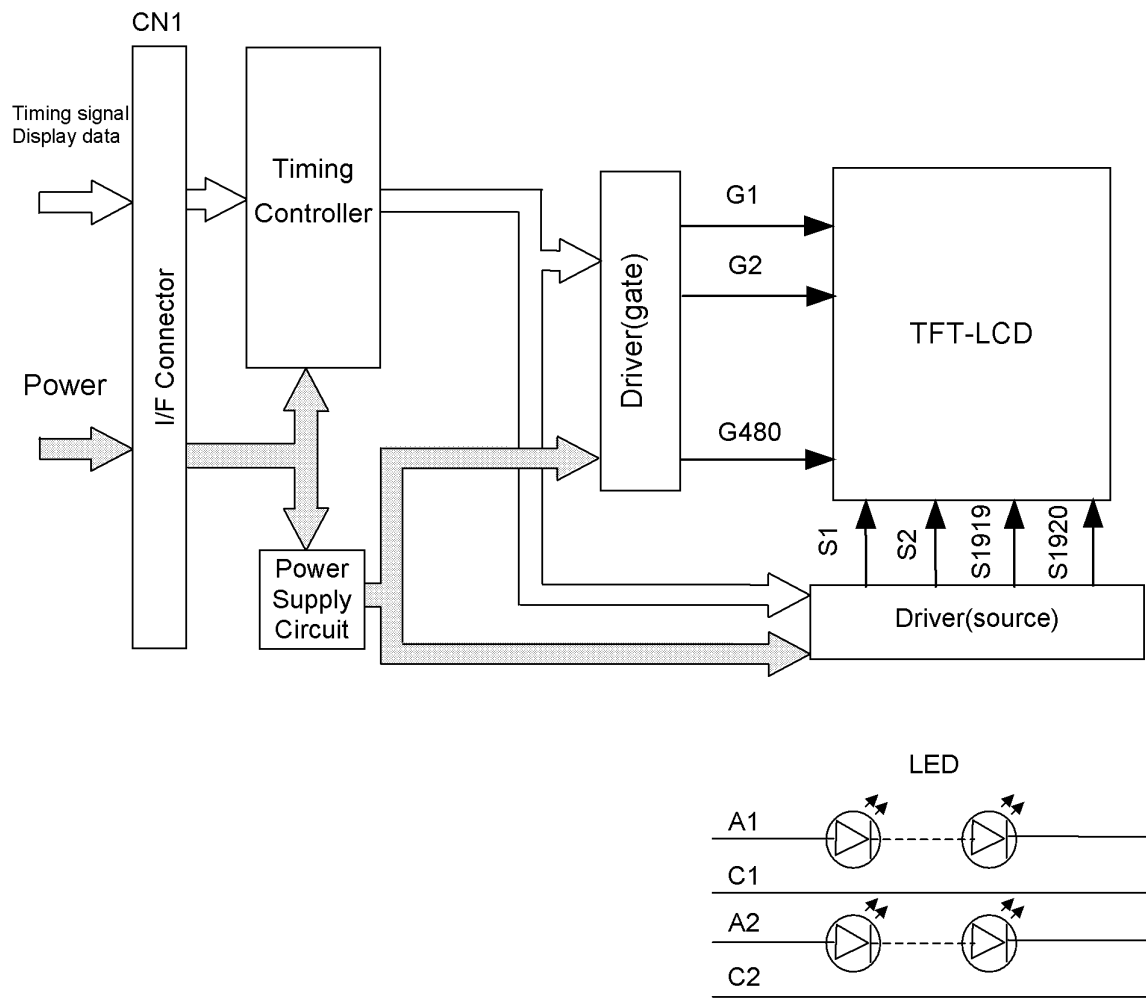


(1) Front Side



OPTREX Confidential

(2) Rear Side

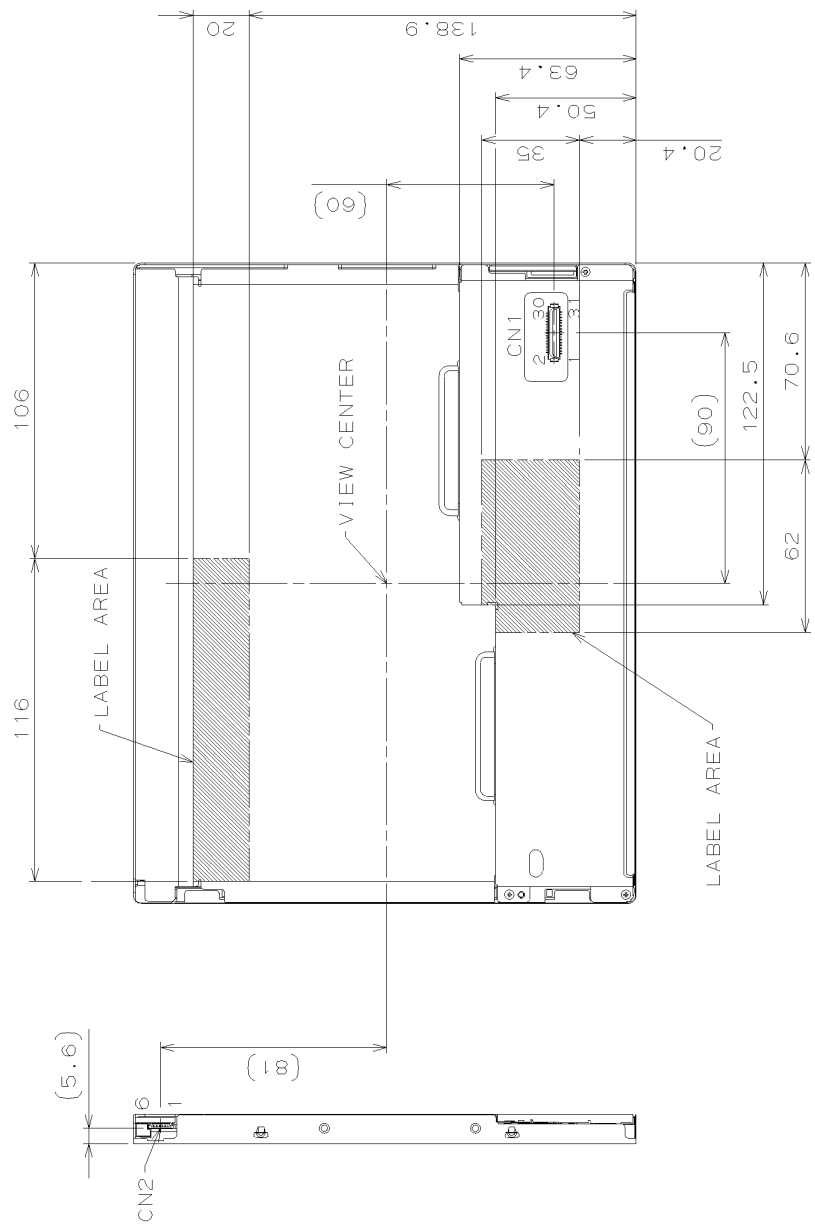

CN1:DF9B-31P-1V(32) (HIROSE)  
CN2:SMO6B-SHLS-TF(LF)(SN) (JST)

1)Tolerance is  $\pm 0.5\text{mm}$  unless noted.  
2)Third angle projection

(Unit: mm)

## 9. OPTICAL CHARACTERISTICS

Ta=25°C, VCC=3.3 V, Input Signals: Typ. values shown in Section 6


| ITEM                 |            | SYMBOL      | CONDITION                            | MIN.   | TYP.   | MAX.  | UNIT              | Remarks   |
|----------------------|------------|-------------|--------------------------------------|--------|--------|-------|-------------------|-----------|
| Contrast Ratio       |            | CR          | $\theta_V=0^\circ, \theta_H=0^\circ$ | 450    | 700    | --    | --                | *1)*2)*5) |
| Luminance            |            | Lw          | $\theta_V=0^\circ, \theta_H=0^\circ$ | 640    | 800    | --    | cd/m <sup>2</sup> | *1)*5)    |
| Luminance Uniformity |            | $\Delta Lw$ | $\theta_V=0^\circ, \theta_H=0^\circ$ | --     | --     | 30    | %                 | *1)*3)*5) |
| Response Time        |            | tr          | $\theta_V=0^\circ, \theta_H=0^\circ$ | --     | 4      | --    | ms                | *1)*4)*5) |
|                      |            | tf          | $\theta_V=0^\circ, \theta_H=0^\circ$ | --     | 12     | --    | ms                | *1)*4)*5) |
| Viewing Angle        | Horizontal | $\theta_H$  | $CR \geq 10$                         | -55~55 | -70~70 | --    | °                 | *1)*5)    |
|                      | Vertical   | $\theta_V$  |                                      | -40~40 | -65~65 | --    | °                 | *1)*5)    |
| Image Sticking       |            | tis         | 2 h                                  | --     | --     | 2     | s                 | *6)       |
| Color Coordinates    | Red        | Rx          | $\theta_V=0^\circ, \theta_H=0^\circ$ | 0.533  | 0.573  | 0.613 | --                | *1)*5)    |
|                      |            | Ry          |                                      | 0.292  | 0.332  | 0.372 |                   |           |
|                      | Green      | Gx          |                                      | 0.319  | 0.359  | 0.399 |                   |           |
|                      |            | Gy          |                                      | 0.502  | 0.542  | 0.582 |                   |           |
|                      | Blue       | Bx          |                                      | 0.119  | 0.159  | 0.199 |                   |           |
|                      |            | By          |                                      | 0.119  | 0.159  | 0.199 |                   |           |
|                      | White      | Wx          |                                      | 0.273  | 0.313  | 0.353 |                   |           |
|                      |            | Wy          |                                      | 0.289  | 0.329  | 0.369 |                   |           |

[Note]

These items are measured using CS1000(MINOLTA) for color coordinates, EZContrast(ELDIM) for viewing angle and CS1000 or BM-5A(TOPCON) for others under the dark room condition (no ambient light) after more than 30 minutes from turning on the lamp unless noted.

Condition: IF = 80 mA


Measurement method for luminance and color coordinates is as follows.

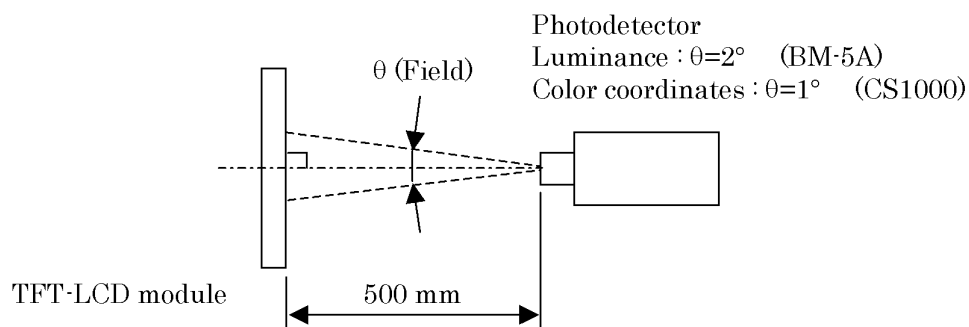

The luminance is measured according to FLAT PANEL DISPLAY MEASUREMENTS STANDARD (VESA Standard).

\*1) Measurement Point

Contrast Ratio, Luminance, Response Time, Viewing Angle, Color Coordinates: Display Center  
Luminance Uniformity: point 1~5 shown in a figure below

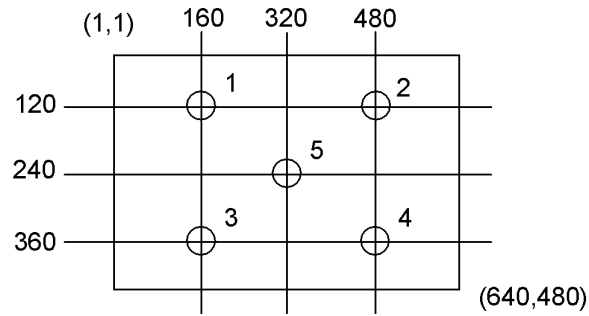


\*2) Definition of Contrast Ratio

CR=Luminance with all white pixels / Luminance with all black pixels


\*3) Definition of Luminance Uniformity

$$\Delta Lw = [Lw(\text{MAX}) / Lw(\text{MIN}) - 1] \times 100$$

\*4) Definition of Response Time

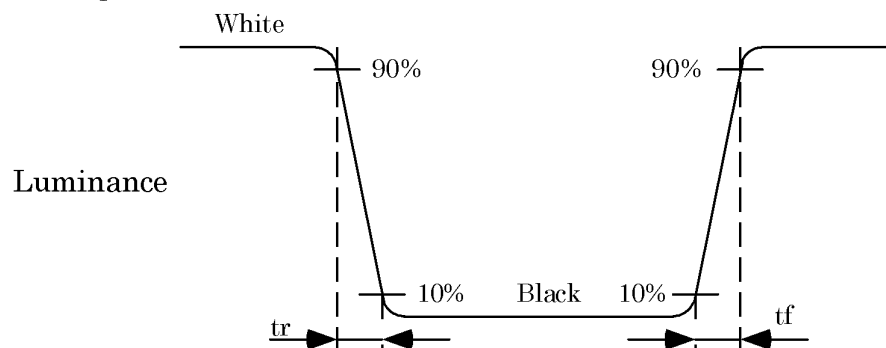


\*5) Definition of Viewing Angle ( $\theta_v$ ,  $\theta_H$ )

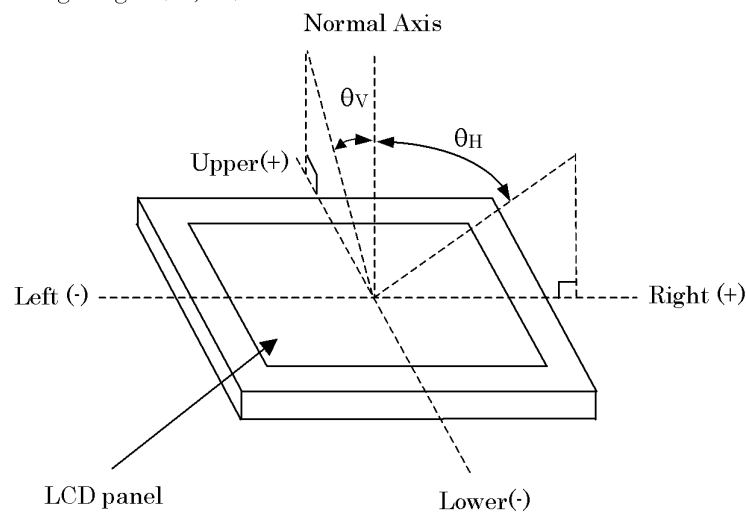

\*6) Image Sticking

Continuously display the test pattern shown in the figure below for two-hours. Then display a completely white screen. The previous image shall not persist more than two seconds at 25°C.

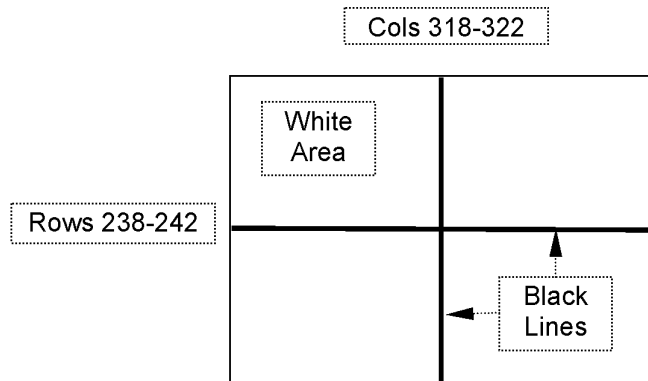

TEST PATTERN FOR IMAGE STICKING TEST

## 10. RELIABILITY TEST CONDITION

### (1) Temperature and Humidity

| ITEM                                        | CONDITIONS                              |
|---------------------------------------------|-----------------------------------------|
| HIGH TEMPERATURE<br>HIGH HUMIDITY OPERATION | 40°C, 90%RH, 240 h<br>(No condensation) |
| HIGH TEMPERATURE OPERATION                  | 70°C, 240 h                             |
| LOW TEMPERATURE OPERATION                   | -20°C, 240 h                            |
| HIGH TEMPERATURE STORAGE                    | 80°C, 240 h                             |
| LOW TEMPERATURE STORAGE                     | -20°C, 240 h                            |
| THERMAL SHOCK (NON-OPERATION)               | -20°C (1h) ~ 80°C(1h),<br>100 cycles    |

### (2) Shock & Vibration

| ITEM                         | CONDITIONS                                                                                                                                                                                                                                      |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SHOCK<br>(NON-OPERATION)     | Shock level: 1470m/s <sup>2</sup> (150G)<br>Waveform: half sinusoidal wave, 2ms<br>Number of shocks: one shock input in each direction of three mutually perpendicular axis for a total of six shock inputs                                     |
| VIBRATION<br>(NON-OPERATION) | Vibration level: 9.8m/s <sup>2</sup> (1.0G)<br>Waveform: sinusoidal<br>Frequency range: 5 to 500Hz<br>Frequency sweep rate: 0.5 octave /min<br>Duration: one sweep from 5 to 500 Hz in each of three mutually perpendicular axis(total 3 hours) |

### (3) Judgment standard

The judgment of the above tests should be made as follow:

Pass: Normal display image, no damage of the display function. (ex. no line defect)

Partial transformation of the module parts should be ignored.

Fail: No display image, damage of the display function. (ex. line defect)

|                       |                    |            |
|-----------------------|--------------------|------------|
| T-55532D104J-LW-A-ABN | OPTREX CORPORATION | Page 17/33 |
|-----------------------|--------------------|------------|