


16BIT SHIFT REGISTER, LATCH & CONSTANT CURRENT DRIVERS

The TB62701N is specifically designed for LED and LED-DISPLAY constant current drivers.

This constant current output circuit is able to set up external resister ($I_{OUT} = 0$ to 50mA).

This IC is monolithic integrated circuit designed to be used together with Bi-CMOS process.

The devices consist of 16bit Shift Register, Latch, AND-GATE and Constant Current Driver.

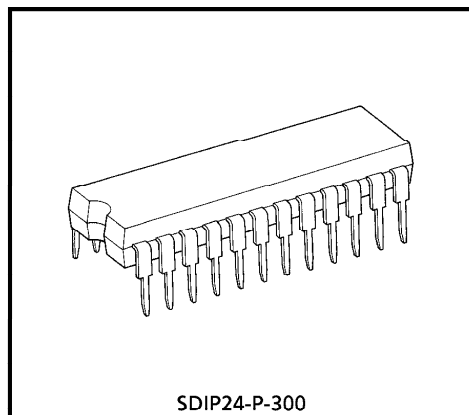

Weight : 1.2g (Typ.)


FEATURES

- OUTPUT CURRENT : Set-up at 0 to 50mA with an external resister.
- A LITTLE CHANGE OF OUTPUT CURRENT ($T_a = 25^\circ\text{C}$, $V_{DD} = 5.0\text{V}$)


OUT-GND VOLTAGE	A LITTLE CHANGE OF CHANNEL	I_{OUT} [mA]
$\geq 0.4\text{V}$	$\pm 7\%$	0~50mA
$\geq 0.7\text{V}$		

- 5V CMOS Compatible Input
- PACKAGE : SDIP-24 (SDIP24-P-300)
- MAXIMUM CLOCK FREQUENCY : $f_{MAX} = 2.5\text{MHz}$ (cascade operation, $T_a = 25^\circ\text{C}$)


PIN CONNECTION (TOP VIEW)

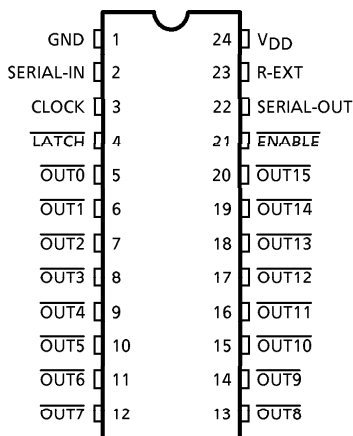

BLOCK DIAGRAM

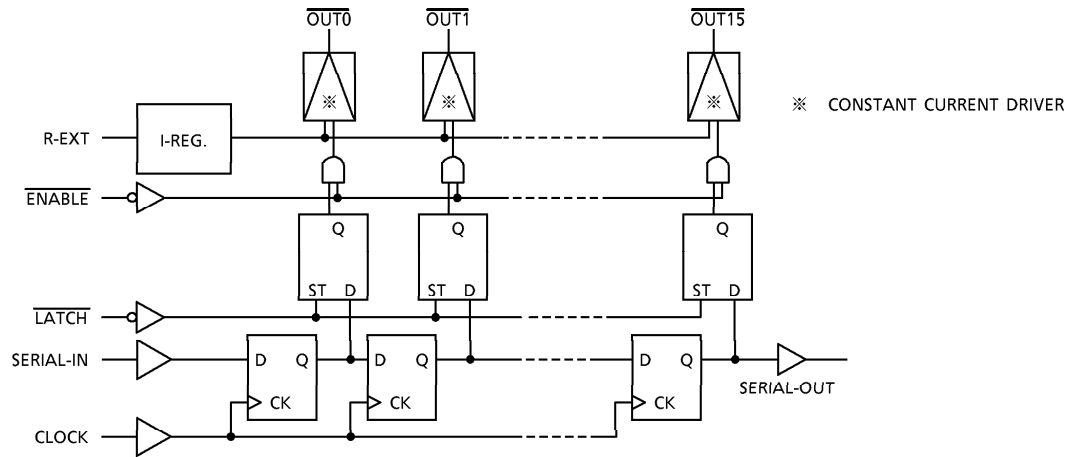

TIMING DIAGRAM

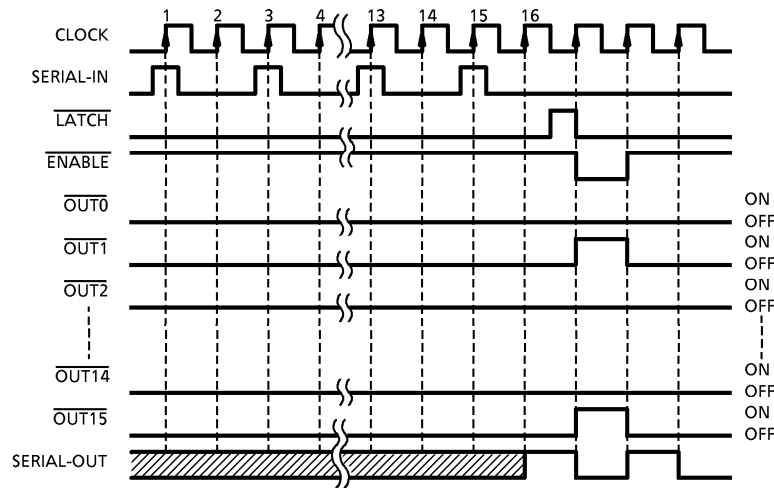

TERMINAL DESCRIPTION

PIN No.	PIN NAME	FUNCTION
1	GND	GND terminal for control logic driver
2	SERIAL-IN	Serial data input terminal for shift register
3	CLOCK	Clock input terminal for data shift to up-edge
4	LATCH	"H" level : data through, "L" level : data hold
24	V _{DD}	Supply voltage terminal
5~12 13~20	OUT _n	Output terminals
21	ENABLE	"H" level output off, "L" level : latch data = "H" level then output on, latch data = "L" level then output off
22	SERIAL-OUT	Serial data output terminal for shift register
23	R-EXT	The register which connects between R-EXT and GND sets the constant output current.


TRUTH TABLE

INPUT				OUTPUT OUT _n (t = n)			
CLOCK	LATCH	ENABLE	SERIAL-IN	OUT ₀ ... OUT ₇	OUT ₁₅	SERIAL-OUT	
	H	L	D _n	D _n	D _{n-7} D _{n-15}	D _{n-15}	D _{n-15}
	L	L	D _n	No change			D _{n-15}
	※	H	D _n	OFF	OFF	OFF	D _{n-15}
	※	※	D _n	No change			No change


(Note) D_n~D_{n-15} = "H" then OUT_n is ON, "L" then OUT_n is OFF.

EQUIVALENT CIRCUIT OF INPUTS AND OUTPUTS


1. ENABLE terminal

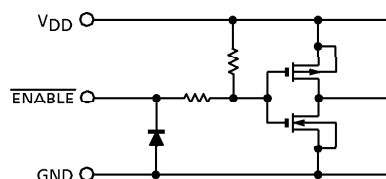


2. LATCH terminal

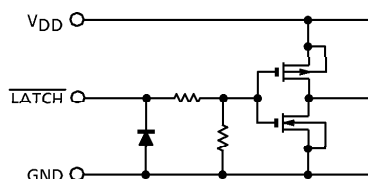

3. CLOCK, SERIAL-IN terminal

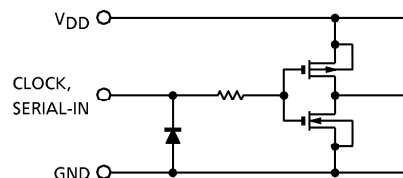

4. SERIAL-OUT terminal

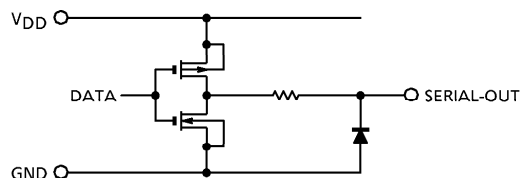

MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Supply Voltage	V _{DD}	0~7.0	V
Output Voltage	V _{CE}	-0.5~30	V
Output Current	I _{OUT}	50	mA
Input Voltage	V _{IN}	-0.4~V _{DD} +0.4	V
GND Terminal Current	I _{GND}	800	mA
Clock Frequency	f _{CK}	2.5	MHz
Power Dissipation	P _D	1.78	W
Operating Temperature	T _{opr}	-40~85	°C
Storage Temperature	T _{stg}	-55~150	°C

(Note) Ambient temperature delated above 25°C in the proportion of 14.2mW/°C.

RECOMMENDED OPERATING CONDITION (Ta = -40~85°C unless otherwise noted)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Voltage		V _{DD}	—	4.5	5.0	5.5	V
Output Voltage		V _{OUT}	—	—	—	30.0	—
Output Current	OUTn	I _{OUT}	DC 1 circuit	—	—	45	mA
	S-OUT	I _{OH}	—	—	—	− 1.0	
		I _{OL}	—	—	—	1.0	
Input Voltage		V _{IN}	—	0	—	V _{DD}	V
Data Set Up Time		t _{setup} (D)	—	100	—	—	ns
Data Hold Time		t _{hold} (D)	—	20	—	—	ns
Latch Set Up Time		t _{setup} (L)	—	300	—	—	ns
Latch Hold Time		t _{hold} (L)	—	100	—	—	ns
Clock Pulse Width	t _w CLK	—	100	—	—	ns	
	t _w $\overline{\text{CLK}}$	—	100				
Latch Pulse Width	t _w LAT	—	300	—	—	ns	
	t _w $\overline{\text{LAT}}$	—	300				
Clock Frequency		f _{CK}	Cascade operation	—	—	2.0	MHz
Power Dissipation		P _D	Ta = 85°C	—	—	0.72	W

ELECTRICAL CHARACTERISTICS ($V_{DD} = 5.0V$, $T_a = 25^\circ C$ unless otherwise noted)


CHARACTERISTIC		SYMBOL	TEST CIR- CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input Voltage	“H” level	V _{IH}	—	—	70%V _{DD}	—	V _{DD}	V
	“L” level	V _{IL}	—	—	GND	—	30%V _{DD}	
Output Leakage Current		I _{OH}	—	V _{OH} = 30V	—	—	10	μA
Output Voltage	S-OUT	V _{OL}	—	I _{OL} = + 1.0mA	—	—	0.4	V
		V _{OH}	—	I _{OH} = - 1.0mA	4.6	—	—	
Output Current 1		I _{OL1}	—	V _{CE} = 0.7V R _{EXT} = 560Ω	35.2	41.5	47.7	mA
		I _{OL2}	—	V _{CE} = 0.4V (include ΔI _{OL1})				
	Delta I _{OUT}	ΔI _{OL1}	—	R _{EXT} = 560Ω I _{OUT} = 40mA, V _{CE} = 0.4V	—	± 3.0	± 7.0	%
Supply Voltage Regulation		% / V _{DD}	—	R _{EXT} = 560Ω	—	18	—	% / V
Reference Voltage		V _{ref}	—	R _{EXT} = 560Ω, Ta = - 40~85°C	—	1.26	—	V
Pull Up / Down Resister		R _{IN}	—	—	100	200	400	kΩ
Supply Current	“OFF”	I _{DD} (off) 1	—	R _{EXT} = OPEN, OUTn = Off	—	0.4	0.6	mA
		I _{DD} (off) 2	—	R _{EXT} = 560Ω, OUTn = Off	—	6.5	10.0	
	“ON”	I _{DD} (on)	—	R _{EXT} = 560Ω, OUTn = Off	—	13.5	20.0	

SWITCHING CHARACTERISTICS (Ta = 25°C unless otherwise noted)


CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Propagation Delay Time ("L" to "H")	CK-S-OUT	t _{pLH}	V _{DD} = 5.0V V _{CE} = 1.0V V _{IH} = V _{DD} V _{IL} = GND f _{CK} = 2MHz R _{EXT} = 560Ω I _{OUT} = 30mA	—	95	500	ns
	CK-OUT _n			—	130	500	
	LATCH-OUT _n			—	130	500	
	EN-OUT _n			—	130	500	
Propagation Delay Time ("H" to "L")	CK-S-OUT	t _{pHL}		—	95	720	ns
	CK-OUT _n			—	130	500	
	LATCH-OUT _n			—	130	500	
	EN-OUT _n			—	130	500	
Maximum Clock Frequency		f _{MAX} (*1)		2.0	—	2.5	MHz
Minimum Pulse Width	CK	t _w CK		—	45	80	ns
	LATCH	t _w LAT		—	10	50	
Data Set Up Time		t _{setup} (D)		—	17	50	ns
Data Hold Time		t _{hold} (D)		—	−7	10	
Latch Set Up Time	LH	t _{LATsetup}		—	70	200	ns
	HL			—	70	200	
Latch Hold Time	LH	t _{LAThold}		—	−70	50	ns
	HL		—	−70	50		
Maximum Clock Rise Time		t _r	—	—	10	μs	
Maximum Clock Fall Time		t _f	—	—	10		
Maximum Output Rise Time		t _{or}	—	35	80	ns	
Maximum Output Fall Time		t _{of}	—	40	80		

*1 : Cascade operation

DC CHARACTERISTIC TEST CIRCUIT

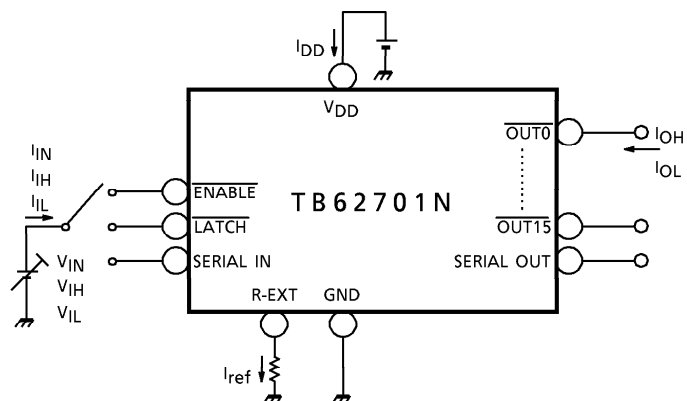


AC CHARACTERISTIC TEST CIRCUIT

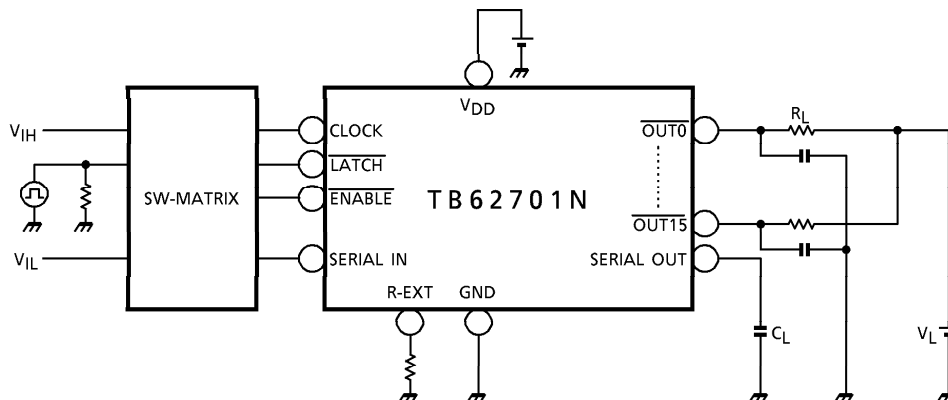


TIMING WAVE FORM


1. CLOCK-SERIAL OUT, $\overline{\text{OUTn}}$





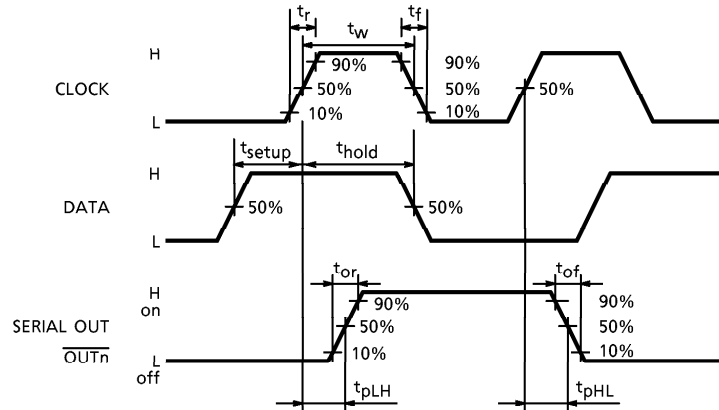


2. CLOCK-LATCH

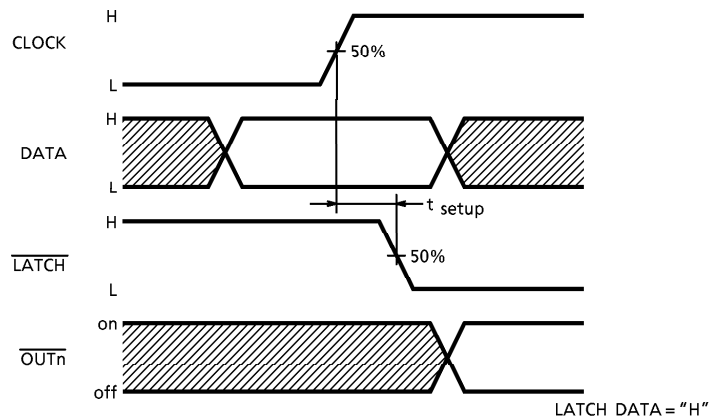


3. $\overline{\text{ENABLE}}$

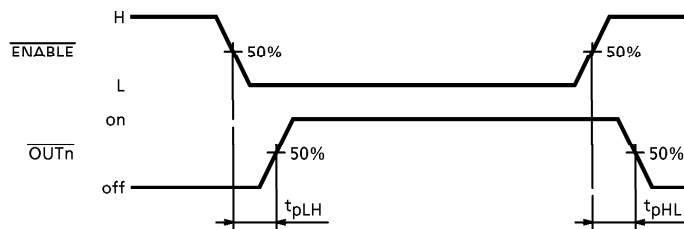

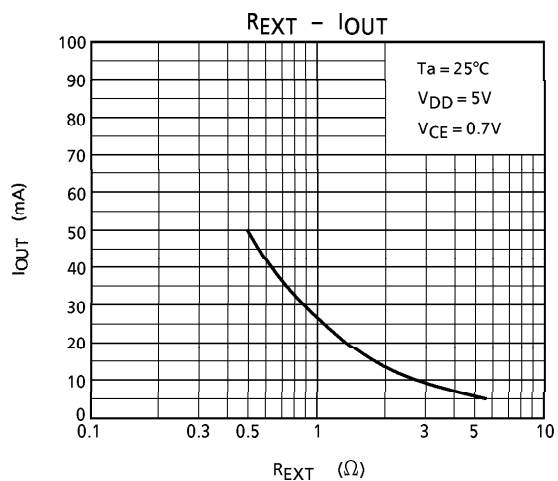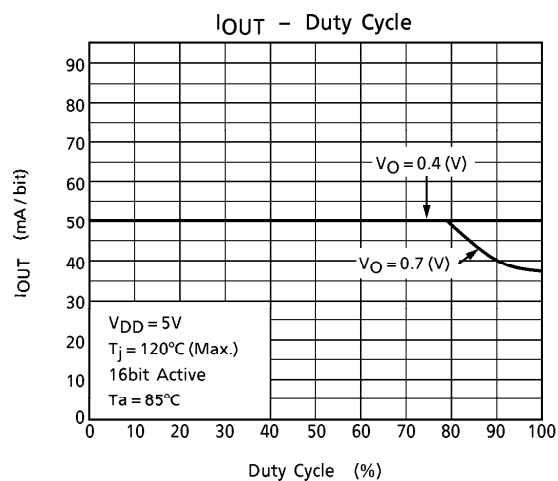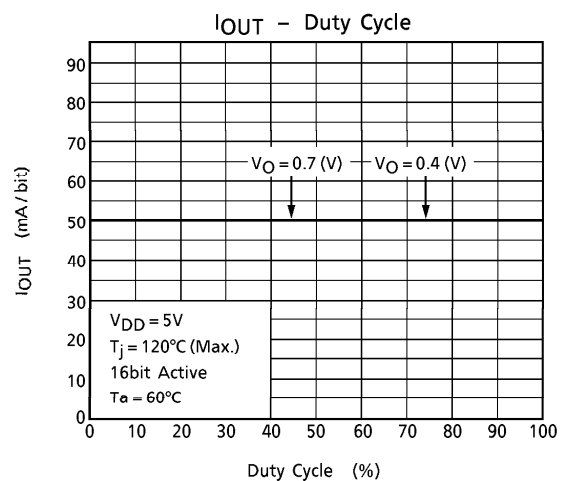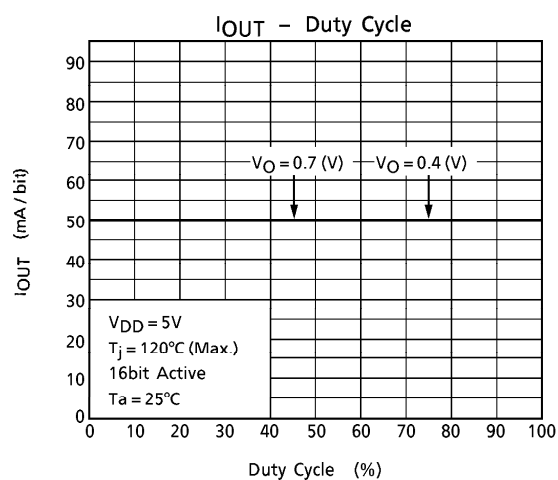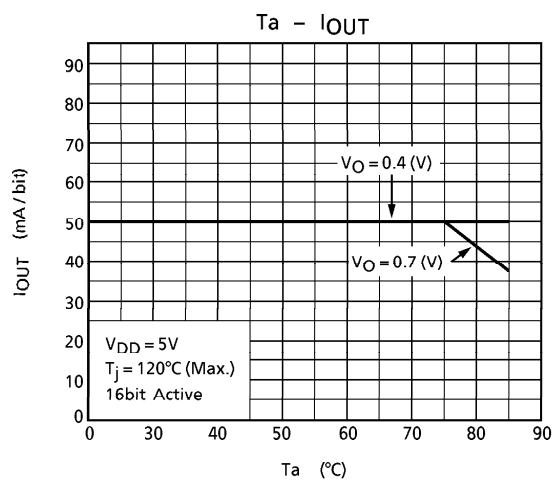


APPLICATION CIRCUIT

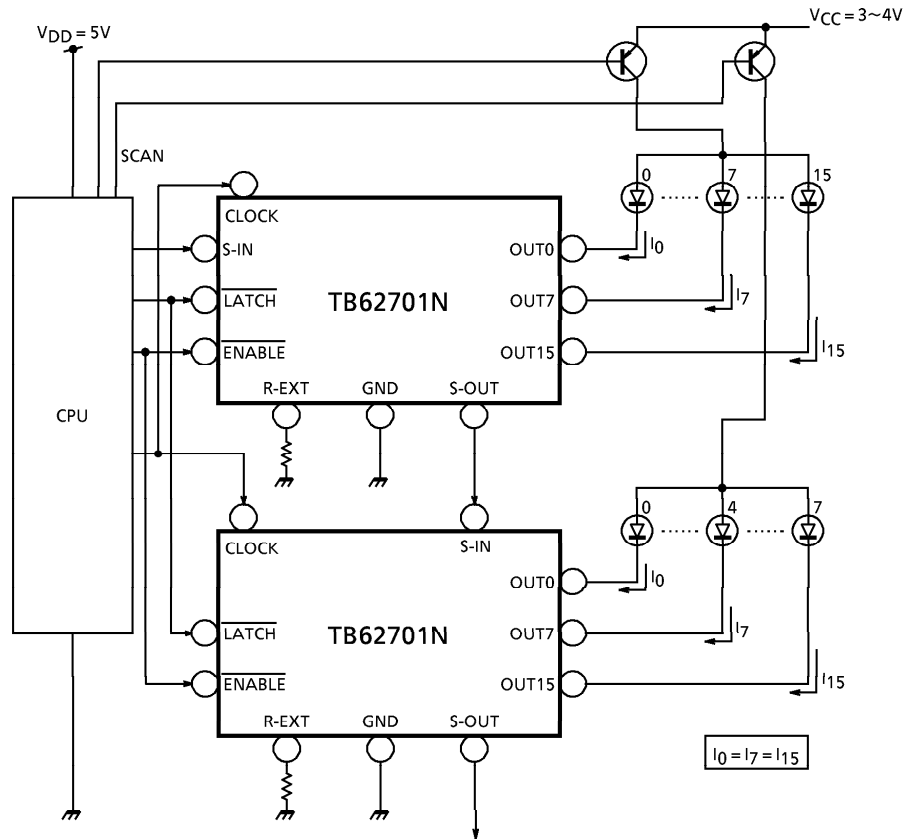

OUTLINE DRAWING
SDIP24-P-300

Unit : mm

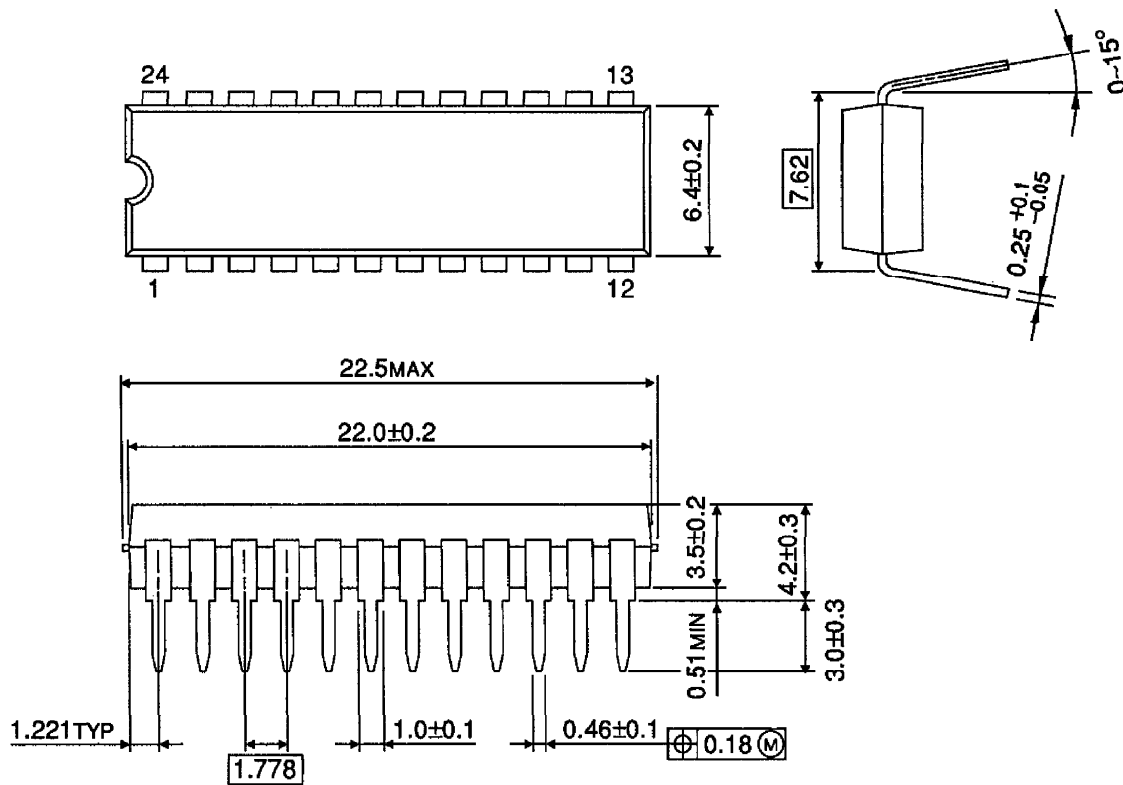

Weight : 1.2g (Typ.)