



VERSION	CHANGE CONTENT	DATE
V00	FIRST ISSUE	2013-07-09

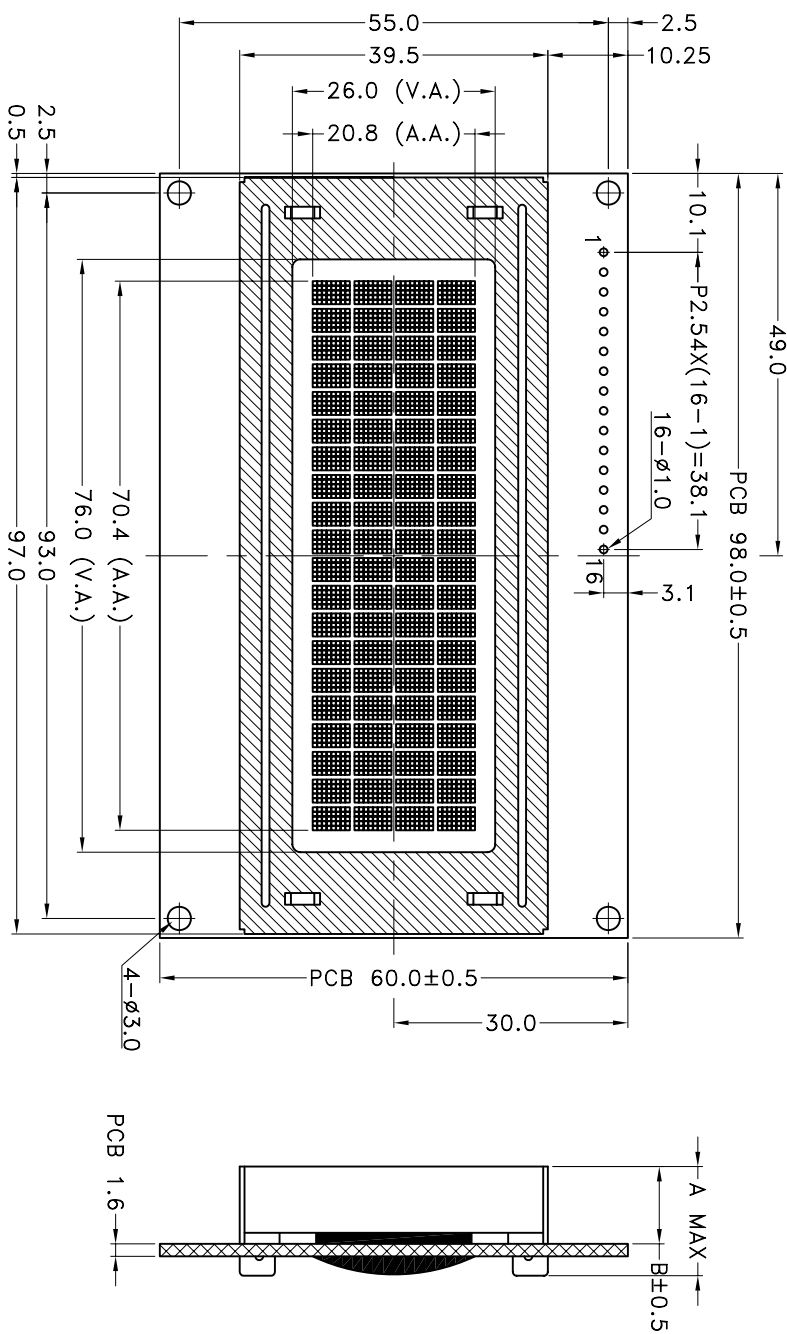

TYPE	A	B
LED B/L	14.5	9.9

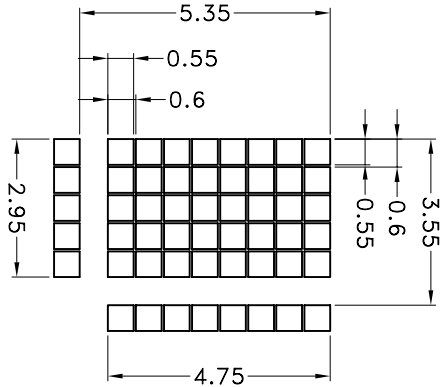

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
NAME	VSS	VDD	VO	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LED+	LED-

DOTS DETAIL
SCALE 6:1

SPECIFICATIONS

1. DISPLAY TYPE: STN/TRANSMISSIVE/NEGATIVE/BLUE

2. LCD DRIVING VOLTAGE: 4.7V

3. LOGIC VOLTAGE: 5.0V

4. VIEWING DIRECTION: 6 O'CLOCK

5. OPERATING TEMP: -10° C~+60° C

6. STORANGE TEMP: -20° C~+70° C

7. DRIVE MODE: 1/16 DUTY,1/5 BIAS

8. BACKLIGHT: WHITE/SIDE BACKLIGHT/5.0V

9. OTHER:

MECHANICAL TOL.±0.2 UNLESS SPECIFIED

NOTE:

DESCRIPTION:

C/D

SCALE: FIT

SHEET: 1 OF 1

TINSHARP INDUSTRIAL CO.,LTD.

UNIT: mm

PROJECTION

MODEL

TIC2004A-03A

SERIAL NUMBER

JULY0462

APP:

CHK:

DATE:

DWN:

DATE: