

VI TELEFILTER**Filter specification****TFS 117****1/5****Measurement condition**

Ambient temperature:	23	°C
Input power level:	0	dBm
Terminating impedance: *		
Input:	288 Ω	-22.2 pF
Output:	258 Ω	-22.6 pF

Characteristics**Remark:**

The reference level for the relative attenuation a_{rel} of TFS117 is the minimum of the pass band attenuation a_{min} . This value is defined as the insertion loss a_e . The centre frequency f_C is the arithmetic mean value of the upper and lower frequencies at the 3 dB filter attenuation level relative to the insertion loss a_e . The given values for the relative attenuation a_{rel} and the group delay ripple have to be reached at the frequencies given below, even if the centre frequency f_C is shifted due to the temperature coefficient of frequency TC_f in the operating temperature range and due to a production tolerance for the centre frequency f_C .

D a t a		typ. value		tolerance / limit	
Insertion loss (reference level)	a_e	5,0	dB	max.	8 dB
Nominal frequency	f_N	-		117,4	MHz
Centre frequency		117,4	MHz	-	
Pass band ripple	within $f_N \pm 90$ kHz	0,5	dB	max.	1 dB
Relative attenuation	a_{rel}				
f_N	$f_N \pm 90$ kHz	0,5	dB	max.	1 dB
$f_N \pm 90$ kHz	$f_N \pm 200$ kHz	0,5	dB	max.	3 dB
$f_N \pm 1,8$ MHz	$f_N \pm 6$ MHz	30	dB	min.	20 dB
$f_N \pm 6$ MHz	$f_N \pm 30$ MHz	42	dB	min.	35 dB
$f_N + 30$ MHz	$f_N + 200$ MHz	52	dB	min.	20 dB
$f_N - 30$ MHz	$f_N - 115$ MHz	52	dB	min.	20 dB
Group delay	at f_N	800	ns	max.	1 μ s
Group delay ripple	$f_N \pm 90$ kHz	100	ns	max.	1 μ s
Temperature coefficient of frequency (TC_f) *)		- 18	ppm/K	-	
Operating temperature range		-		- 10 °C ... + 85 °C	
Storage temperature range		-		- 40 °C ... + 85 °C	
Input power level :				max.	10 dBm

*) The terminating impedances depend on parasitics and q-values of matching elements and the board used, and are to be understood as reference values only. Should there be additional questions do not hesitate to ask for an application note or contact our design team.

**) $\Delta f_C(\text{Hz}) = TC_f(\text{ppm/K}) \times (T - T_o) \times f_{CAT}(\text{MHz})$

generated: _____


checked / approved: _____

TELEFILTER GmbH
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: fft@telefilter.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

VI TELEFILTER**Filter specification****TFS 117****2/5****Construction and pin connection**


(All dimensions in mm)

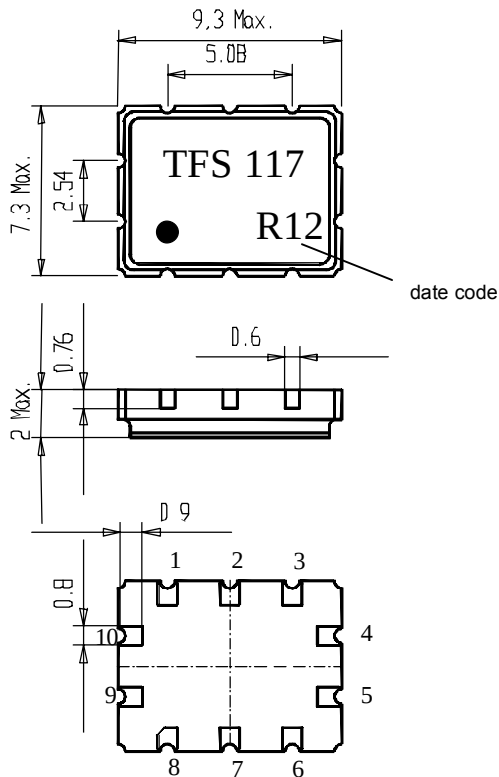

1	Output
2	Ground
3	Ground
4	Ground
5	Ground
6	Input
7	Ground
8	Ground
9	Ground
10	Ground

date code	year + month
N	2001
P	2002
R	2003
...	

www.DataSheet4U.com

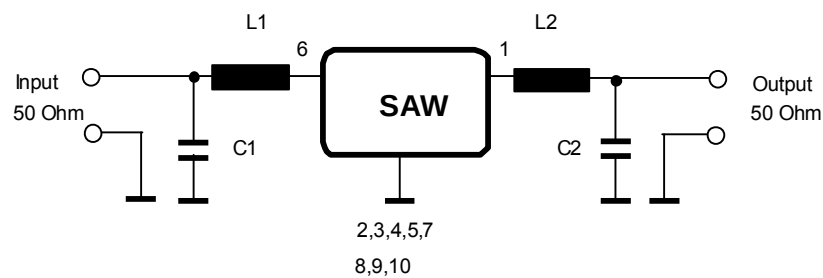50 Ω matching network:

TELEFILTER GmbH
 Potsdamer Straße 18
 D 14 513 TELTOW / Germany
 Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
 E-Mail: tft@telefilter.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

VI TELEFILTER**Filter specification****TFS 117****3/5****Stability characteristics**

After the following tests the filter shall meet the whole specification:

1. Shock: 500g, 18 ms, half sine wave, 3 shocks each plane;
DIN IEC 68 T2 - 27
2. Vibration: 10 Hz to 500 Hz, 0,35 mm or <VIBRATIONACCEL> g respectively, 1 octave per min, 10 cycles per
plan, 3 plans;
DIN IEC 68 T2 - 6
3. Change of
temperature: -55 °C to 125°C / 30 min. each / 10 cycles
DIN IEC 68 part 2 – 14 Test N
4. Resistance to
solder heat (reflow): reflow possible: twice max.;
for temperature conditions refer to the attached "Air reflow temperature conditions" on page 4;


Packing

Tape & Reel: IEC 286 – 3, with exception of value for N and minimum bending radius;
tape type II, embossed carrier tape with top cover tape on the upper side;

max. pieces of filters per reel:	2000
reel of empty components at start:	min. 300 mm
reel of empty components at start including leader:	min. 500 mm
trailer:	min. 300 mm

Tape (all dimensions in mm)


W : 16,00 ± 0,3
Po : 4,00 ± 0,1
Do : 1,50 +0,1/-0
E : 1,75 ± 0,1
F : 7,50 ± 0,1
G(min) : 0,60
P2 : 2,00 ± 0,1
P1 : 12,00 ± 0,1
D1(min) : 1,50
Ao : 7,60 ± 0,1
Bo : 9,60 ± 0,1
Ct : 13,5 ± 0,1

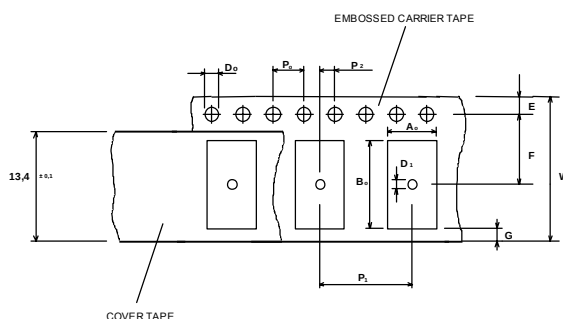

www.DataSheet4U.com

Reel (all dimensions in mm)

A : 330
W1 : 16,4 +2/-0
W2(max) : 22,4
N(min) : 60
C : 12,8 ± 0,1

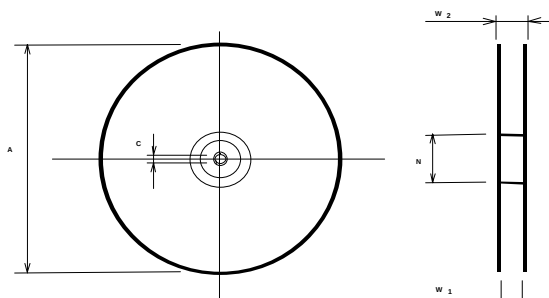

The minimum bending radius is 45 mm. The mounting surface of the filters faces the bottom side of the embossed carrier tape. Marking of the filters can be read if the upper side of the carrier tape is regarded with the sprocket holes on the right.

TELEFILTER GmbH**Potsdamer Straße 18****D 14 513 TELTOW / Germany****Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30****E-Mail: ftt@telefilter.com**

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

VI TELEFILTER**Filter specification****TFS 117****4/5****Air reflow temperature conditions**

1st and 2nd air reflow profile

Name:	pre-heating periods	main-heating periods	peak temperature
Temperature:	150 °C - 170 °C	over 200 °C	255 °C ± 5 °C
Time:	60 sec. - 90 sec.	20 sec. - 25 sec.	

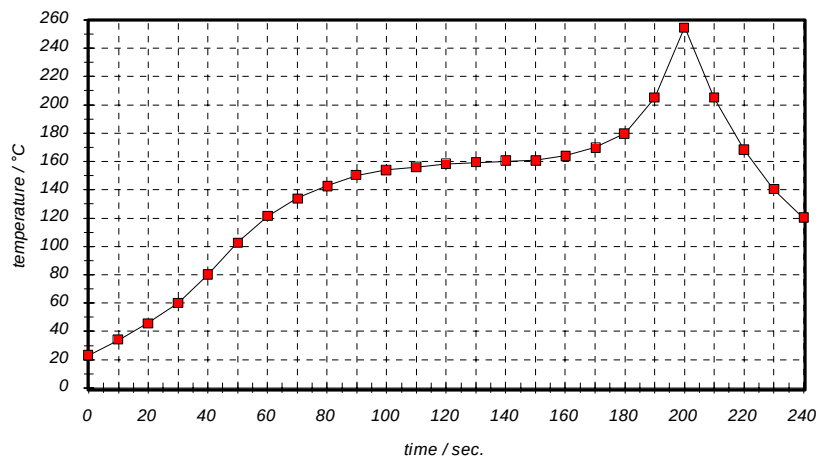
Chip-mount air reflow profile

Table for temperature vs. time during the air reflow process

Tolerance of temperatures: ± 5 °C

time / sec.	temperature / °C	time / sec.	temperature / °C
0	23	140	160
10	34	150	161
20	46	160	164
30	60	170	170
40	80	180	180
50	103	190	205
60	121	195	230
70	134	200	255
80	143	205	230
90	150	210	205
100	154	215	180
110	156	220	165
120	158	230	140
130	159	240	120

VI TELEFILTER**Filter specification****TFS 117****5/5****History****Version Reason of Changes****Name****Date****Filter specification**

2.0 - terminating impedances and typical values added

Steiner

21.03.2003