

VI TELEFILTER**Filter specification****TFS 1200****1/5****Measurement condition**

Ambient temperature:	23	°C
Input power level:	0	dBm
Terminating impedance: *		
Input:	168Ω //	-1,0pF
Output:	168Ω //	-1,0pF

Characteristics**Remark:**

The reference level for the relative attenuation a_{rel} of the TFS 1200 is the minimum of the pass band attenuation a_{min} . The minimum of the pass band attenuation a_{min} is defined as the insertion loss a_e . The centre frequency f_c is the arithmetic mean value of the upper and lower frequencies at the 3 dB filter attenuation level relative to the insertion loss a_e . The nominal frequency f_N is fixed at 1200,0 MHz without any tolerance. The given values for both the relative attenuation a_{rel} and the group delay ripple have to be achieved at the frequencies given below even if the centre frequency f_c is shifted due to the temperature coefficient of frequency TC_f in the operating temperature range and due to a production tolerance for the centre frequency f_c .

D a t a		typ. value		tolerance / limit	
Insertion loss (reference level)	a_e	3,25	dB	max.	6,0 dB
Nominal frequency	f_N	-		1200,0	MHz
Centre frequency	f_c	1200,0	MHz	-	
Passband	PB	-		f_N	$\pm 100,0$ kHz
Pass band ripple	p-p	0,3	dB	max.	1,0 dB
Relative attenuation	a_{rel}				
f_N	...	$f_N \pm 0,1$	MHz	0,3	dB
$f_N \pm 3$	MHz	...	$f_N \pm 6$	MHz	20 dB
$f_N \pm 6$	MHz	...	$f_N \pm 17$	MHz	28 dB
$f_N + 17$	MHz	...	$f_N + 30$	MHz	33 dB
$f_N + 30$	MHz	...	$f_N + 180$	MHz	43 dB
$f_N - 17$	MHz	...	$f_N - 1150$	MHz	39 dB
Group delay ripple within PB		19	ns	max.	100 ns
Input power level		26	dBm	max.	15 dBm
Operating temperature range	OTR	-		- 40 °C ... + 85 °C	
Storage temperature range		-		- 45 °C ... + 90 °C	
Frequency inversion temperature		40	°C	-	
Temperature coefficient of frequency	TC_f **	0,05	ppm/K ²	-	

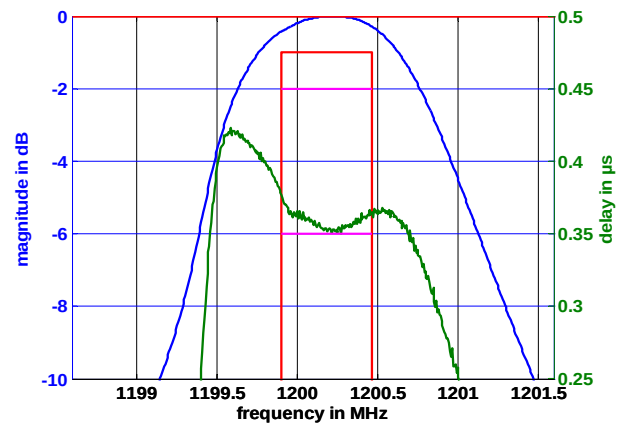
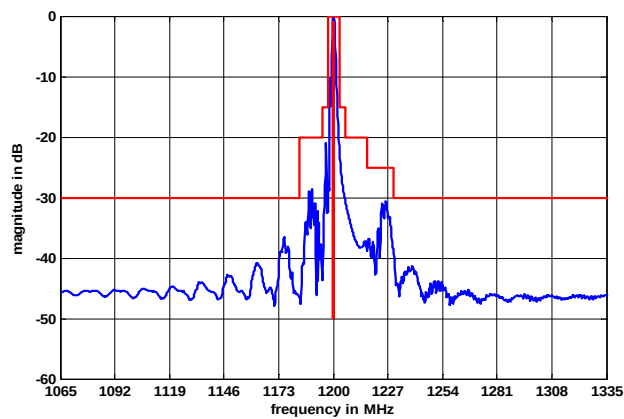
*) The terminating impedances depend on parasitics and q-values of matching elements and the board used, and are to be understood as reference values only. Should there be additional questions do not hesitate to ask for an application note or contact our design team.

**) $\Delta f(\text{Hz}) = TC_f(\text{ppm/K}^2) \times (T - T_0)^2 \times f_{T0}(\text{MHz})$

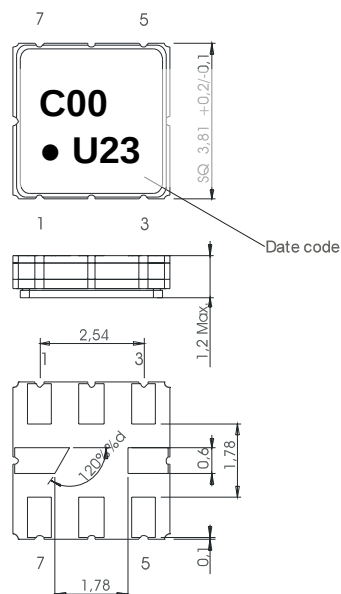
Generated:**Checked / Approved:**

Tele Filter GmbH
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: tft@telefilter.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

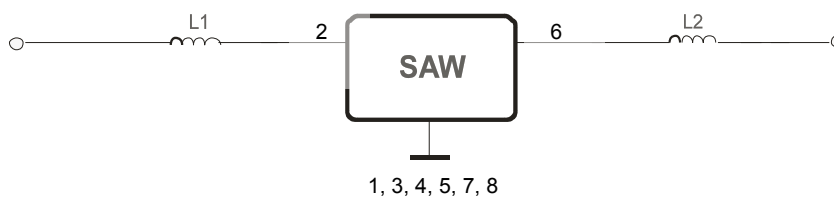
VI TELEFILTER**Filter specification****TFS 1200****2/5****Filter characteristic****Construction and pin connection**

(All dimensions in mm)



1	Ground
2	Input
3	Ground
4	Ground
5	Ground
6	Output
7	Ground
8	Ground

Date code:	Year + week
U	2006
V	2007
W	2008
...	

50 Ohm Test circuit**VI TELEFILTER**

Potsdamer Straße 18

D 14 513 TELTOW / Germany

Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30

E-Mail: tft@telefilter.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information

VI TELEFILTER**Filter specification****TFS 1200****3/5****Stability characteristics**

After the following tests the filter shall meet the whole specification:

1. Shock: 500g, 1 ms, half sine wave, 3 shocks each plane;
DIN IEC 68 T2 - 27
2. Vibration: 10 Hz to 500 Hz, 0,35 mm or 5 g respectively, 1 octave per min, 10 cycles per plan, 3 plans;
DIN IEC 68 T2 - 6
3. Change of temperature: -55 °C to 125°C / 30 min. each / 10 cycles
DIN IEC 68 part 2 – 14 Test N
4. Resistance to solder heat (reflow): reflow possible: twice max.;
for temperature conditions refer to the attached "Air reflow temperature conditions" on page 4;

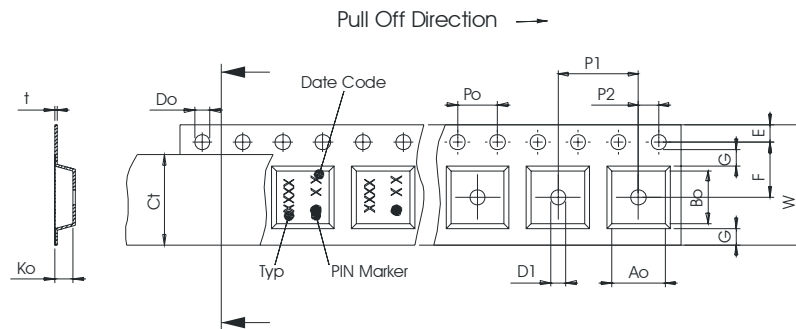
Packing

Tape & Reel: IEC 286 – 3, with exeption of value for N and minimum bending radius;
tape type II, embossed carrier tape with top cover tape on the upper side;

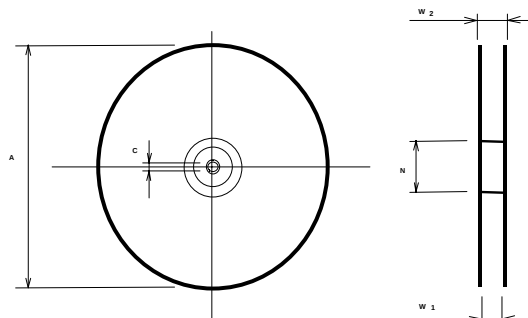
max. pieces of filters peer reel:	3000
reel of empty components at start:	min. 300 mm
reel of empty components at start including leader:	min. 500 mm
trailer:	min. 300 mm

Tape (all dimensions in mm)

W	: 12,00 ± 0,3
Po	: 4,00 ± 0,1
Do	: 1,50 +0,1/-0
E	: 1,75 ± 0,1
F	: 5,50 ± 0,05
G(min)	: 0,75
P2	: 2,00 ± 0,05
P1	: 8,00 ± 0,1
D1(min)	: 1,50
Ao	: 4,30 ± 0,1
Bo	: 4,30 ± 0,1
Ct	: 9,5 ± 0,1

**Reel (all dimensions in mm)**

A	: 330
W1	: 12,4 +2/-0
W2(max)	: 18,4
N(min)	: 50
C	: 13,0 +0,5/-0,2



The minimum bending radius is 45 mm.

VI TELEFILTER

Potsdamer Straße 18

D 14 513 TELTOW / Germany

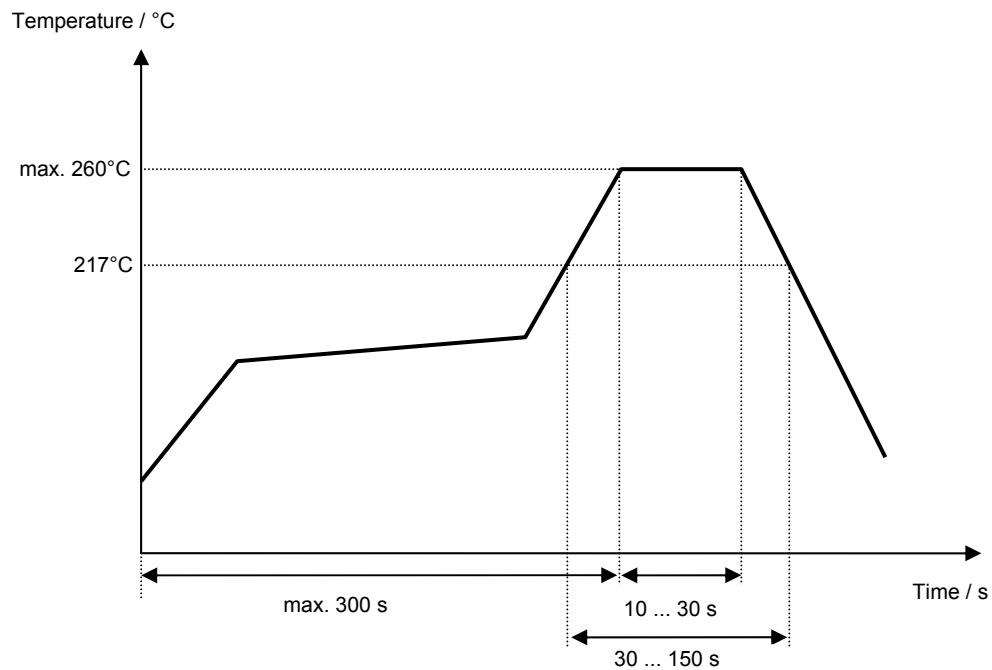
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30

E-Mail: tft@telefilter.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information

Air reflow temperature conditions

Conditions	Exposure
Average ramp-up rate (30°C to 217°C)	less than 3°C/second
> 100°C	between 300 and 600 seconds
> 150°C	between 240 and 500 seconds
> 217°C	between 30 and 150 seconds
Peak temperature	max. 260°C
Time within 5°C of actual peak temperature	between 10 and 30 seconds
Cool-down rate (Peak to 50°C)	less than 6°C/second
Time from 30°C to Peak temperature	no greater than 300 seconds

Chip-mount air reflow profile**VI TELEFILTER**

Potsdamer Straße 18

D 14 513 TELTOW / Germany

Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30

E-Mail: tft@telefilter.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information

VI TELEFILTER**Filter specification****TFS 1200****5/5****History**

Version	Reason of Changes	Name	Date
1.0	- Generation of development specification	Strehl	13.06.2005
1.1	- Change of input power level to +15dBm	Sabah	06.07.2005
1.2	- Add of typical values and typical filter performances	Sabah	06.07.2005
1.3	- Improve limit line scheme - Change filter characteristic	Noack	09.06.2006

VI TELEFILTER**Potsdamer Straße 18****D 14 513 TELTOW / Germany****Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30****E-Mail: tft@telefilter.com**

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information