


# TGA2579-FL

## 25 Watt Ku-Band GaN Power Amplifier



### Applications

- Ku-band communications



### Product Features

- Frequency Range: 13.75 - 15.35 GHz
- Saturated Output Power: 44 dBm
- Power-added Efficiency: 30%
- Small Signal Gain: 32 dB
- Bias:  $V_d = 25\text{ V}$ ,  $I_{dq} = 1\text{ A}$ ,  $V_g = -3.4\text{ V}$  typical

### General Description

The TriQuint TGA2579-FL is a packaged Ku-band power amplifier fabricated on TriQuint's production-released, 0.25um GaN on SiC process. Operating from 13.75 to 15.35 GHz, the TGA2579-FL typically provides 44 dBm of saturated output power, 30% power-added efficiency and 32dB of small signal gain.


The TGA2579-FL features low loss ground-signal-ground (GSG) RF transitions designed to interface with a coplanar waveguide multilayer board.

Ideally suited for Ku-band communications, the TGA2579-FL supports key commercial and defense-related frequency bands.

TriQuint's 0.25um GaN on SiC process offers superior electrical performance through Ku-band while maintaining high reliability. In addition, the use of SiC substrates provides optimum thermal performance necessary for high power operation.

Lead-free and RoHS compliant.

### Functional Block Diagram

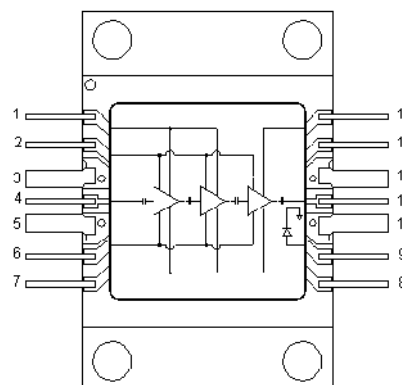

### Pin Configuration

Pin #	Symbol
1	$V_d$
2,6	$V_g$
3,5,10,12	Gnd
4	RF In
7	$V_d$
8	$V_d$
9	$V_{det}$
11	RF Out
13	N/C
14	$V_d$

### Ordering Information

Part No.	ECCN	Description
TGA2579-FL	3A001.b.2.b	Ku-band Power Amplifier

# TGA2579-FL

## 25 Watt Ku-Band GaN Power Amplifier



### Specifications

#### Absolute Maximum Ratings

Parameter	Rating
Drain to Gate Voltage, Vd - Vg	80 V
Drain Voltage, Vd	40 V
Gate Voltage, Vg	-10 to 0 V
Drain Current, Id	4.5 A
Gate Current, Ig	-18 to 18 mA
RF Input Power, CW, 50Ω, T = 25°C	27 dBm
Channel Temperature, Tch	275 °C
Mounting Temperature (30 Seconds)	260 °C
Storage Temperature	-40 to 150 °C

Operation of this device outside the parameter ranges given above may cause permanent damage. These are stress ratings only, and functional operation of the device at these conditions is not implied.

#### Recommended Operating Conditions

Parameter	Min	Typ	Max	Units
Vd		25		V
Idq (no RF drive)		1.0		A
Id_drive (under RF drive)		3.5		A
Vg		-3.4		V

Electrical specifications are measured at specified test conditions. Specifications are not guaranteed over all recommended operating conditions

### Electrical Specifications

Test conditions unless otherwise noted: 25°C, Vd = 25 V, CW, Idq = 1A, Vg = -3.4 V typical.


Parameter	Min	Typ	Max	Units
Operational Frequency Range	13.75		15.35	GHz
Small Signal Gain		32		dB
Output Power @ Saturation		44		dBm
Power-added Efficiency @ Saturation		30		%
Output TOI		48		dBm
Gain Temperature Coefficient		-0.07		dB/°C
Power Temperature Coefficient		-0.007		dB/°C

### Specifications (cont'd)

#### Thermal and Reliability Information

Parameter	Condition	Rating
Channel Temperature (Tch), Median Lifetime (Tm), Thermal Resistance*, no RF Drive	Tbase = 85 °C, Vd = 25 V, Idq = 1A, Pdis = 25 W, CW	Tch = 117 °C Tm = 1.6E+9 Hours $\theta_{JC} = 1.3\text{ }^{\circ}\text{C/W}$
Channel Temperature (Tch), Median Lifetime (Tm), Thermal Resistance*, under RF Drive	Tbase = 85 °C, Vd = 25 V, Id = 3.1A, Pout = 44 dBm, Pdis = 49W, CW	Tch = 142 °C Tm = 1.4E+8 Hours $\theta_{JC} = 1.2\text{ }^{\circ}\text{C/W}$

Median Lifetime (Tm) vs. Channel Temperature (Tch)






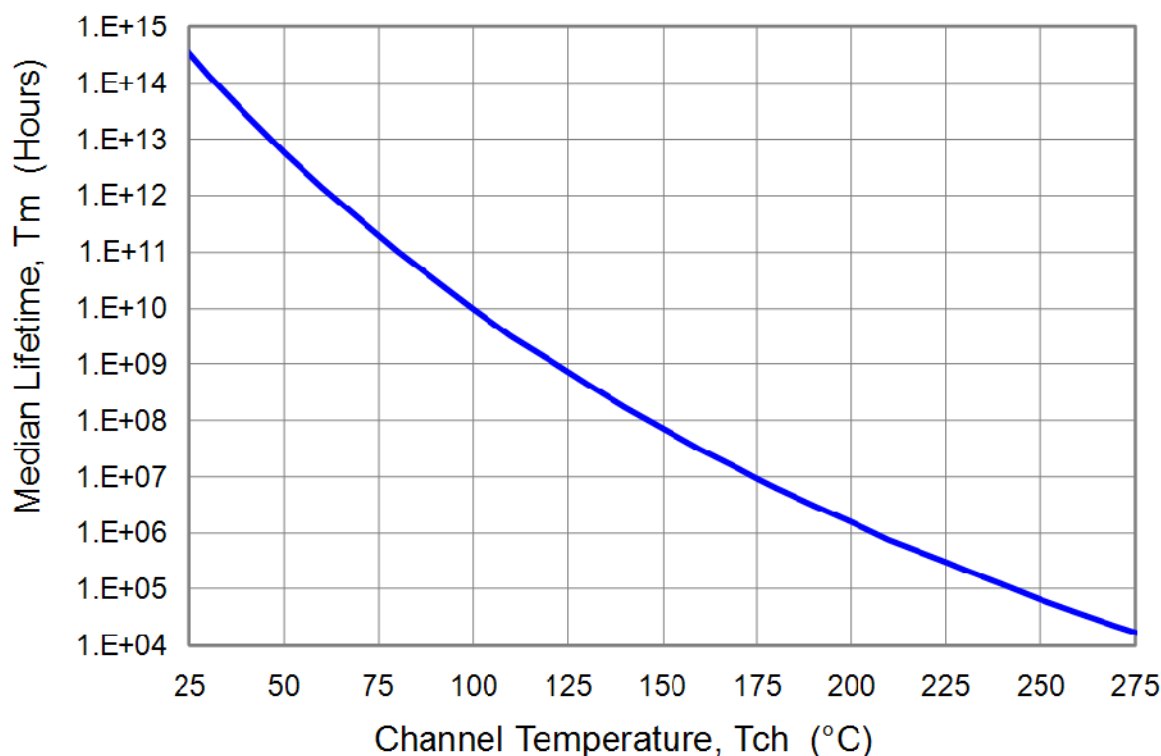


# TGA2579-FL

## 25 Watt Ku-Band GaN Power Amplifier



### Typical Performance

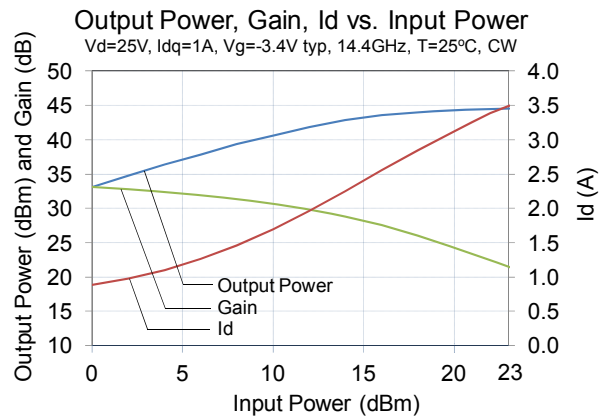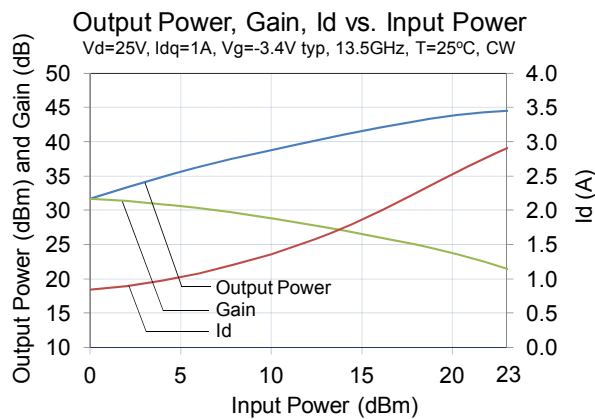
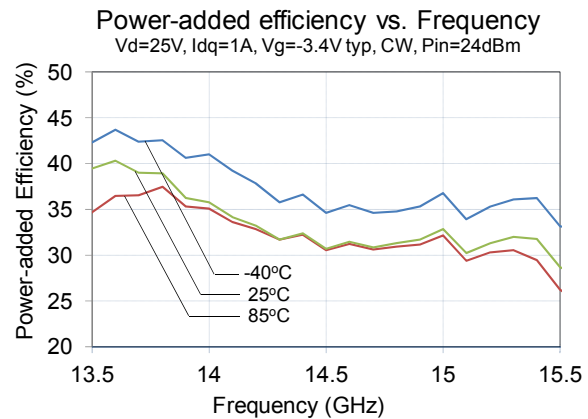
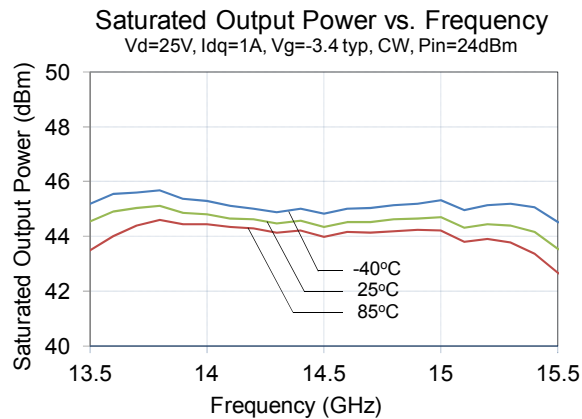
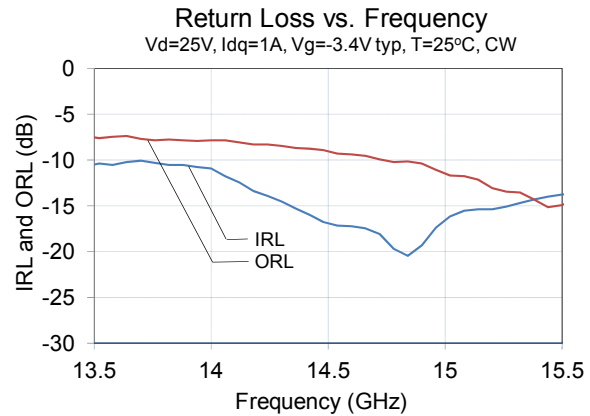
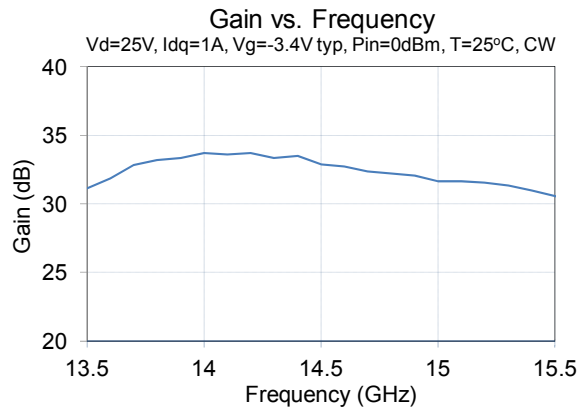


# TGA2579-FL

## 25 Watt Ku-Band GaN Power Amplifier



### Typical Performance

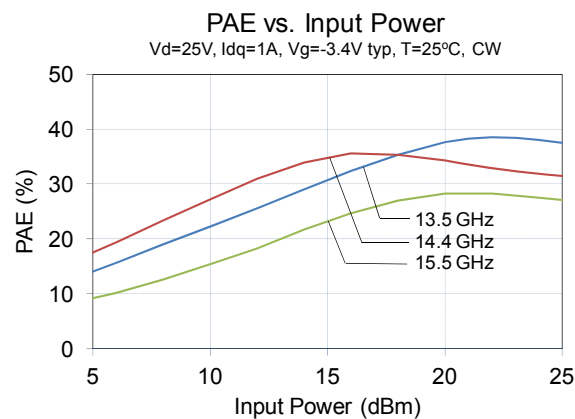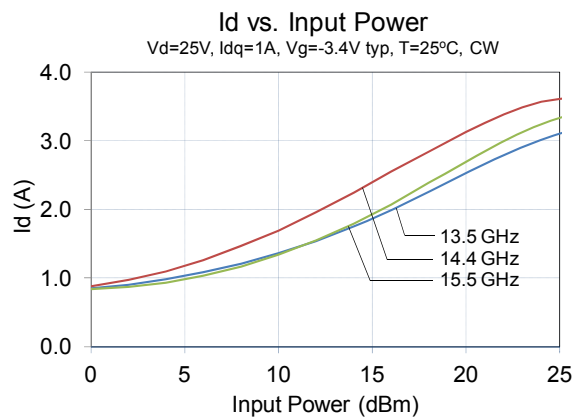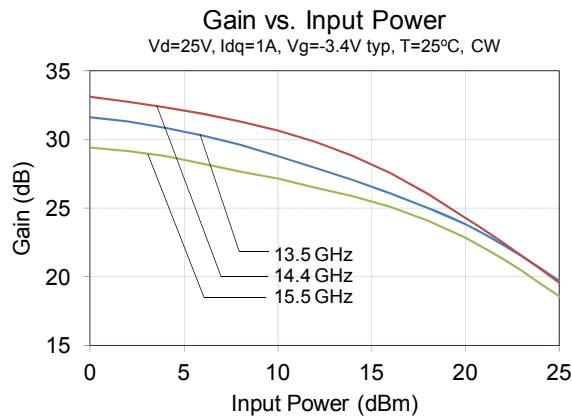
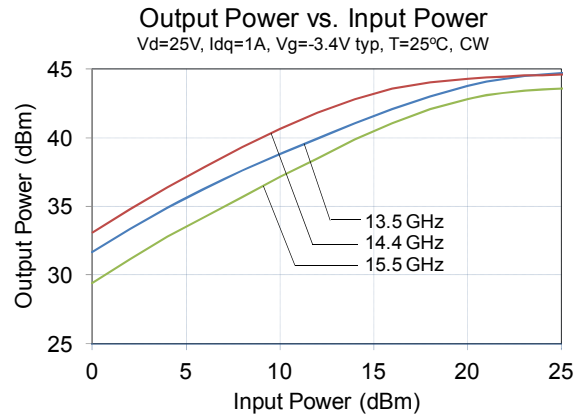
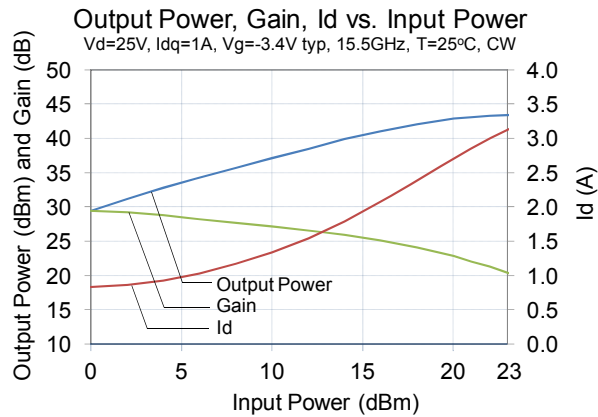


# TGA2579-FL

## 25 Watt Ku-Band GaN Power Amplifier



### Typical Performance

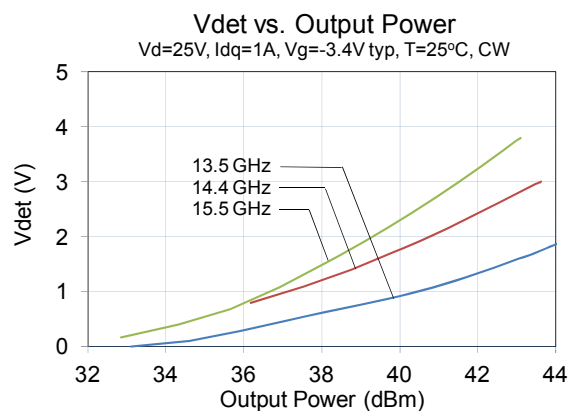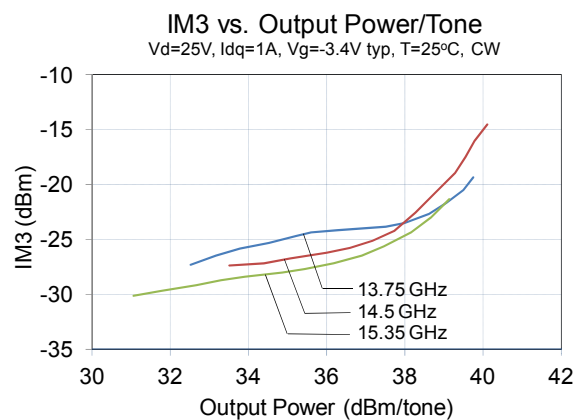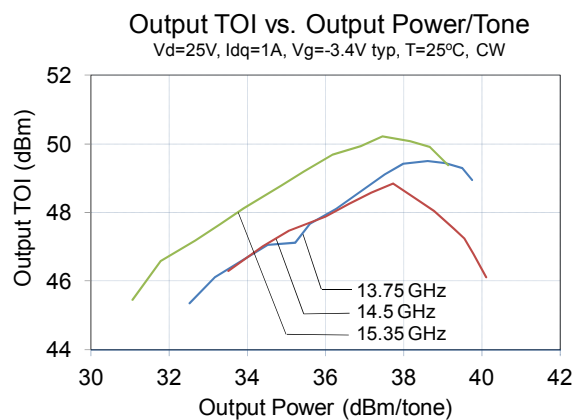


# TGA2579-FL

## 25 Watt Ku-Band GaN Power Amplifier



### Application Circuit

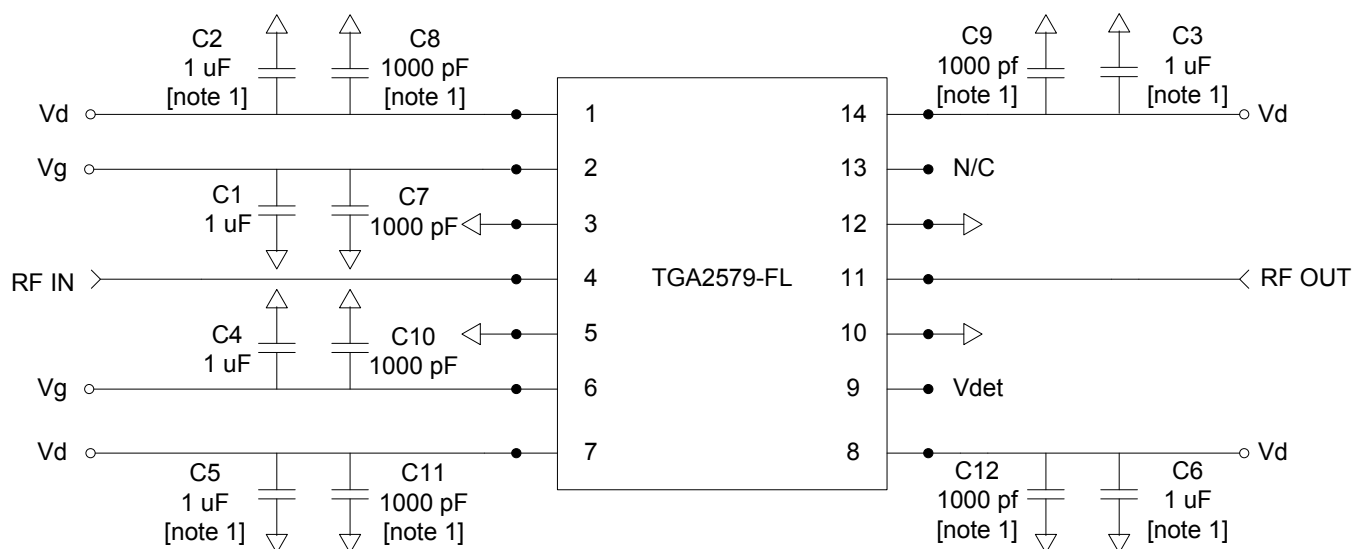


Note 1: Remove cap for pulsed drain operation

Bias-up Procedure	Bias-down Procedure
Turn Vg to -5 V	Turn off RF signal
Turn Vd (all pins) to 25 V	Reduce Vg to -5 V. Ensure Id ~ 0 mA
Adjust Vg more positive until quiescent Id is 1.0 A. This will be Vg ~ -3.4 V typical	Turn Vd (all pins) to 0 V
Apply RF signal	Turn Vg to 0 V

# TGA2579-FL

25 Watt Ku-Band GaN Power Amplifier

## Pin Description

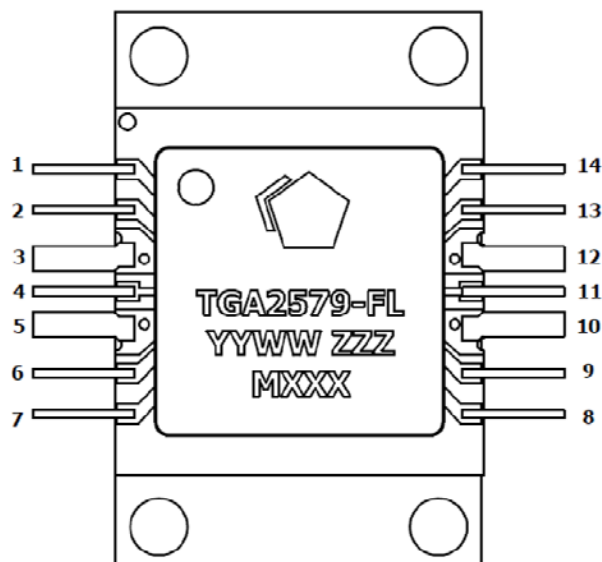


Pin #	Symbol	Description
1	Vd	Top side 1 <sup>st</sup> and 2 <sup>nd</sup> stage Drain voltage. Bias network is required; all Drain voltage pins must be connected and biased; see Application Circuit on page 7 as an example.
2,6	Vg	Gate voltage. Bias network is required; both top and bottom sides must be connected and biased; see Application Circuit on page 7 as an example.
3,5,10,12	Gnd	Connect to Ground; see Application Circuit on page 7 as an example
4	RF In	Input, matched to 50 ohms
7	Vd	Bottom side 1 <sup>st</sup> and 2 <sup>nd</sup> stage Drain voltage. Bias network is required; all Drain voltage pins must be connected and biased; see Application Circuit on page 7 as an example.
8	Vd	Bottom side 3 <sup>rd</sup> stage Drain voltage. Bias network is required; all Drain voltage pins must be connected and biased; see Application Circuit on page 7 as an example.
9	Vdet	Vdetect; see Application Circuit on page 7 as an example.
11	RF Out	Output, matched to 50 ohms
13	N/C	No internal connection, may be left open.
14	Vd	Top side 3 <sup>rd</sup> stage Drain voltage. Bias network is required; all Drain voltage pins must be connected and biased; see Application Circuit on page 7 as an example.



# TGA2579-FL

## 25 Watt Ku-Band GaN Power Amplifier

### Evaluation Board Layout

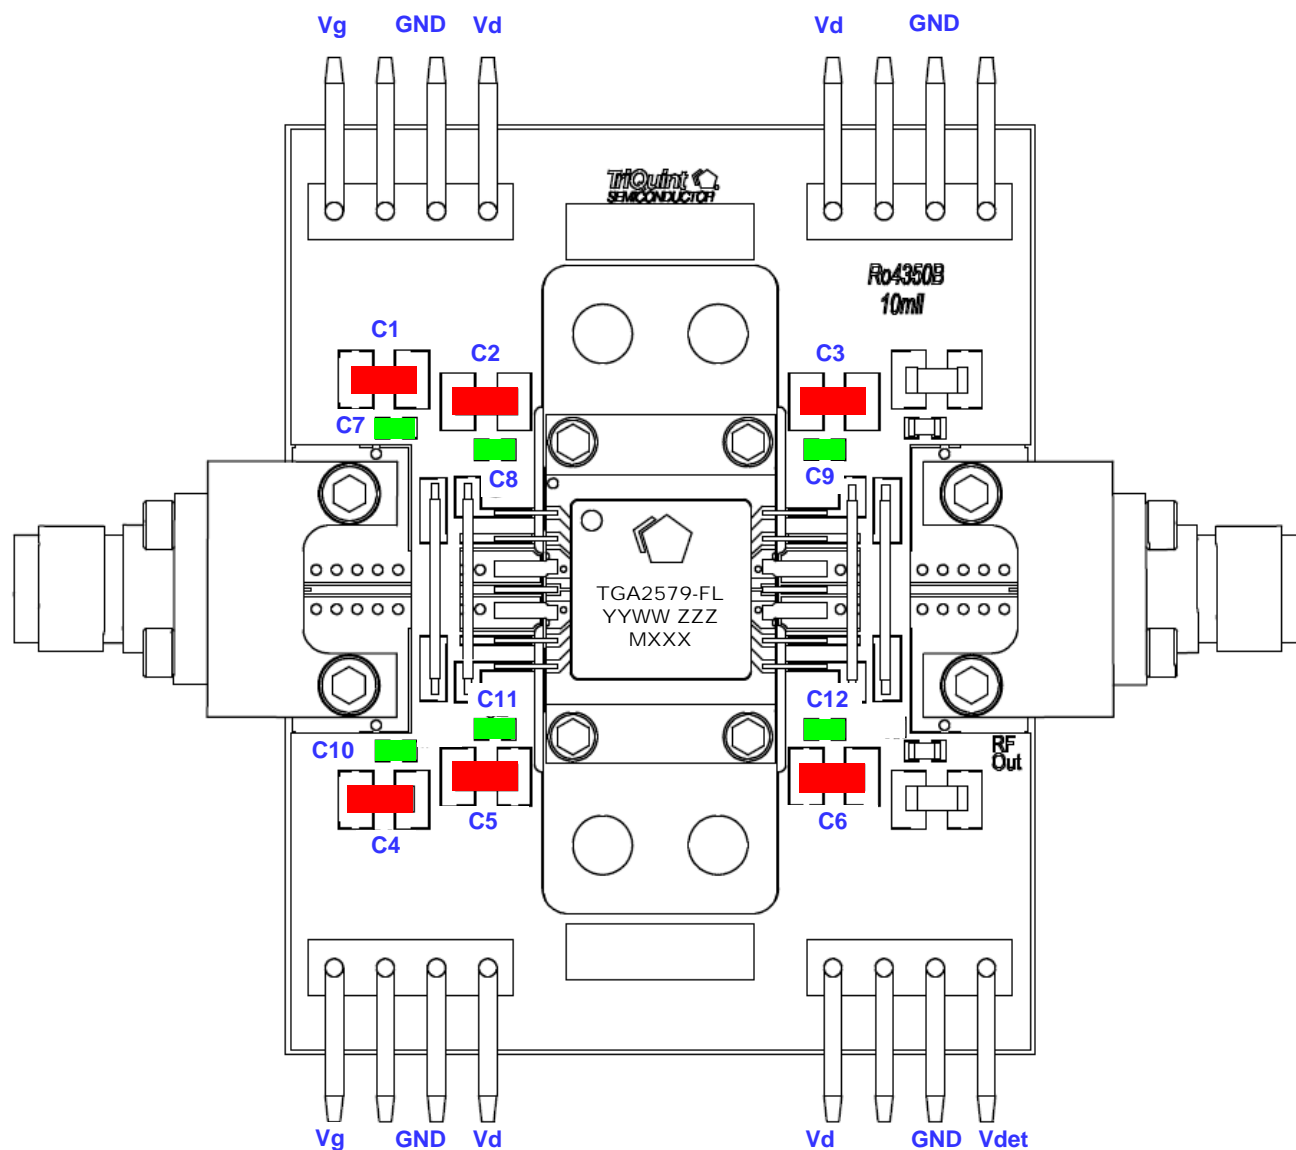


### Bill of Material

Ref Des	Value	Description	Manufacturer	Part Number
C1-6	1 uF	Cap, 1206, 50V, 10%, XR7	Kemet	C1206C105K5RACTU
C7-12	0.1 uF	Cap, 0603, 50V, 10%, XR7	Kemet	C0603C104K5RACTU

# TGA2579-FL

## 25 Watt Ku-Band GaN Power Amplifier

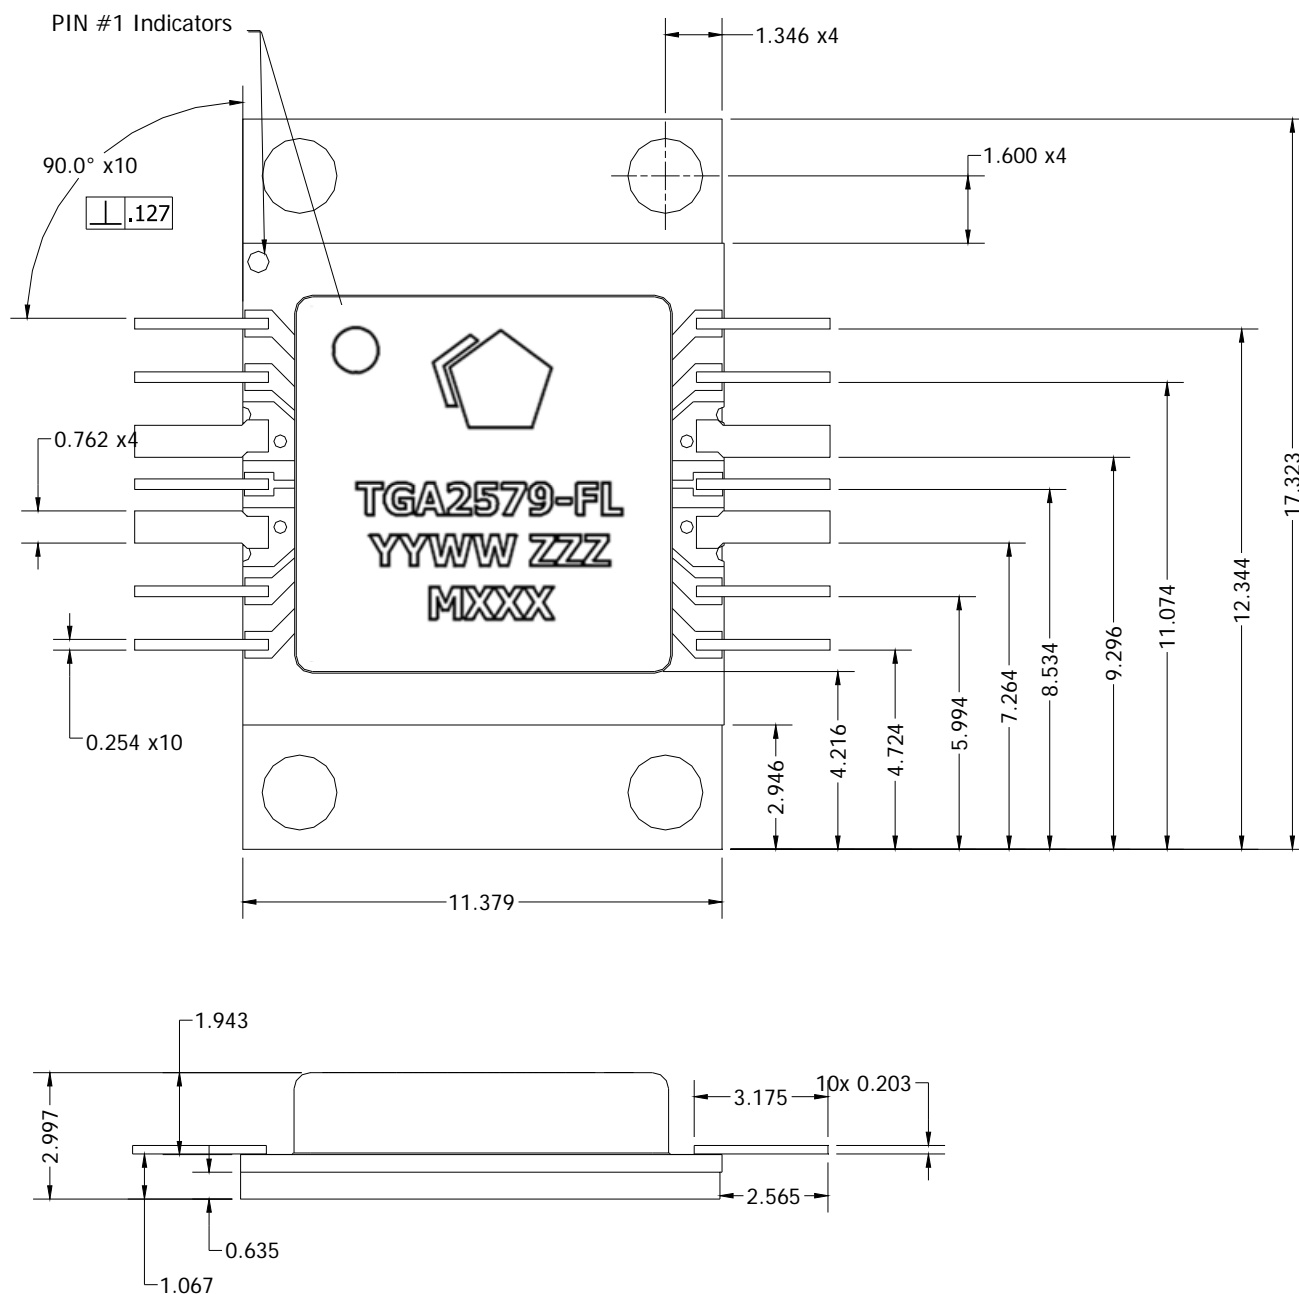

Unit: millimeters

Part marking:

<b>YY</b>	assembly lot start year
<b>WW</b>	assembly lot start week
<b>ZZZ</b>	part serial number
<b>MXXX</b>	batch ID

# TGA2579-FL

25 Watt Ku-Band GaN Power Amplifier

## Product Compliance Information

### ESD Information



#### Caution! ESD-Sensitive Device

ESD rating: TBD  
Value: Passes  $\geq$  TBD V min.  
Test: Human Body Model (HBM)  
Standard: JEDEC Standard JESD22-A114

### Solderability

This part is compliant with EU 2002/95/EC RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment).

This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C<sub>15</sub>H<sub>12</sub>Br<sub>4</sub>O<sub>2</sub>) Free
- PFOS Free

### ECCN

US Department of State: 3A001.b.2.b

## Assembly Notes

1. Clean the board or module with alcohol. Allow it to fully dry
2. Nylock screws are recommended for mounting the TGA2579-FL to the board
3. To improve the thermal and RF performance, we recommend a heat sink attached to the bottom of the board and/or apply thermal compound to the bottom of the TGA2579-FL
4. Apply solder to each pin of the TGA2579-FL.
5. Clean the assembly with alcohol.

# TGA2579-FL

## 25 Watt Ku-Band GaN Power Amplifier

---



### Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations, and information about TriQuint:

Web: [www.triquint.com](http://www.triquint.com)  
Email: [info-products@tqs.com](mailto:info-products@tqs.com)

Tel: +1.972.994.8465  
Fax: +1.972.994.8504

For technical questions and application information:

### Important Notice

The information contained herein is believed to be reliable. TriQuint makes no warranties regarding the information contained herein. TriQuint assumes no responsibility or liability whatsoever for any of the information contained herein. TriQuint assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for TriQuint products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

TriQuint products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.