

**TGBR5L45**

Preliminary


DIODE**TRENCH MOS SCHOTTKY
BARRIER RECTIFIER****DESCRIPTION**

The UTC **TGBR5L45** is a trench mos schottky barrier rectifier, it uses UTC's advanced technology to provide customers with low forward voltage drop and high current capability, etc.

The UTC **TGBR5L45** suitable for free wheeling, high frequency inverters, polarity protection, and low voltage.

FEATURES


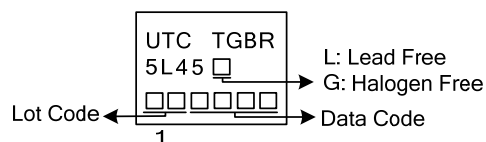
- * Low forward voltage drop
- * High current capability
- * High surge capability
- * High efficiency

SYMBOL**ORDERING INFORMATION**

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
TGBR5L45L-TN3-R	TGBR5L45G-TN3-R	TO-252	A	K	A	Tape Reel

Note: Pin Assignment: A: Anode K: Common Cathode

TGBR5L45L-TN3-R	(1)Packing Type	(1) R: Tape Reel
	(2)Package Type	(2) TN3: TO-252
	(3)Green Package	(3) L: Lead Free, G: Halogen Free and Lead Free

MARKING

TO-252

■ ABSOLUTE MAXIMUM RATINGS (T_A=25°C unless otherwise specified)

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitance load, derate current by 20%.

PARAMETER	SYMBOL	RATINGS	UNIT
DC Blocking Voltage (Note 1)	V _{RM}	45	V
Working Peak Reverse Voltage	V _{RWM}	45	V
Peak Repetitive Reverse Voltage	V _{RRM}	45	V
RMS Reverse Voltage	V _{R(RMS)}	32	V
Average Rectified Output Current T _C =125°C	I _O	5	A
Non-Repetitive Peak Forward Surge Current 8.3ms Single Half Sine-Wave Superimposed on Rated Load	I _{FSM}	90	A
Operating Junction Temperature	T _J	-65 ~ +175	°C
Storage Temperature	T _{STG}	-65 ~ +175	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.
Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL CHARACTERISTICS (Note 3)

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	θ _{JA}	110	°C/W
Junction to Case	θ _{JC}	6	°C/W

■ ELECTRICAL CHARACTERISTICS (T_A=25°C unless otherwise specified.)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Reverse Breakdown Voltage (Note 1)	V _{(BR)R}	I _R =0.50mA	45			V
Forward Voltage Drop	V _{FM}	I _F =5A, T _C =25°C			0.58	V
		I _F =5A, T _C =125°C			0.53	V
Peak Reverse Current at Rated DC Blocking Voltage (Note 1)	I _{RM}	V _R =45V, T _C =25°C			300	μA
		V _R =45V, T _C =125°C			40	mA

Notes: 1. Short duration pulse test used to minimize self-heating effect.

2. Thermal resistance junction to case mounted on heatsink.

3. Mounted on an FR4 PCB, single-sided copper, with 100cm² copper pad area.

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.