

isc Thyristors


TIC126series

DESCRIPTION

- 12A continuous on-state current
- 100A surge-current
- Glass passivated Wafer
- 400V to 800V off-state Voltage
- Max I_{GT} of 20mA
- 100% avalanche tested
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER		VALUE	UNIT
V_{DRM}	Repetitive peakoff-state voltage	TIC126D	400	V
		TIC126M	600	
		TIC126S	700	
		TIC126N	800	
V_{RRM}	Repetitive peakreverse voltage	TIC126D	400	V
		TIC126M	600	
		TIC126S	700	
		TIC126N	800	
$I_{T(AV)}$	On-state current $T_c=70^\circ\text{C}$		7.5	A
$I_{T(RMS)}$	RMS on-state current $T_c=70^\circ\text{C}$		12	A
I_{TM}	Surge peak on-state current		100	A
P_{GM}	Peak gate power $P_w \leq 300 \mu s$		5	W
$P_{G(AV)}$	Average gate power		1	W
T_j	Operating Junction temperature		110	$^\circ\text{C}$
T_{stg}	Storage temperature		-40 ~ +125	$^\circ\text{C}$

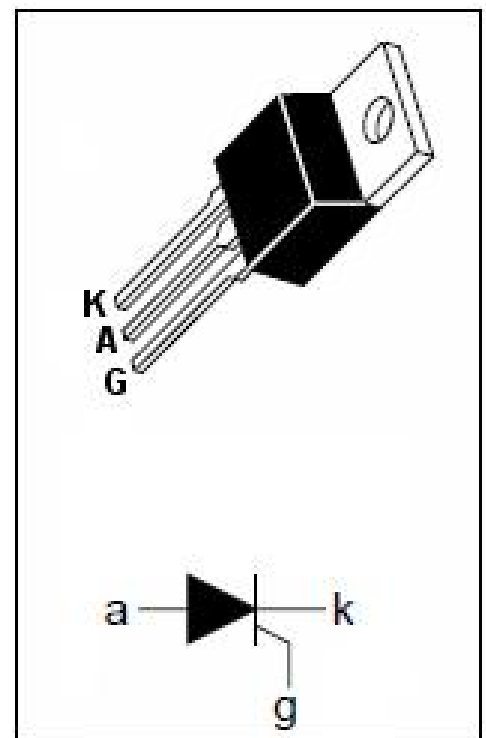

isc Thyristors

TIC126series

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MIN	TYP	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance, Junction to Case			2.4	°C/W
$R_{th\ j-a}$	Thermal Resistance, Junction to Ambient			62.5	°C/W

ELECTRICAL CHARACTERISTICS

 $T_C=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
I_{RRM}	Repetitive peak reverse current	$V_{RM}=V_{RRM}$, $V_{RM}=V_{RRM}$, $T_J=110^{\circ}\text{C}$			0.4 2.0	mA
I_{DRM}	Repetitive peak off-state current	$V_{DM}=V_{DRM}$, $V_{DM}=V_{DRM}$, $T_J=110^{\circ}\text{C}$			0.4 2.0	mA
V_{TM}	On-state voltage	$I_{TM}=12\text{A}$			1.4	V
I_{GT}	Gate-trigger current	$V_{AA}=12\text{V}$; $R_L=100\ \Omega$			20	mA
V_{GT}	Gate-trigger voltage	$V_{AA}=12\text{V}$; $R_L=100\ \Omega$			1.5	V
I_H	Holding current	$V_{AA}=12\text{V}$; $I_T=100\text{mA}$			40	mA

NOTICE:

ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.

ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.

ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.