



Micro Commercial Components

Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311

Phone: (818) 701-4933

Fax: (818) 701-4939

Features

- Output voltage can be adjusted to 36V
- Trapping current capability is 1 to 100 mA
- The effective temperature compensation in the working range of full temperature
- Low dynamic output impedance, its typical value is 0.2Ω
- Low output noise voltage
- Fast on-state response
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0

Maximum Ratings

Parameter	Symbol	Value	Unit
Input Voltage	V_I	37	V
Operating Temperature	T_{OPR}	0---70	°C
Storage Temperature Range	T_{STG}	-55---+150	°C


Electrical Characteristics @ 25°C Unless Otherwise Specified

Parameter	Sym	Min	Typ	Max	Test conditions
Reference Input Voltage	V_{ref}	2.45V	2.50V	2.55V	$V_{KA}=V_{REF}$, $I_{KA}=10mA$
Deviation of reference input voltage	$\Delta V_{ref}/\Delta T$		4.5mV	17mV	$V_{KA}=V_{REF}$, $I_{KA}=10mA$ $T_{min} \leq T_a \leq T_{max}$
Ratio of Change in Reference Input Voltage to the Change in Cathode Voltage	$\Delta V_{ref}/\Delta V_{KA}$		-1.0	-2.7	$\Delta V_{KA}=10V \sim V_{ref}$ $\Delta V_{KA}=36V \sim 10V$ $I_{KA}=10mA$
Reference Input Current	I_{ref}		1.5uA	4uA	$I_{KA}=10mA$, $R1=10K\Omega$ $R2=\infty$
Deviation of Reference Input Current Over Full Temperature Range	$\Delta I_{ref}/\Delta T$		0.4uA	1.2uA	$I_{KA}=10mA$, $R1=10K\Omega$ $R2=\infty$ $T_A=full\ Temperature$
Minimum Cathode Current for Regulation	$I_{KA(min)}$		0.45mA	1.0mA	$V_{KA}=V_{REF}$
Off-State Cathode Current	$I_{KA(OFF)}$		0.05uA	1.0uA	$V_{KA}=36V$, $V_{REF}=0V$
Dynamic Impedance	Z_{KA}		0.15 Ω	0.5 Ω	$V_{KA}=V_{REF}$, $I_{KA}=1\ to\ 100mA$, $f \leq 1.0KHz$

TL431V

Adjusttable Accurate Reference Source


SOT-23

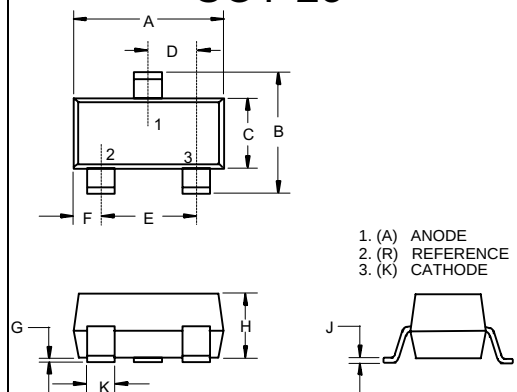

DIMENSIONS

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.110	.120	2.80	3.04	
B	.083	.098	2.10	2.64	
C	.047	.055	1.20	1.40	
D	.035	.041	.89	1.03	
E	.070	.081	1.78	2.05	
F	.018	.024	.45	.60	
G	.0005	.0039	.013	.100	
H	.035	.044	.89	1.12	
J	.003	.007	.085	.180	
K	.015	.020	.37	.51	

Suggested Solder Pad Layout

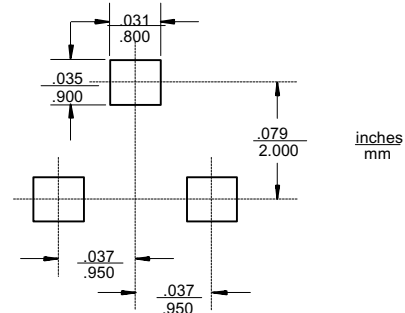



TM

Micro Commercial Components

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes .
Micro Commercial Components Corp. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

*****APPLICATIONS DISCLAIMER*****

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical,
Aerospace or Military Applications.