


Bicolor Symbol LED in 2.5 x 5 mm Untinted Top-Diffused Package

| Color | Type | Technology | Angle of Half Intensity $\pm\varphi$ |
|---------------------|-----------|--------------|---|
| High efficiency red | TLSV5100 | GaAsP on GaP | 50° |
| Green | TLSV5100G | GaP on GaP | 50° |

Features

- Even luminance of the emitting surface
- Ideal as flush mounted panel indicators
- For DC and pulse operation
- Color mixing possible due to separate anode terminals
- Luminous intensity selected into groups
- Categorized for green color
- Wide viewing angle
- Common cathode

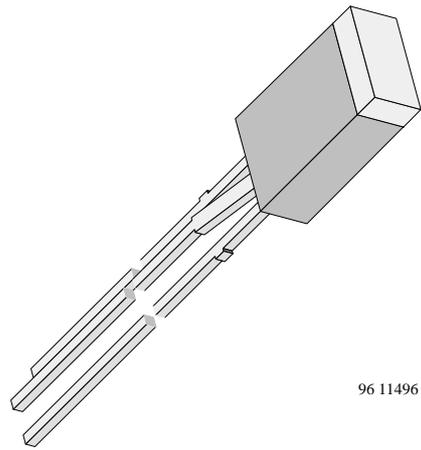

96 11496

Applications

Indicating and illumination purposes

Absolute Maximum Ratings

$T_{amb} = 25^{\circ}\text{C}$, unless otherwise specified

TLSV5100 , TLSV5100G ,

| Parameter | Test Conditions | Symbol | Value | Unit |
|---|--|------------|-------------|--------------------|
| Reverse voltage per diode | | V_R | 6 | V |
| DC forward current per diode | | I_F | 30 | mA |
| Surge forward current per diode | $t_p \leq 10 \mu\text{s}$ | I_{FSM} | 1 | A |
| Power dissipation per diode | $T_{amb} \leq 55^{\circ}\text{C}$ | P_V | 100 | mW |
| Total power dissipation | $T_{amb} \leq 55^{\circ}\text{C}$ | P_{tot} | 150 | mW |
| Junction temperature | | T_j | 100 | $^{\circ}\text{C}$ |
| Storage temperature range | | T_{stg} | -55 to +100 | $^{\circ}\text{C}$ |
| Soldering temperature | $t \leq 5 \text{ s}$, 2 mm from body | T_{sd} | 260 | $^{\circ}\text{C}$ |
| Thermal resistance junction/ambient per diode | | R_{thJA} | 450 | K/W |
| Thermal resistance junction/ambient total | | R_{thJA} | 300 | K/W |

Optical and Electrical Characteristics

$T_{amb} = 25^{\circ}\text{C}$, unless otherwise specified

High efficiency red (TLSV5100)

| Parameter | Test Conditions | Type | Symbol | Min | Typ | Max | Unit |
|-------------------------|---|------|-------------|------|----------|-----|------|
| Per diode | | | | | | | |
| Luminous intensity | $I_F = 10\text{ mA}$, $I_{Vmin}/I_{Vmax} \geq 0.5$ | | I_V | 0.63 | 1 | | mcd |
| Dominant wavelength | $I_F = 10\text{ mA}$ | | λ_d | 612 | | 625 | nm |
| Peak wavelength | $I_F = 10\text{ mA}$ | | λ_p | | 635 | | nm |
| Angle of half intensity | $I_F = 10\text{ mA}$ | | ϕ | | ± 50 | | deg |
| Forward voltage | $I_F = 20\text{ mA}$ | | V_F | | 2 | 3 | V |
| Reverse voltage | $I_R = 10\ \mu\text{A}$ | | V_R | 6 | 15 | | V |
| Junction capacitance | $V_R = 0$, $f = 1\text{ MHz}$ | | C_j | | 50 | | pF |

Green (TLSV5100G)

| Parameter | Test Conditions | Type | Symbol | Min | Typ | Max | Unit |
|-------------------------|---|------|-------------|------|----------|-----|------|
| Per diode | | | | | | | |
| Luminous intensity | $I_F = 10\text{ mA}$, $I_{Vmin}/I_{Vmax} \geq 0.5$ | | I_V | 0.63 | 1 | | mcd |
| Dominant wavelength | $I_F = 10\text{ mA}$ | | λ_d | 562 | | 575 | nm |
| Peak wavelength | $I_F = 10\text{ mA}$ | | λ_p | | 565 | | nm |
| Angle of half intensity | $I_F = 10\text{ mA}$ | | ϕ | | ± 50 | | deg |
| Forward voltage | $I_F = 20\text{ mA}$ | | V_F | | 2.4 | 3 | V |
| Reverse voltage | $I_R = 10\ \mu\text{A}$ | | V_R | 6 | 15 | | V |
| Junction capacitance | $V_R = 0$, $f = 1\text{ MHz}$ | | C_j | | 50 | | pF |

Typical Characteristics ($T_{amb} = 25^{\circ}\text{C}$, unless otherwise specified)

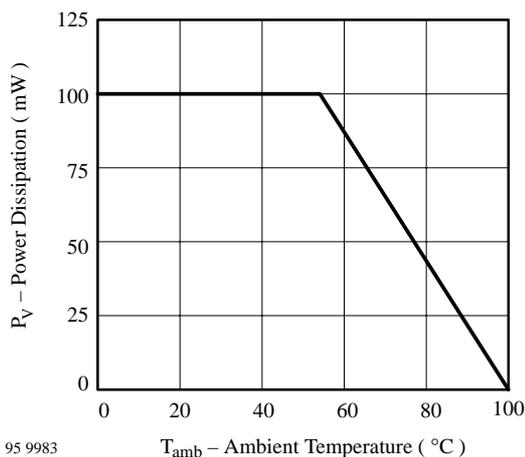


Figure 1 Power Dissipation vs. Ambient Temperature



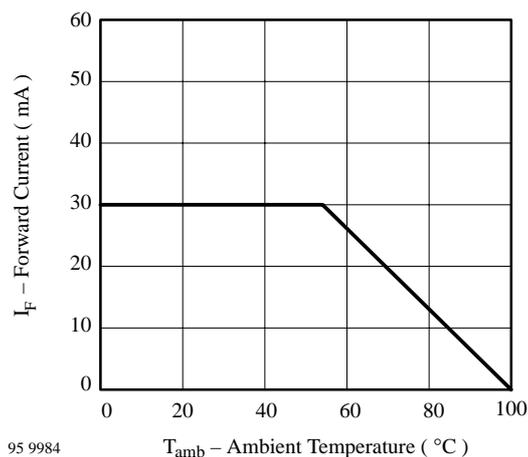


Figure 2 Forward Current vs. Ambient Temperature

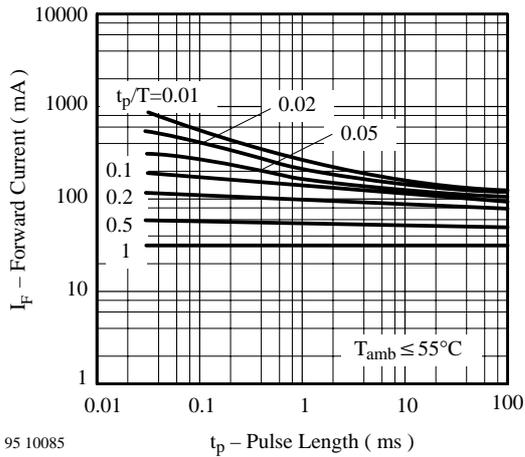


95 10085

Figure 3 Forward Current vs. Pulse Length

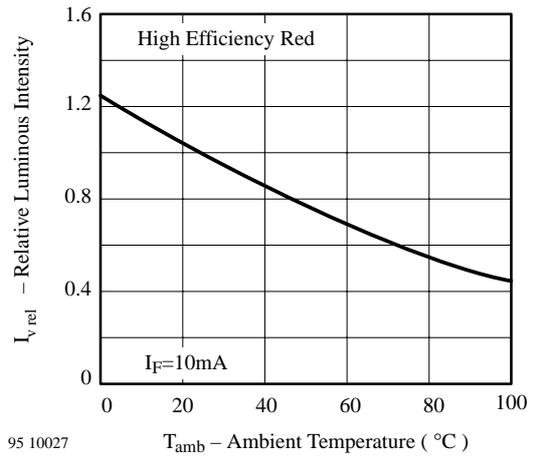


95 10027

Figure 6 Rel. Luminous Intensity vs. Ambient Temperature

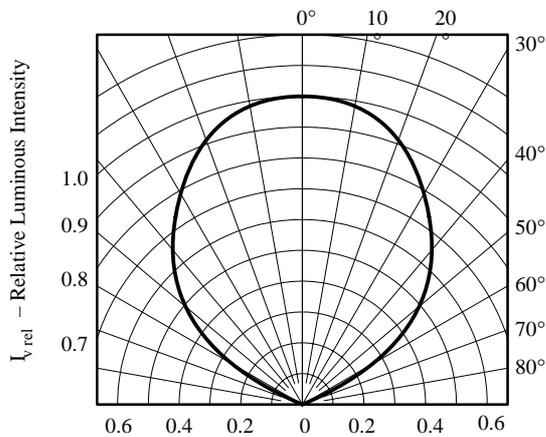


95 10082

Figure 4 Rel. Luminous Intensity vs. Angular Displacement

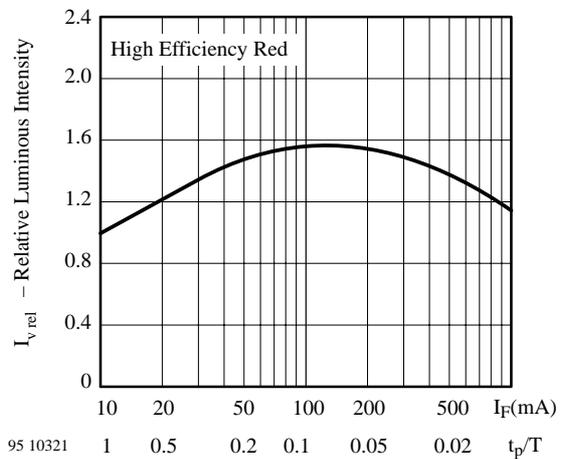


95 10321

Figure 7 Rel. Lumin. Intensity vs. Forw. Current/Duty Cycle

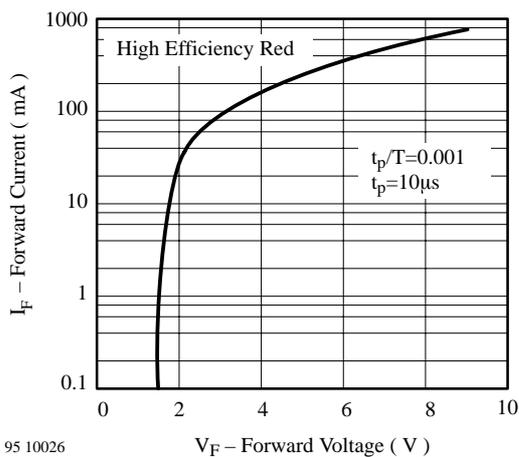

95 10026

Figure 5 Forward Current vs. Forward Voltage

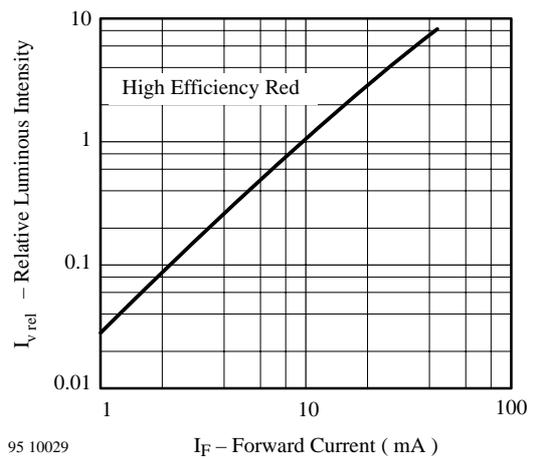

95 10029

Figure 8 Relative Luminous Intensity vs. Forward Current

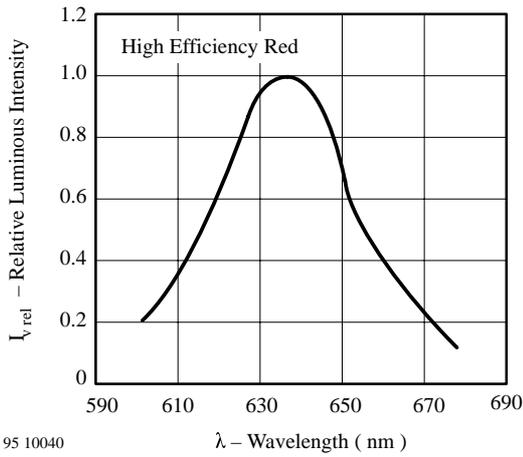


Figure 9 Relative Luminous Intensity vs. Wavelength

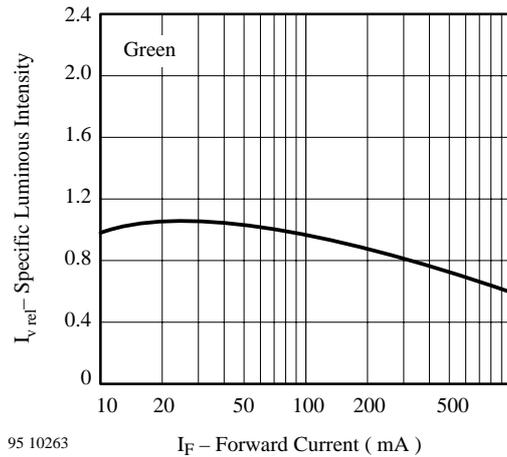


Figure 12 Specific Luminous Intensity vs. Forward Current

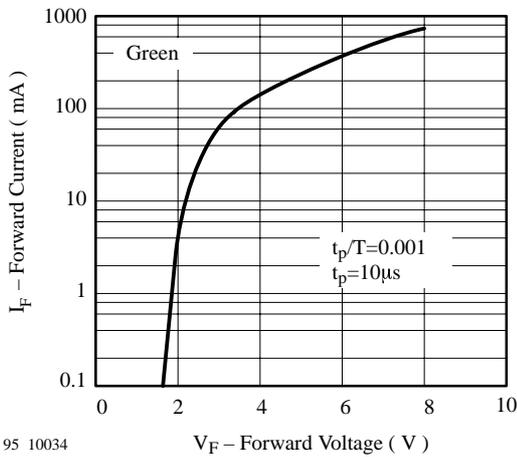


Figure 10 Forward Current vs. Forward Voltage

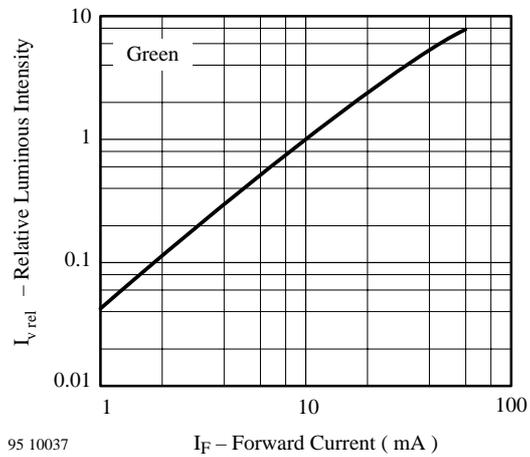


Figure 13 Relative Luminous Intensity vs. Forward Current

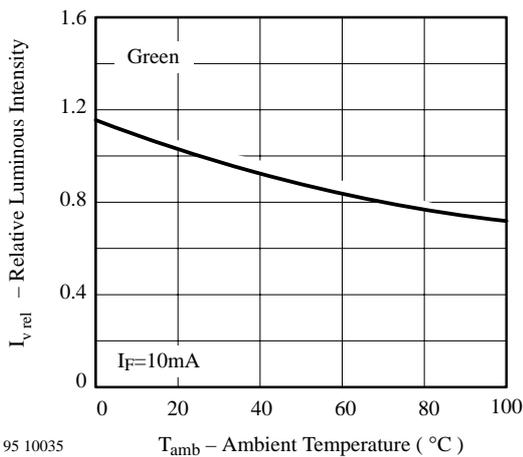


Figure 11 Rel. Luminous Intensity vs. Ambient Temperature


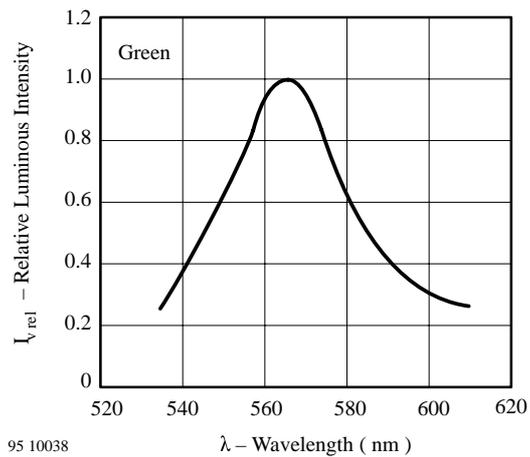


Figure 14 Relative Luminous Intensity vs. Wavelength

Dimensions in mm

95 11327

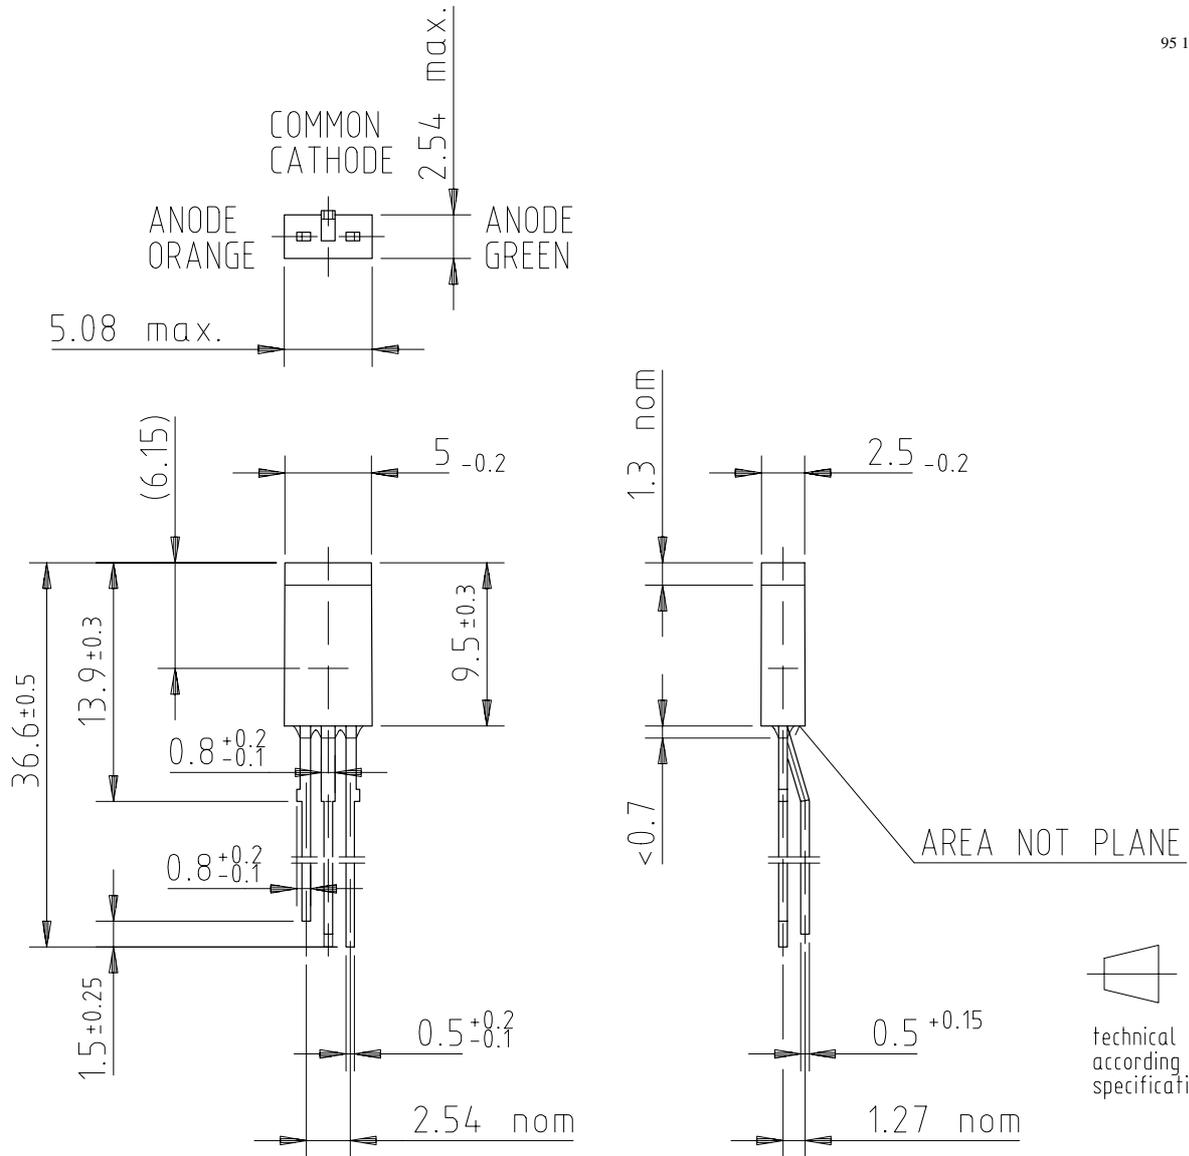

technical drawings according to DIN specifications

Ozone Depleting Substances Policy Statement

It is the policy of **Vishay Semiconductor GmbH** to

1. Meet all present and future national and international statutory requirements.
2. Regularly and continuously improve the performance of our products, processes, distribution and operating systems with respect to their impact on the health and safety of our employees and the public, as well as their impact on the environment.

It is particular concern to control or eliminate releases of those substances into the atmosphere which are known as ozone depleting substances (ODSs).

The Montreal Protocol (1987) and its London Amendments (1990) intend to severely restrict the use of ODSs and forbid their use within the next ten years. Various national and international initiatives are pressing for an earlier ban on these substances.

Vishay Semiconductor GmbH has been able to use its policy of continuous improvements to eliminate the use of ODSs listed in the following documents.

1. Annex A, B and list of transitional substances of the Montreal Protocol and the London Amendments respectively
2. Class I and II ozone depleting substances in the Clean Air Act Amendments of 1990 by the Environmental Protection Agency (EPA) in the USA
3. Council Decision 88/540/EEC and 91/690/EEC Annex A, B and C (transitional substances) respectively.

Vishay Semiconductor GmbH can certify that our semiconductors are not manufactured with ozone depleting substances and do not contain such substances.

We reserve the right to make changes to improve technical design and may do so without further notice.

Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer. Should the buyer use Vishay-Telefunken products for any unintended or unauthorized application, the buyer shall indemnify Vishay-Telefunken against all claims, costs, damages, and expenses, arising out of, directly or indirectly, any claim of personal damage, injury or death associated with such unintended or unauthorized use.

Vishay Semiconductor GmbH, P.O.B. 3535, D-74025 Heilbronn, Germany
Telephone: 49 (0) 7131 67 2831, Fax number: 49 (0) 7131 67 2423