


Type TLS Wet Tantalum Capacitors

MALLORY

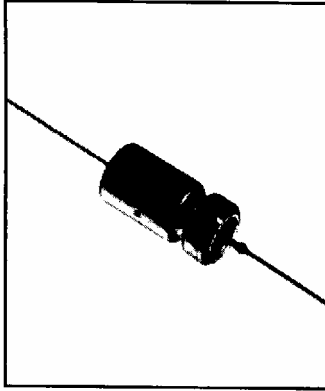

- Silver Case Technology
- High Capacitance per Case Size
- Extremely Low DCL
- Long Operating Life
- Rugged Mechanical Construction
- Wide Operating Temperature Range

GENERAL SPECIFICATIONS

Operating Temperature:
-55°C to +125°C

Voltage Range:
6 to 125 VDC @ 85°C
4 to 85 VDC @ 125°C


Capacitance:
1.7 to 1200 μ F

Tolerance Range:
 $\pm 20\%$, $\pm 10\%$
($\pm 5\%$ on special order)

TYPICAL APPLICATIONS

Filtering, coupling, bypass circuits
Critical timing circuits
Low source impedance circuits
High charging current circuits

Physical Specifications

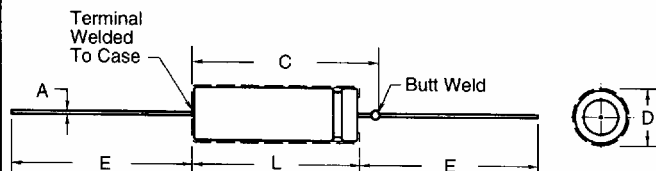

Part Number Nomenclature

TLS **405** **K** **060** **C** **1** **A**
(1) (2) (3) (4) (5) (6) (7)

1. TLS Series - Silver Case/Standard Capacitance Ratings
2. Capacitance Code (Expressed in Picofarads)
First 2 digits: Significant Figures
Third digit: Number of zeros (Example: 405 = 4 μ F)
3. Capacitance Tolerance:
M = $\pm 20\%$, K = $\pm 10\%$, J = $\pm 5\%$
4. DC Voltage Rating:
Zeros are used to precede the voltage rating where necessary to complete the three digit block
5. C = Temp Range
6. 1 = Mylar Sleeve
7. Case Size Code

INCHES

(DIMENSIONS)

MILLIMETERS

Case # MIL	Uninsulated D L $\pm .016$ $+.031, -.016$	Insulated D L Max Max	C Max	A Lead Dia Nom AWG	E Lead Lgth $\pm .250$	Approximate Weight (Grams) (1 gram = .035 Oz.)	Case # MIL	Uninsulated D L $\pm .41$ $+.79, -.41$	Insulated D L Max Max	C Max	A Lead Dia Nom AWG	E Lead Lgth ± 6.35
A T1	.188 .453	.219 .608	.734	.025 #22	1.500	1.4	A T1	4.78 11.51	5.56 15.45	18.64	.64 #22	38.10
B T2	.281 .641	.312 .796	.922	.025 #22	2.250	3.0	B T2	7.14 16.28	7.92 20.22	23.41	.64 #22	57.15
C T3	.375 .766	.406 .921	1.047	.025 #22	2.250	5.6	C T3	9.53 19.46	10.31 23.40	26.59	.64 #22	57.15
F T4	.375 1.062	.406 1.217	1.343	.025 #22	2.250	9.2	F T4	9.53 26.97	10.31 30.91	34.11	.64 #22	57.15

Cap μ F	Case Code	Catalog Number	Max DCL μ A 25°C 85°C/ 125°C	Max ESR Ω + 25°C	Max Z Ω -55°C	Max % Cap Change From 25°C -55°C +85°C +125°C
6 WVDC; 7 VDC Surge @ 85°C 4 WVDC; 4.7 VDC Surge @ 125°C						
30	A	TLS306*006C1A	1	2	4.0	100 -40 +10.5 +12
68	A	TLS686*006C1A	1	2	4.3	60 -40 +14 +16
140	B	TLS147*006C1B	1	3	2.0	40 -40 +14 +16
270	B	TLS277*006C1B	1	6.5	4.0	25 -44 +17.5 +20
330	C	TLS337*006C1C	2	7.9	2.0	20 -44 +14 +16
560	C	TLS567*006C1C	2	13	3.0	25 -64 +17.5 +20
1200	F	TLS128*006C1F	3	14	1.5	20 -80 +25 +25

8 WVDC; 9.2 VDC Surge @ 85°C 5 WVDC; 5.7 VDC Surge @ 125°C						
25	A	TLS256*008C1A	1	2	4.0	100 -40 +10.5 +12
56	A	TLS566*008C1A	1	2	4.0	59 -40 +14 +16
220	B	TLS227*008C1B	1	7	4.0	30 -44 +17.5 +20
430	C	TLS437*008C1C	2	14	2.8	25 -64 +17.5 +20
850	F	TLS857*008C1F	4	16	1.0	22 -80 +25 +25

Cap μ F	Case Code	Catalog Number	Max DCL μ A 25°C 85°C/ 125°C	Max ESR Ω + 25°C	Max Z Ω -55°C	Max % Cap Change From 25°C -55°C +85°C +125°C
10 WVDC; 11.5 VDC Surge @ 85°C 7 WVDC; 8 VDC Surge @ 125°C						
20	A	TLS206*010C1A	1	2	4.0	175 -32 +10.5 +12
47	A	TLS476*010C1A	1	2	5.0	100 -36 +14 +16
100	B	TLS107*010C1B	1	4	2.0	60 -36 +14 +16
180	B	TLS187*010C1B	1	7	3.6	40 -36 +14 +16
250	C	TLS257*010C1C	2	10	2.0	30 -40 +14 +16
390	C	TLS397*010C1C	2	16	2.9	25 -64 +17.5 +20
750	F	TLS757*010C1F	4	16	1.0	23 -80 +25 +25

15 WVDC; 17.2 VDC Surge @ 85°C 10 WVDC; 11.5 VDC Surge @ 125°C						
15	A	TLS156*015C1A	1	2	5.0	155 -24 +10.5 +12
33	A	TLS336*015C1A	1	2	5.0	90 -28 +14 +16
70	B	TLS706*015C1B	1	4	2.5	75 -28 +14 +16
120	B	TLS127*015C1B	1	7	4.0	50 -28 +17.5 +20
170	C	TLS177*015C1C	2	10	2.0	35 -32 +14 +16
270	C	TLS277*015C1C	2	16	3.0	30 -56 +17.5 +20
540	F	TLS547*015C1F	6	24	1.2	23 -80 +25 +25

* Insert Proper Letter Code For Tolerance: M = $\pm 20\%$, K = $\pm 10\%$, J = $\pm 5\%$

Type TLS Wet Tantalum Capacitors

MALLORY

Wet Tantalum Capacitors

Cap μ F	Case Code	Catalog Number	Max DCL μ A		Max ESR Ω + 25°C	Max Z Ω -55°C	Max % Cap Change From 25°C		
			25°C	85°C/ 125°C			-55°C	+85°C	+125°C
25 WVDC; 28.8 VDC Surge @ 85°C 15 WVDC;17.2 VDC Surge @ 125°C									
10	A	TLS106*025C1A	1	2	6.0	220	-16	+ 8	+ 9
22	A	TLS226*025C1A	1	2	4.8	140	-20	+10.5	+12
100	B	TLS107*025C1B	1	10	4.0	50	-28	+13	+15
180	C	TLS187*025C1C	2	18	3.8	32	-48	+13	+15
350	F	TLS357*025C1F	7	28	1.3	24	-70	+25	+25

30 WVDC; 34.5 VDC Surge @ 85°C 20 WVDC; 23 VDC Surge @ 125°C									
8	A	TLS805*030C1A	1	2	7.5	275	-16	+8	+12
15	A	TLS156*030C1A	1	2	8.0	175	-20	+10.5	+12
40	B	TLS406*030C1B	1	5	4.0	65	-24	+10.5	+12
88	B	TLS886*030C1B	1	8	2.4	60	-24	+13	+15
100	C	TLS107*030C1C	2	12	2.5	40	-28	+10.5	+12
150	C	TLS157*030C1C	2	18	4.0	35	-48	+13	+15
300	F	TLS307*030C1F	8	32	1.5	25	-60	+25	+25

50 WVDC; 57.5 VDC Surge @ 85°C 30 WVDC; 34.5 VDC Surge @ 125°C									
5	A	TLS505*050C1A	1	2	6.0	400	-16	+5	+6
10	A	TLS106*050C1A	1	2	4.0	250	-24	+8	+9
25	B	TLS256*050C1B	1	5	3.0	95	-20	+10.5	+12
47	B	TLS476*050C1B	1	9	3.0	70	-28	+13	+15
60	C	TLS606*050C1C	2	12	2.0	45	-16	+10.5	+12
82	C	TLS826*050C1C	2	16	3.0	45	-32	+13	+15
160	F	TLS167*050C1F	8	32	2.0	27	-50	+25	+25

60 WVDC; 69 VDC Surge @ 85°C 40 WVDC; 46 VDC Surge @ 125°C									
4	A	TLS405*060C1A	1	2	8.0	550	-16	+5	+6
8.2	A	TLS825*060C1A	1	2	5.0	275	-24	+8	+9
20	B	TLS206*060C1B	1	5	3.0	105	-16	+10.5	+12
39	B	TLS396*060C1B	1	9	4.0	90	-28	+10.5	+12
50	C	TLS506*060C1C	2	12	2.0	50	-16	+10.5	+12
68	C	TLS686*060C1C	2	16	3.0	50	-32	+10.5	+12
140	F	TLS147*060C1F	8	32	2.4	28	-40	+20	+20

Cap μ F	Case Code	Catalog Number	Max DCL μ A		Max ESR Ω + 25°C	Max Z Ω -55°C	Max % Cap Change From 25°C		
			25°C	85°C/ 125°C			-55°C	+85°C	+125°C
75 WVDC; 86.2VDC Surge @ 85°C 50 WVDC; 57.5 VDC Surge @ 125°C									
3.5	A	TLS355*075C1A	1	2	8.0	650	-16	+5	+6
6.8	A	TLS685*075C1A	1	2	5.0	300	-20	+8	+9
15	B	TLS156*075C1B	1	5	3.0	150	-16	+8	+9
33	B	TLS336*075C1B	1	10	4.0	90	-24	+10.5	+15
40	C	TLS406*075C1C	2	12	2.0	60	-16	+10.5	+12
56	C	TLS566*075C1C	2	17	4.0	60	-28	+10.5	+15
110	F	TLS117*075C1F	9	36	2.6	29	-35	+20	+20

100 WVDC; 115 VDC Surge @ 85°C 65 WVDC; 74.8 VDC Surge @ 125°C									
2.5	A	TLS255*100C1A	1	2	12.0	950	-16	+7	+8
4.7	A	TLS475*100C1A	1	2	6.0	500	-16	+7	+8
11	B	TLS116*100C1B	1	4	4.0	200	-16	+7	+8
22	B	TLS226*100C1B	1	9	4.0	100	-16	+7	+8
30	C	TLS306*100C1C	2	12	3.0	80	-16	+7	+8
43	C	TLS436*100C1C	2	17	4.0	70	-20	+7	+8
86	F	TLS866*100C1F	9	36	3.0	30	-25	+15	+15

125 WVDC; 144 VDC Surge @ 85°C 85 WVDC; 97.8 VDC Surge @ 125°C									
1.7	A	TLS175*125C1A	1	2	14.0	1250	-16	+7	+8
3.6	A	TLS365*125C1A	1	2	8.0	600	-16	+7	+8
9	B	TLS905*125C1B	1	5	5.0	240	-16	+7	+8
14	B	TLS146*125C1B	1	7	6.0	167	-16	+7	+8
18	C	TLS186*125C1C	2	9	3.0	129	-16	+7	+8
25	C	TLS256*125C1C	2	13	5.0	93	-16	+7	+8
56	F	TLS566*125C1F	10	40	4.0	32	-25	+15	+15

* Insert Proper Letter Code For Tolerance: M = $\pm 20\%$, K = $\pm 10\%$, J = $\pm 5\%$