
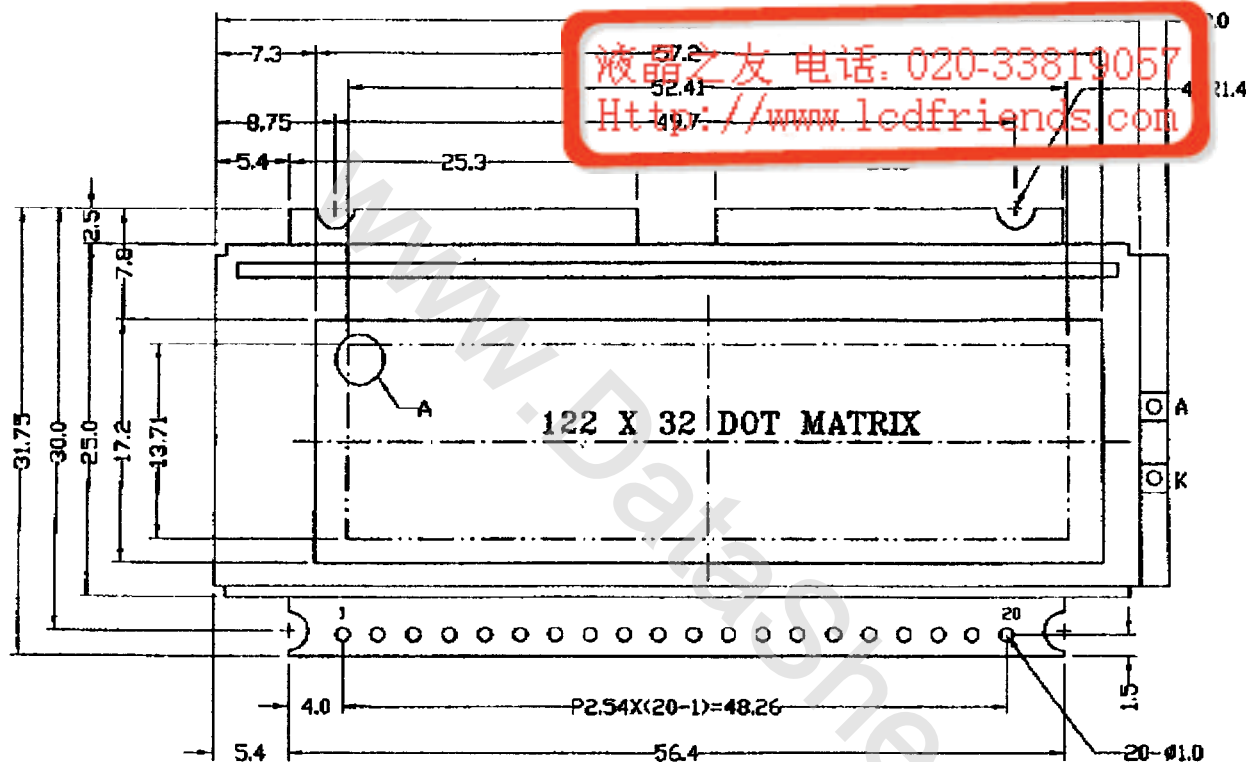


DETAIL A:



1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
V _{SS}	V _{DD}	V _O	V _{OUT}	A0	E1	E2	D0	D1	NC	NC	D2	D3	D4	D5	D6	D7	NC	NC	NC

NOTES:

- 1.DISPLAY TYPE: STN/B-W MODE
- 2.VIEWING DIRECTION: 600
- 3.POLARIZER MODE: TRANSFLECTIVE/POSITIVE
- 4.OPERATING TEMP: 0°C---+50°C
- 5.STORAGE TEMP: -20°C---+60°C
- 6.BEZEL IS TO BE PAINTED BLACK
- 7.ALL UNMARKED TOLERANCES: ±0.3
- 8.DRIVE METHOD: DUTY=1/32 BIAS=1/6
- 9.LCD OPERATING VOLTAGE: 5.9V
- 10.BACKLIGHT TYPE: LED
- 11.CONTROLLER: SED1520DOAX2



TIAN-MA MICROELECTRONICS CO.

22/F., MINGUO Building, Shennan Road, Central, Shenzhen, China

DRAWN BY: 梁斌 28-99

TITLE: TM12232ECC6

CHECKED BY: 梁斌 28-99

APPROVED BY: 王新 28-99

DWG NO: G-1

CONFIRMED BY: 王新 28-99

DWG NAME: TM12232ECC6-3 SHEET NO: 07



SCALE: 1:1

DATE: 2000.05.28