
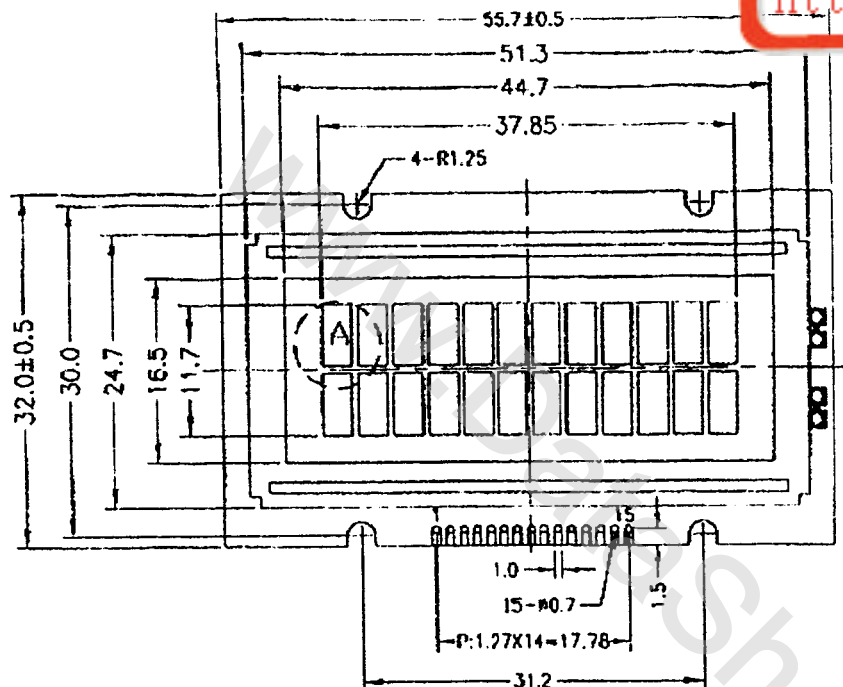


1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
VSS	VDD	VO	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	NC

DETAIL A:

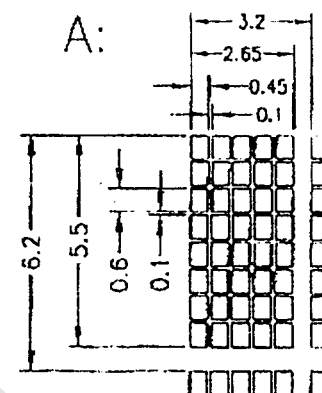

NOTES:

- 1.DISPLAY TYPE: TN
- 2.VIEWING DIRECTION: 6:00
- 3.POLARIZER MODE: REFLECTIVE/POSITIVE
- 4.DRIVE METHOD: 1/16 DUTY 1/5 BIAS
- 5.LCD OPERATING VOLTAGE: 4.5V
- 6.OPERATING TEMP: 0°C~+50°C
- 7.STORAGE TEMP: -20°C~60°C
- 8.CONTROLLER: KS0066UP-00CC
- 9.WITHOUT BACKLIGHT
- 10.BEZEL IS TO BE PAINTED BLACK
- 11.UNMARKED TOLERANCE: ±0.3mm



TIAN-MA MICROELECTRONICS CO.

6/F., CASTIC Building, Sherman Road, Central, Shenzhen, China

DRAWN BY: 罗慧东	TITLE: TM122AAA6	SCALE: 1:1
CHECKED BY: 潘伟东	DWG NO: G-1	UNIT: mm
APPROVED BY: 王彩东	DWG NAME: TM122AAA6G-1	SHEET NO: 01
CONFIRMED BY:		