
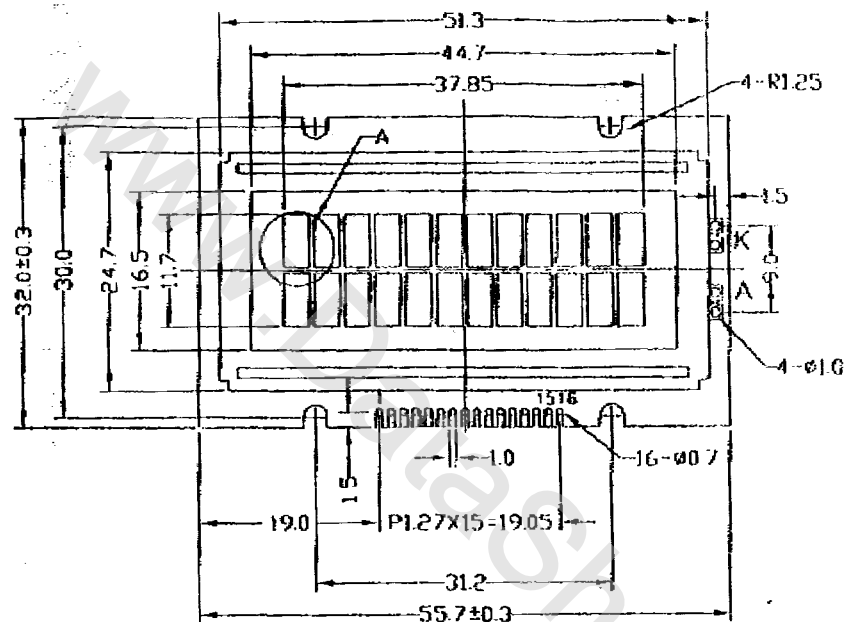


DETAIL A:



1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
VSS/KVDD	VO	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	A	NC	

NOTES:

- 1.DISPLAY TYPE: STN/YELLOW-GREEN MODE
- 2.VIEWING DIRECTION: 12:00
- 3.POLARIZER MODE: TRANSMISSIVE/POSITIVE
- 4.DRIVE METHOD: 1/16 DUTY 1/5 BIAS
- 5.LCD OPERATING VOLTAGE: 4.5V
- 6.OPERATING TEMP: 0°C~+50°C
- 7.STORAGE TEMP: -20°C~+60°C
- 8.CONTROLLER: S6A0069X01-COCX(KS0066UP-00CC)
- 9.BACKLIGHT: LED
- 10.BEZEL IS TO BE PAINTED BLACK
- 11.ALL UNMARKED TOLERANCE: ±0.3



TIAN-MA MICROELECTRONICS CO.

6/F., EASTIE Building, Shennan Road, Central, Shenzhen, China

DRAWN BY: 	TITLE: TM122ABFU6		
CHECKED BY: 	DWG NO: G-1		SCALE:
APPROVED BY: 	DWG NAME: TM122ABFU6-1		UNIT: (mm)
CONFIRMED BY:	SHEET NO: 01		